
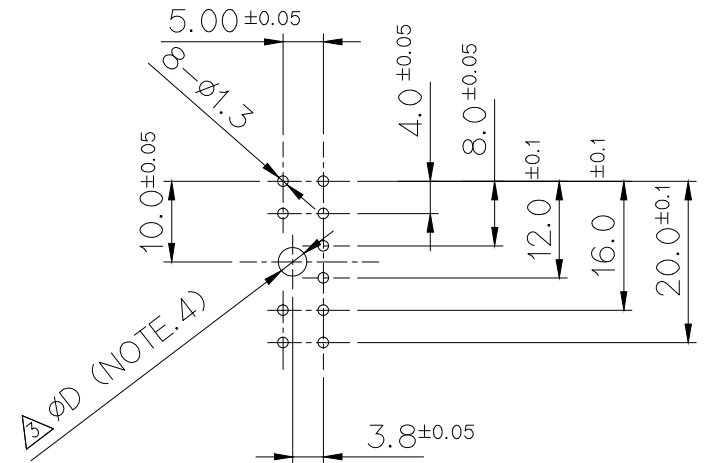

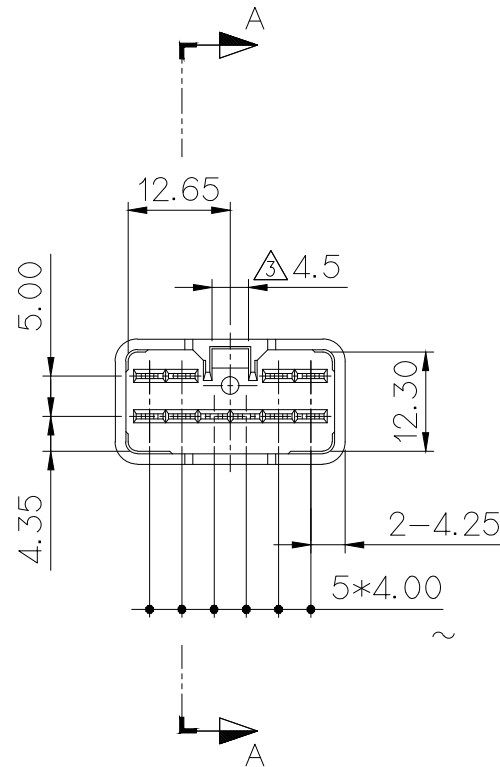
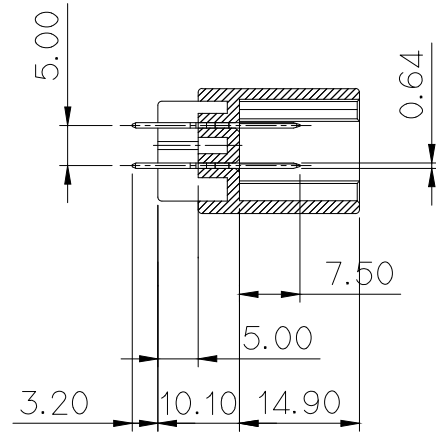
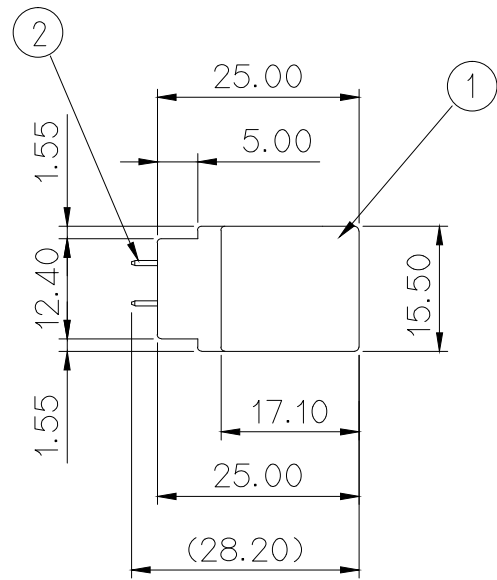
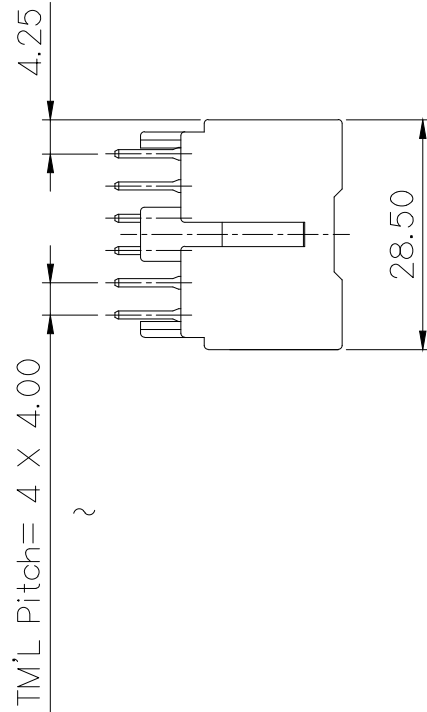

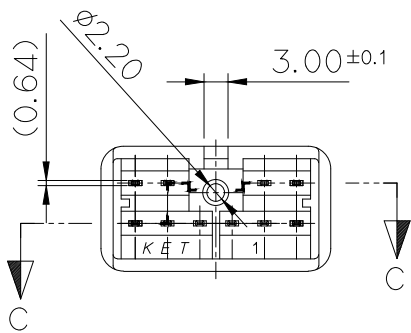


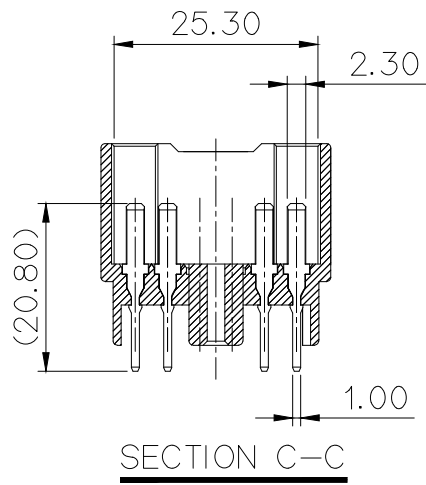

NOTE

- 지시하지 않는 R은 전부 0.5로 할것.
- 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 적용 HOUSING: MG651056
-  4. ϕD =SCREW 직경 +0.5
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.


NOTE

- UNLESS OTHER SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICATION HOUSING: MG651056
-  4. ϕD =SCREW DIAMETER +0.5
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

	NO.	PART NAME	PART NO.	ASSEMBLY
	1	090II 10M PCB ASSY(VRT)	MG641854	① + ②
	2		MG641854T	① + ③

NO.	PART NAME	PART NO.	MATERIAL	Q'TY	FINISH
①	090 II 10M PCB HOUSING (VRT)	MG671853	PBT	1	NATURAL
②	PCB MALE TERMINAL(VRT)	ST790215-3	BRASS	10	PRE-TIN
 ③		ST792347-2			TIN

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
③	설/변(ECO-1105-313)오기 수정	LSY			'11.04.29	WIRE RANGE		CLASS .090 II	
②	설/변(S100234) 근거	CYJ	한	조	'10.09.20	INSULATION		TYPE	
①	품명체제 변경에 따른 도면 재작성	PSH	조	한	'07.10.10	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			1/1	△ MG641854,1854T
DR. KO.98.05.12		CHK. KO.		3/20		PART NAME △ 090II 10M PCB ASSY(VRT TYPE)			
CHK.		APP. Han		3/20					

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 3

ISSUE MARK