
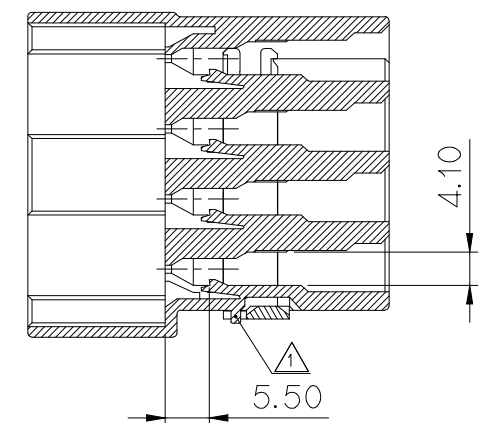
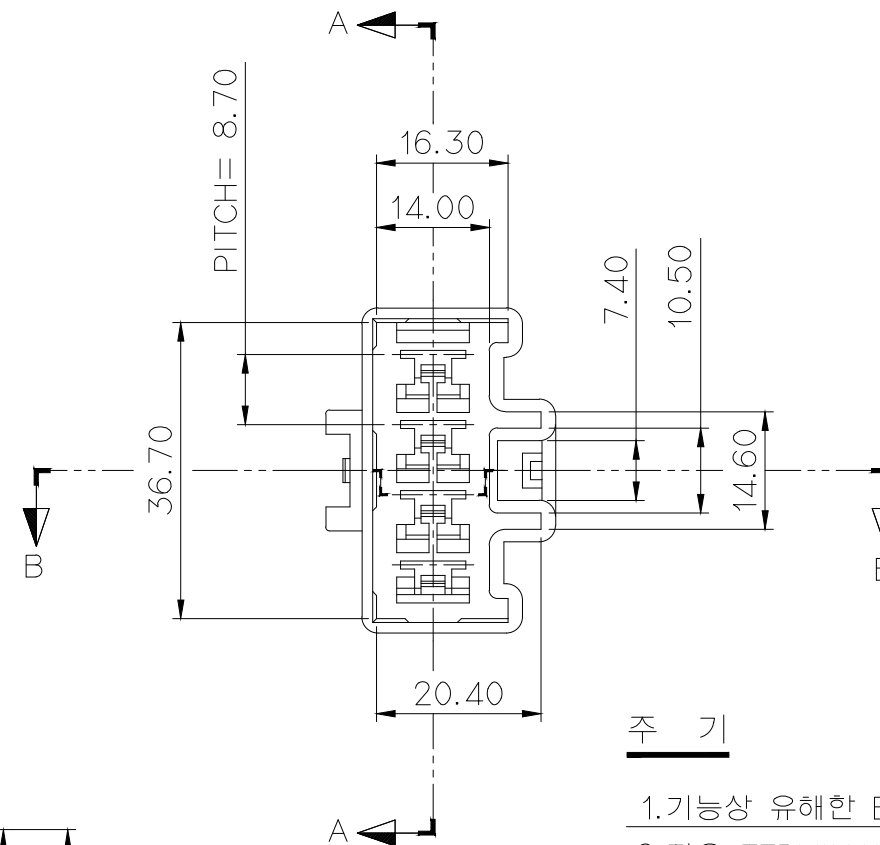
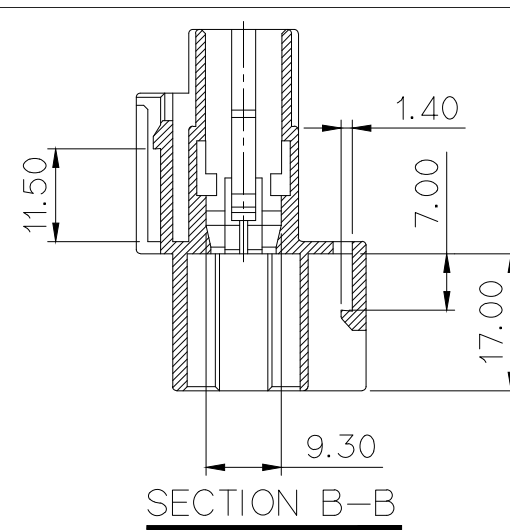
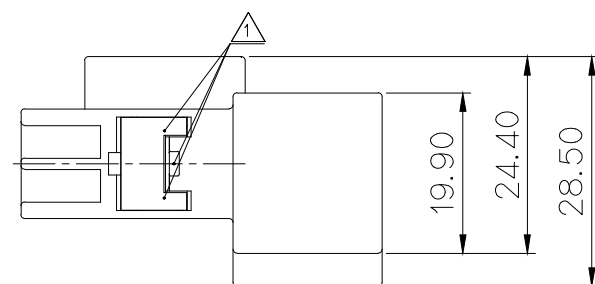
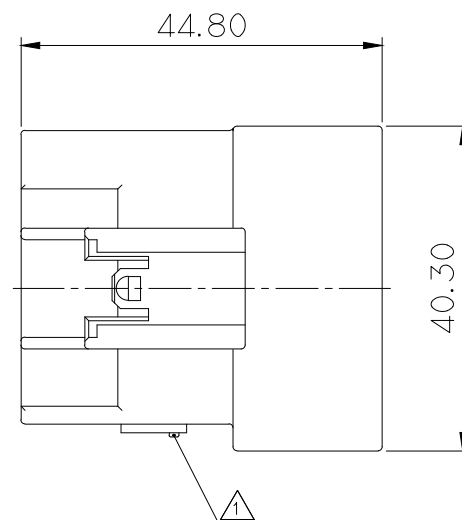
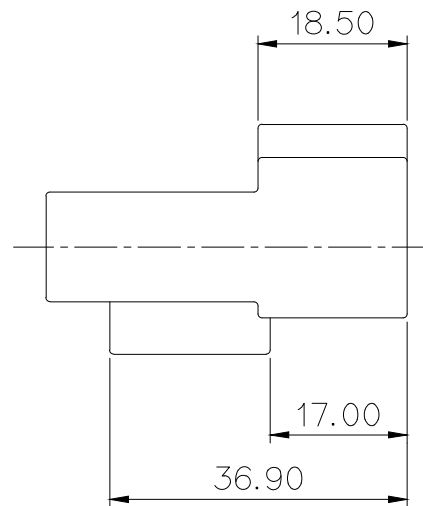


	NO.	MATERIAL	COLOR
*	0	P B T:	NATURAL
	1		RED
*	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
40	DARK GRAY		
41	LIGHT GRAY		
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8	LIGHT GREEN	
	9	MAGENTA	
	11	ORANGE	

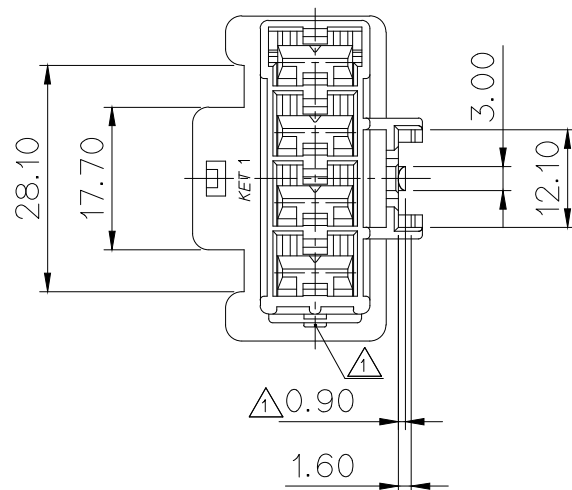

NOTE

- | |
|--|
| 1. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION. |
| 2. APPLICABLE TERMINAL : ST740600-3(7114-6041)
APPLICABLE CLIP : MG631267, MG631268, MG631471
APPLICABLE HOUSING : MG651926 |
| 3. CONNECTOR INSERTING FORCE & EXTRACTING FORCE : MAX 10kgf |
| 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM,
HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION. |

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	PART NO.	PART NAME	COLOR
1	MG671927	.312 II 4P REC. HS'G	 SEE TABLE
2	MG671925	.312 II 4P SPACER	YELLOW

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
-
2. 적용 TERMINAL: ST740600-3(7114-6041)
적용 CLIP: MG631267, MG631268, MG631471
적용 HOUSING: MG651926
-
3. CONNECTOR 삽입력 & 발거력: 10.0Kg 이하
-
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED
2020-12-10
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE TABLE FINISH SEE TABLE  KOREA ELECTRIC TERMINAL CO., LTD.	
					WIRE RANGE CLASS 312	
					INSULATION TYPE 7282-3040	
②	ECO-1801-401 근거도면변경	MSJ NKT	CJH	'18.02.05	TOLERANCE EXCEPT AS NOTED SEE TABLE	
①	ECO-1607-083 / ECO-1708-398 (SPACER 2차 로크 유지력 개선 및 도면 현실화)	MSJ KMH	CJH	'17.08.25	SCALE 1/1	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	PART NO. MG641928	
DR.	WON. 1999.7.22	CHK. KKJ 7.22			PART NAME .312 II 4P REC. HOUSING ASSEMBLY	
CHK.		APP. CHOSH 7.24				