


SECTION A-A



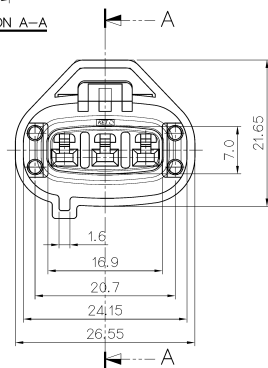


주 기

1. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
2. 적용 TERMINAL : ST730623, 624, 625(090 II W/P REC. TERM)

NOTE


1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730623, 624, 625(090 II W/P REC. TERM)



GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

GENERAL TOLERANCE (SILICONE RUBBER)					
50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
±0.2	±0.3	±0.5	±0.75	±30'	0.1

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG672008	.090 II W/P 3P REC. HS'G(ISCA)	PBT	GRAY
2	P900933	.090 II W/P 3P REC. INNER SEAL	SILICONE(OIL 함유)	RED



ISSUE MARK

					MATERIAL	SEE TABLE	 KET KOREA ELECTRIC TERMINAL CO., LTD.				
					FINISH	SEE TABLE					
					WIRE RANGE		CLASS S6189-0028				
					INSULATION		TYPE				
	사출품에 이물질이 들어 있을 경우 (특수 조립 라인 사용)				HEO	99. 09. 11. 09					
LTR	REVISION RECORD				DR	CHK	APP	DATE	PART NAME SEE TABLE	SCALE 2/1	PART NO. MG642009
DR	HEO '99.09.08				CHK	APP	CHEN	9/8			
CHK					APP	CHEN			9/15	.090 II WP 3P REC. ASS'Y (ISCA)	