
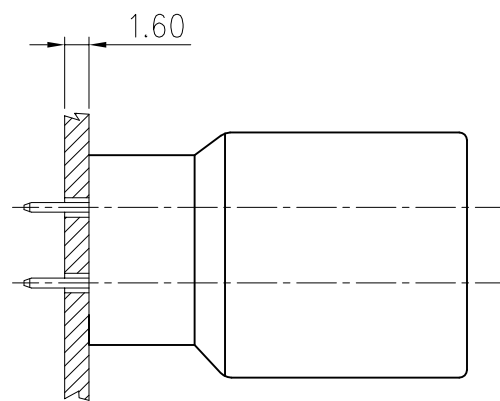
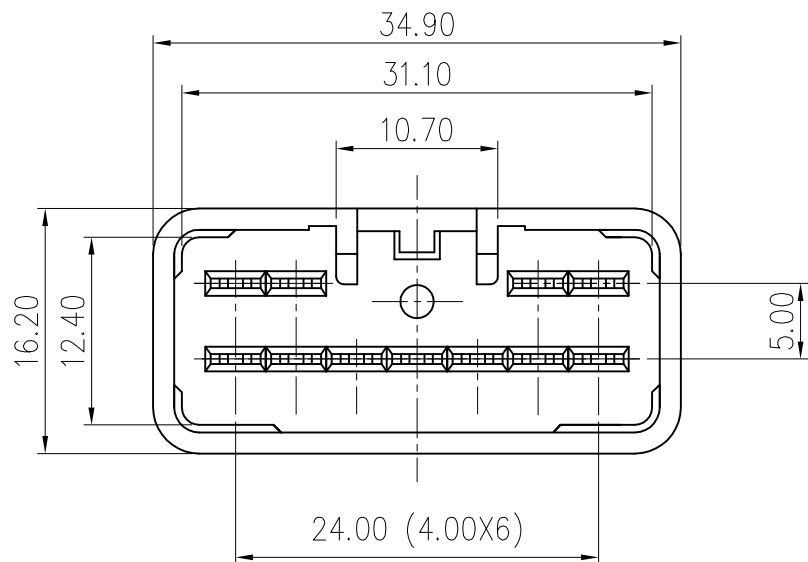
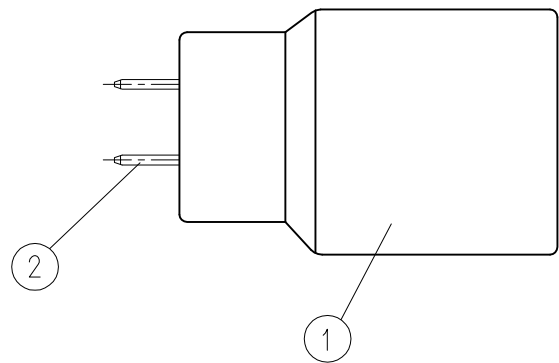
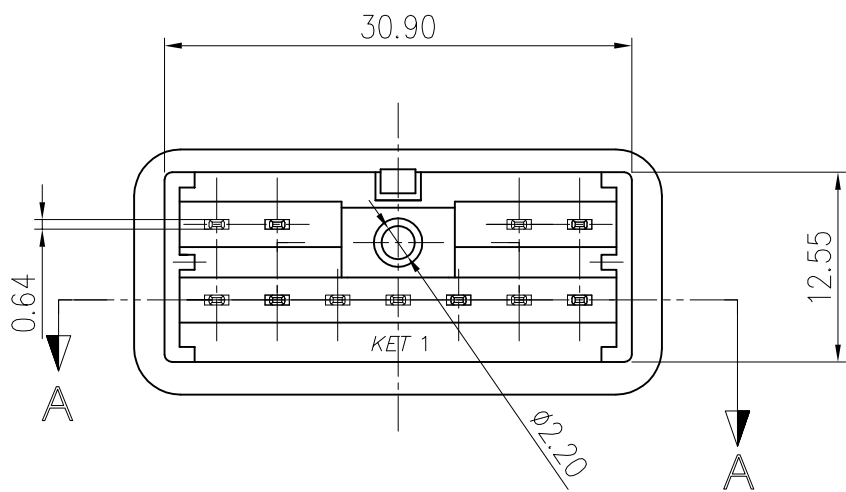
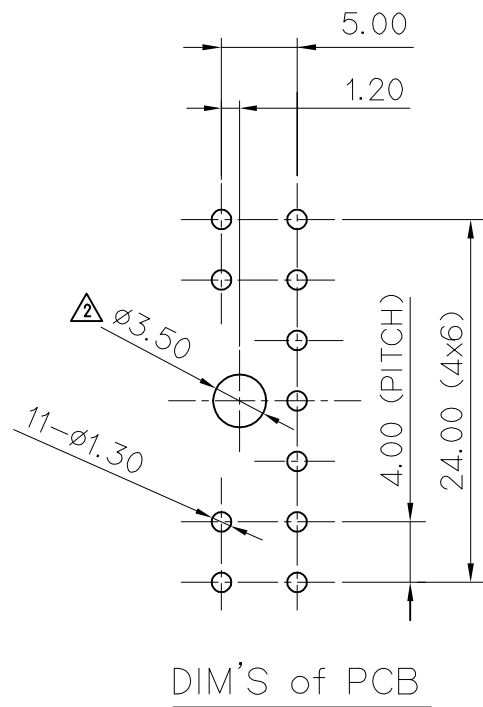
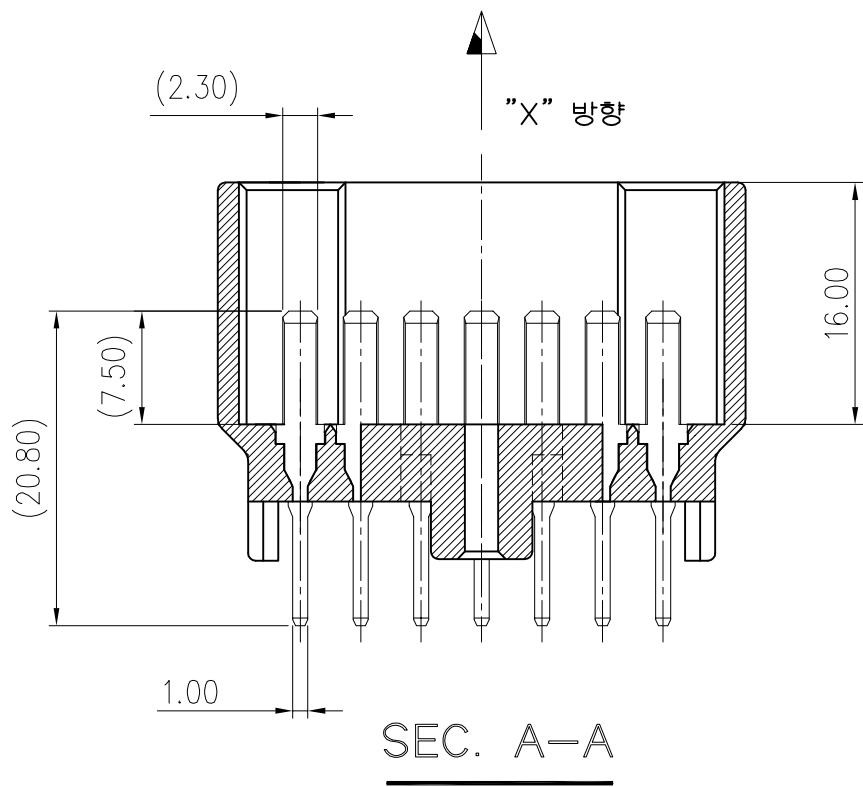


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)					USED ON
50MAX	100MAX	250MAX	ANGLE	ECCENT	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.3	±0.5	±30'	0.1	±0.2	±0.25	±0.3	±30'	0.1	

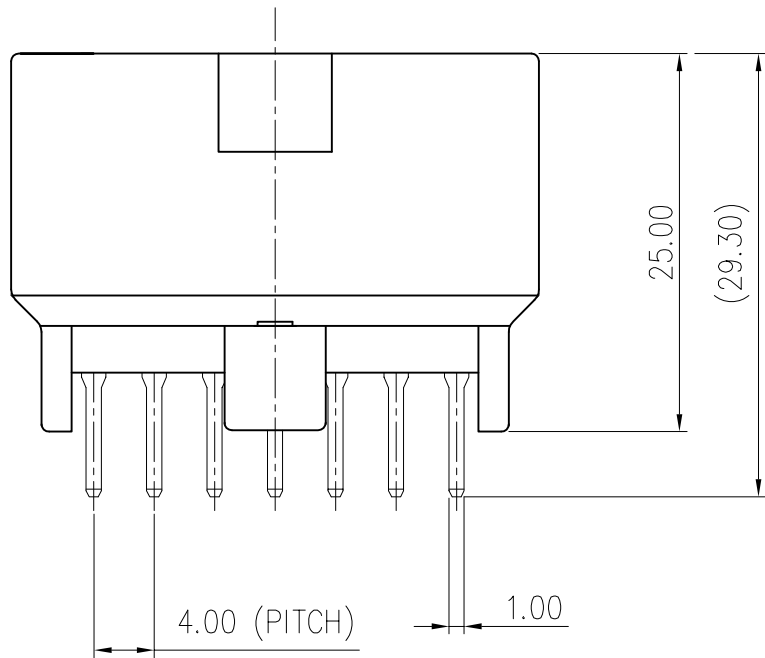

주 기

- 제품기능상 유해한 BURR,변형 및 WELDILE등이 없을것
- 적용 PLUG HS'G ASS'Y : MG651350
- X방향 Termindl 이탈력 2.0Kgf 이상일 것.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV지침 및 RoHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

NOTES

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION
- MAT'G PLUG HS'G ASS'Y : MG651350
- X Direction Terminal Disconnection power 2.0Kgf Above .
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,PBBs,PBDEs,HEXAVALENT CHROMIUM) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	PART NO.	ASSEMBLY
1	.090 II 11M PCB ASSY (VRT)	MG642016	① + ②
2		MG642016T	① + ③

NO.	PART NAME	PART NO.	MATERIAL	Q'TY	FINISH
①	.090 II PCB 11P HS'G(VRT)	MG672015	PBT	1	NATURAL
②	PCB TAB TERMINAL(VRT)	P900215	BRASS	11	PRE-TIN
③	PCB TAB TERMINAL(VRT)	ST792347-2	BRASS	11	UNPLATE TIN

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE	CLASS .090 II		
						INSULATION	TYPE		
	설/변(ECO-1105-313)도면 오기 수정	C.H			'11.05.17				
	설/변(S100195)로거	CYJ			'10.07.28				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.  MG642016,2016T
DR.	INO 99.10.30	CHK.	KO		10/30	PART NAME .090 II PCB 11P HS'G ASS'Y (VRT)			
CHK.	 10/30	APP.			10/30				