

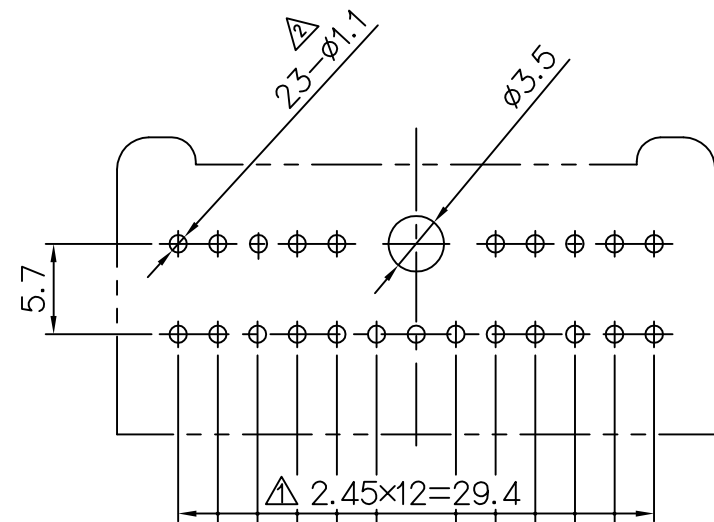
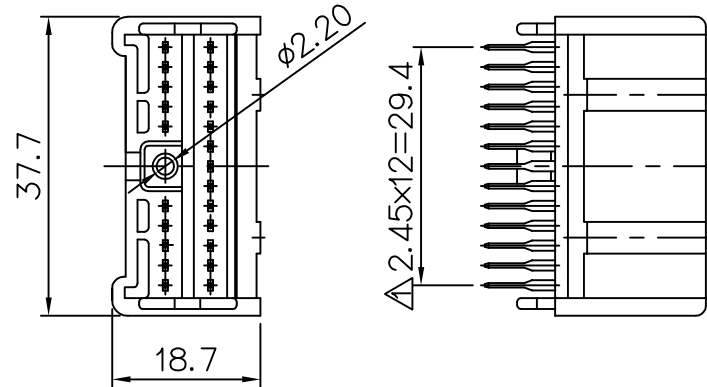
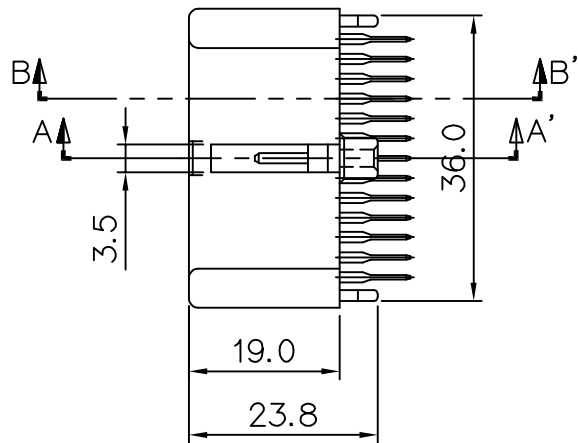
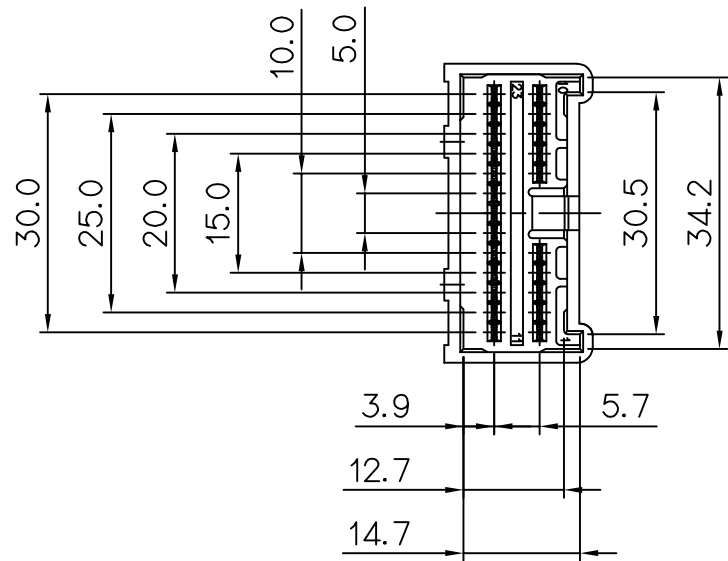



GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.20	±0.25	±0.30	±30'	0.10	±0.20	±0.30	±0.55	±0.95	±1.40	±30'	0.10	

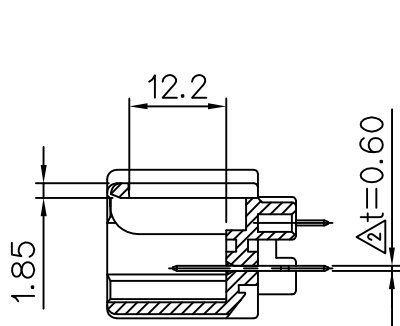

PRINT CRCUIT BOARD LAYOUT(t=1.6mm)
TOLERANCE: ±0.10(SCALE:2/1)

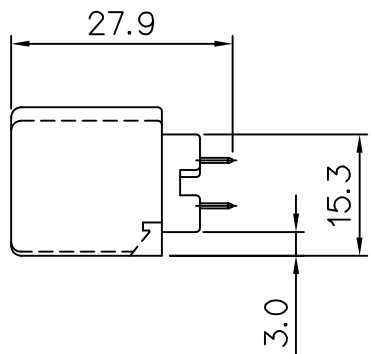

SECTION A-A'

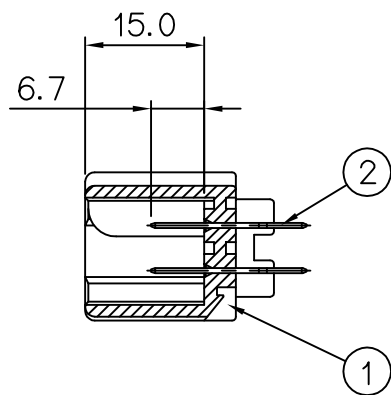

SECTION B-B'

NOTE

- 기능상 유해한 BURR 및 변형등이 없을것.
- 적용 PLUG HS'G : MG651563(050 23P PLUG HS'G)

NO.	PART NAME	MATERIAL	FINISH	Q'TY
1	050 23P PCB REC' HS'G	PBT	NATURAL	1EA
2	050 PCB TAB TM'L	BRASS	PRE-TIN	23EA



ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		CLASS 050
					INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE	PART NO.
OJM. 00.03,30		CHK. KO		'00,03,31		TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1
CHK.		APP.		H:\SHEET\2004\Wp-2-0F '00,03,31		PART NAME	
						050 23P PCB REC' ASS'Y(VRT)	