

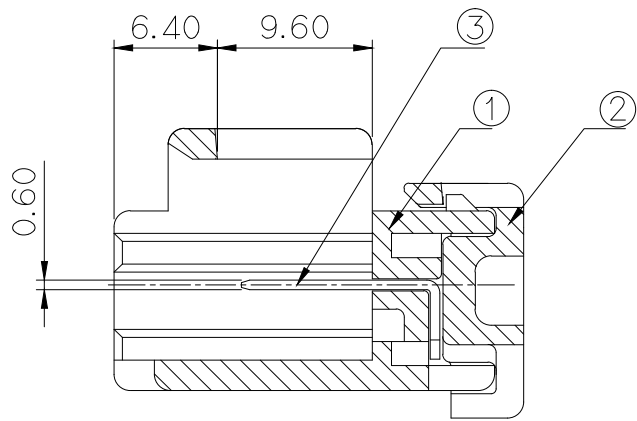
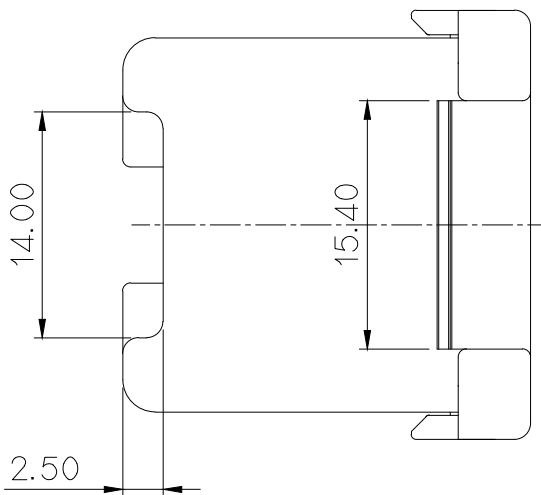
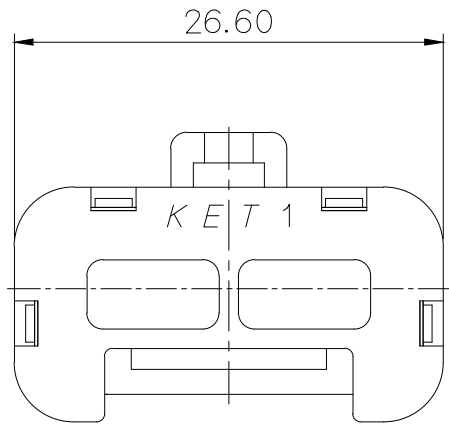
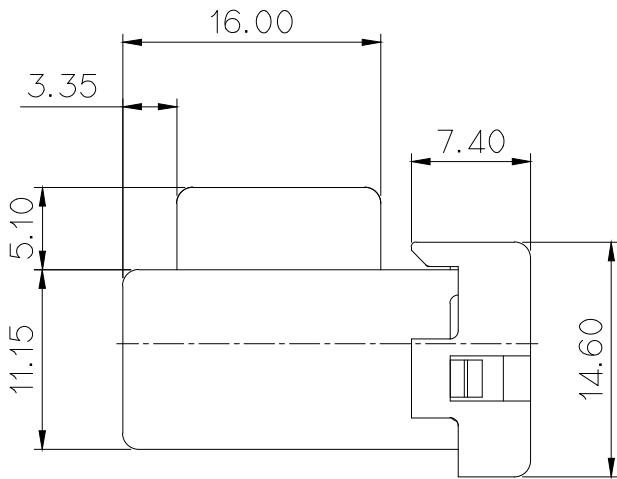


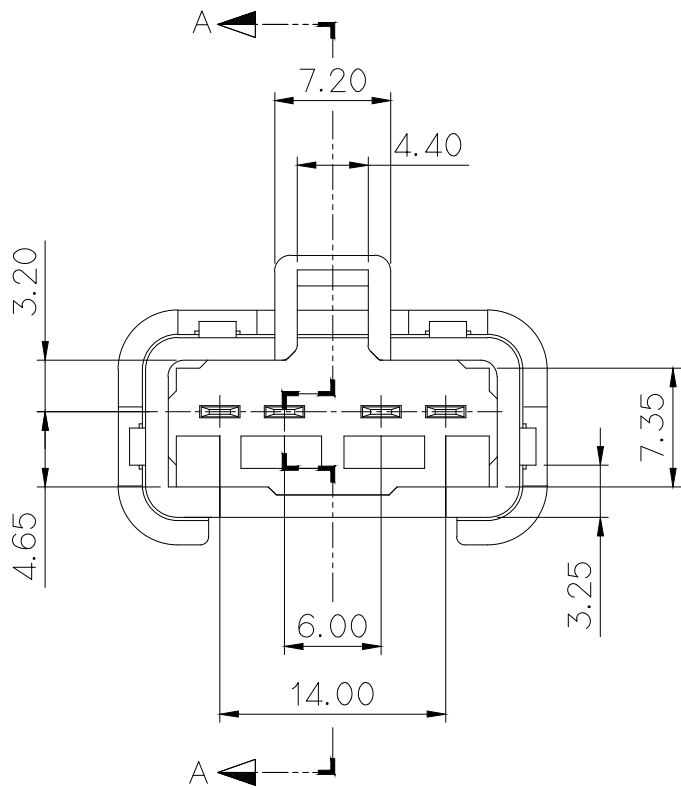

SECTION A-A

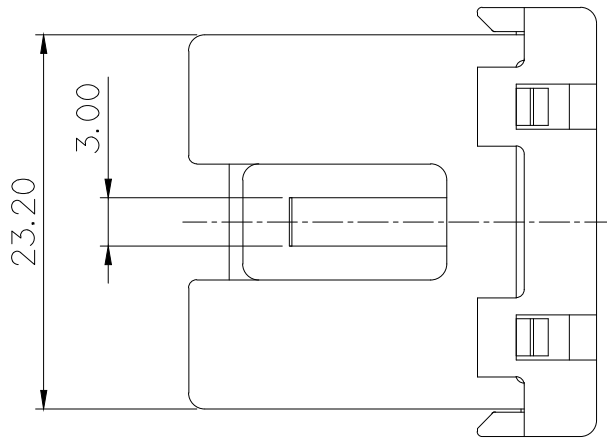

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG651038
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.5로 한다.
- 기능상 유해한 FLASH 및 SINK 변형 등이 없을것.
- 적용 CONNECTOR : MG651038
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG651038
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

③	P901264	090 II JOINT TAB 4WAY	BRASS	PRE-TIN
②	MG672195	090 II EARTH/JOINT 4P R/HOLDER	PBT	BROWN
①	MG672194	090 II JOINT 4P REC. HS'G (NON CLIP)	PBT	NATURAL
NO.	PART NO.	PART NAME	MATERIAL	FINISH

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE			CLASS .090 II
						INSULATION			TYPE
①	설계사양변경(S040148) 의거 도면 재작성	성민수	KKJ	KCH	04.10.14	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG642348
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME			
DR.	S.H.HEO 01.04.02	CHK. KKJ				090 II JOINT 4P REC. ASS'Y(NON CLIP)			
CHK.		APP. CHOSH							

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK