

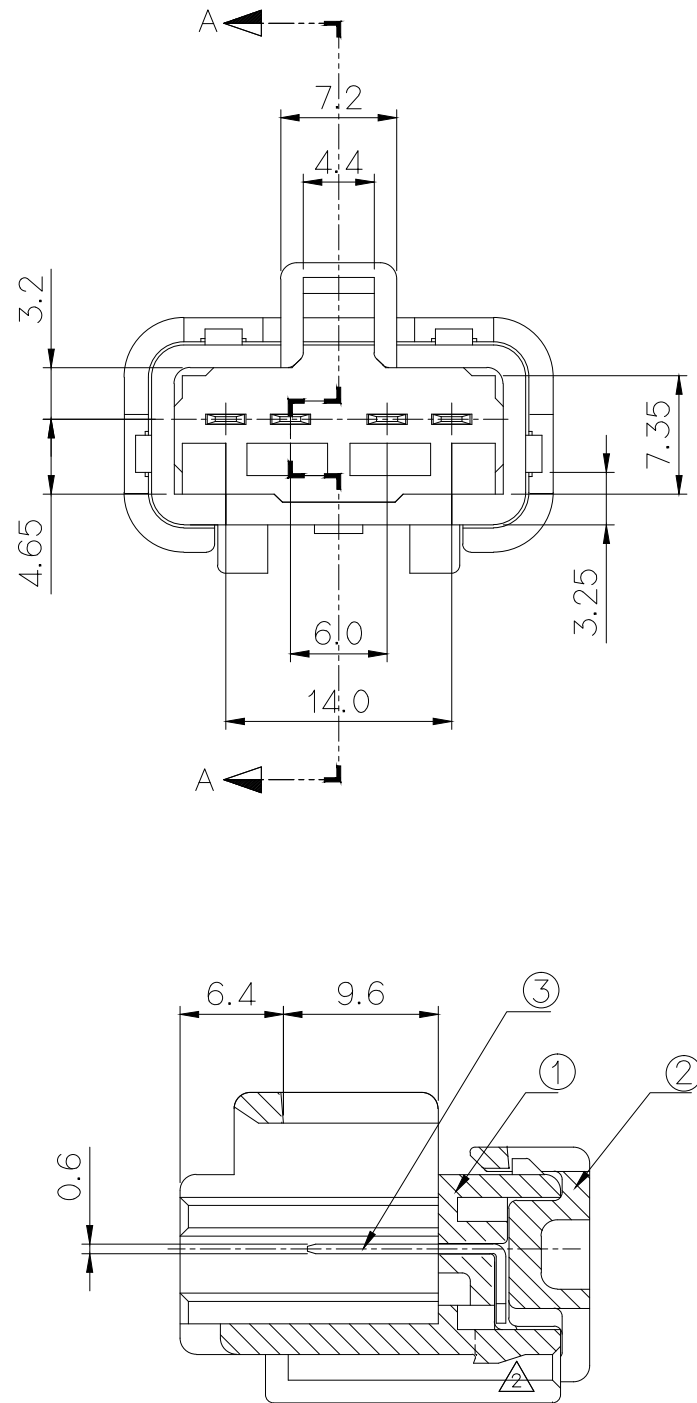
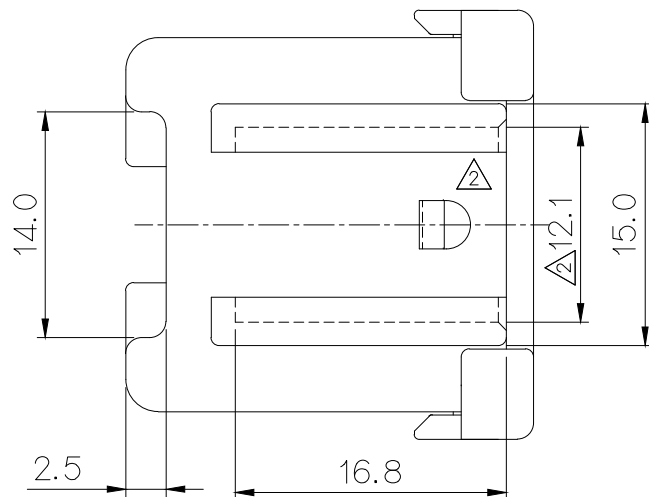


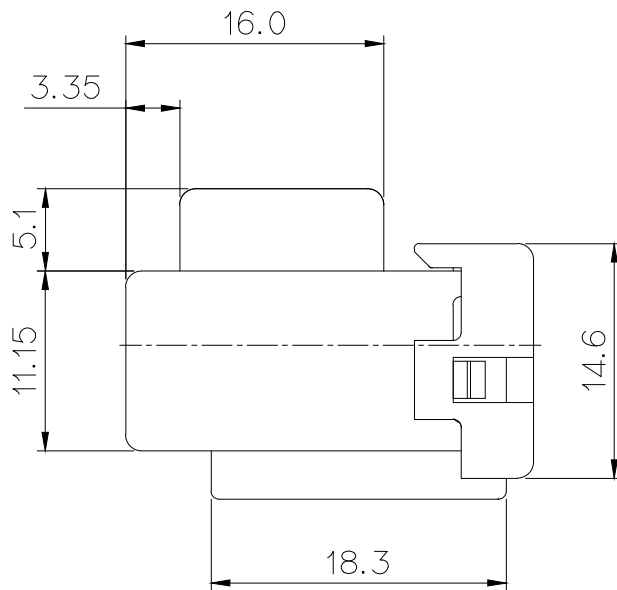


SECTION A-A

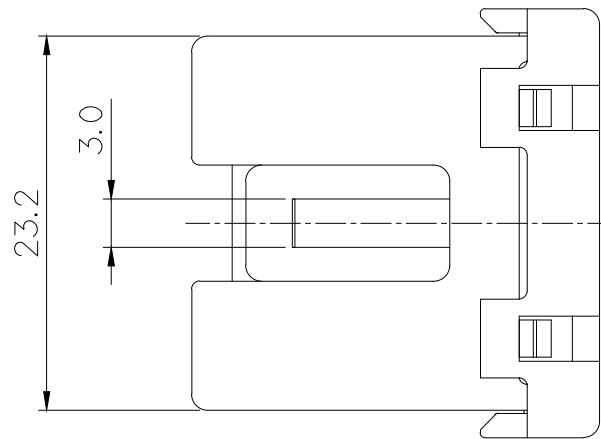

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG651038
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

③	P901264	090 II JOINT TAB 4WAY	BRASS	PRE-TIN
②	MG672195	090 II EARTH/JOINT 4P R/HOLDER	PBT	BROWN
①	MG672193	090 II JOINT 4P REC. HS'G(CLIP TYPE)	PBT	NATURAL BLACK
NO.	PART NO.	PART NAME	MATERIAL	FINISH

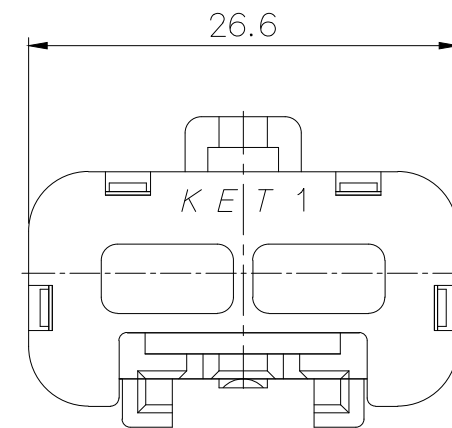

주 기

- 지시하지 않은 반경 R은 0.5로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 CONNECTOR : MG651038

NOTE


- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR : MG651038

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	.090 II
						INSULATION		TYPE	
LTR						TOLERANCE EXCEPT AS NOTED		SCALE	2/1
DR. S.H.HEO 01.04.02						PART NAME		PART NO.	MG642349
CHK. CHOSU 01.04.02						090 II JOINT 4P REC. ASS'Y(CLIP TYPE)			