



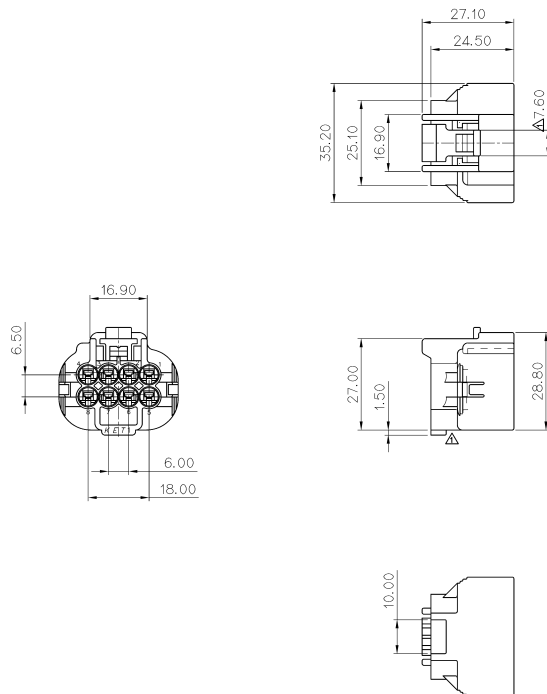


NOTES

1. MUST BE FREE OF FLASH AND IMPERFECTIONS THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST730623, ST730624, ST730625
3. APPLICABLE WIRE SEAL NO. : MG6801114, MG681115, MG681116, MG681119
4. F/HOLDER MUST NOT COME OFF HOUSING

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1	

3	MG672358	090II WP 8P REC HS'G	BLACK	PBT
2	P900698	090II WP 8P INNER SEAL	BLACK	SILICONE
1	MG671312	090II WP 8P REC HS'G F/H	WHITE	PBT
NO.	PART NO.	PART NAME	COLOR	MAT'L



NOTE

1. 기능상 유해한 BURR, 변형 등이 없을 것.
2. 적용 TERMINAL : ST730623, 624, 625
3. 적용 WIRE SEAL : MG681114, 1115, 1116, 1119
4. F/HOLDER는 HOUSING 에서 이탈되지 않을 것.



ISSUE MARK

						MATERIAL	SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	090II WP
						INSULATION		TYPE	7283-1081
△	시방번호 '030119'와 거 모든 재작성	LSV	03.06.18	DATE	THROUGH HOLE IN NOTES	SCALE	1/1	PART NO.	MG642357
LTR	REVISION RECORD	DR	CHK	APP.	DATE	SEE TABLE			
DR	KJLEE, '01.08.23	CHK				PART NAME			
CHK		APP.							
							090II WP 8P REC ASS'Y		