
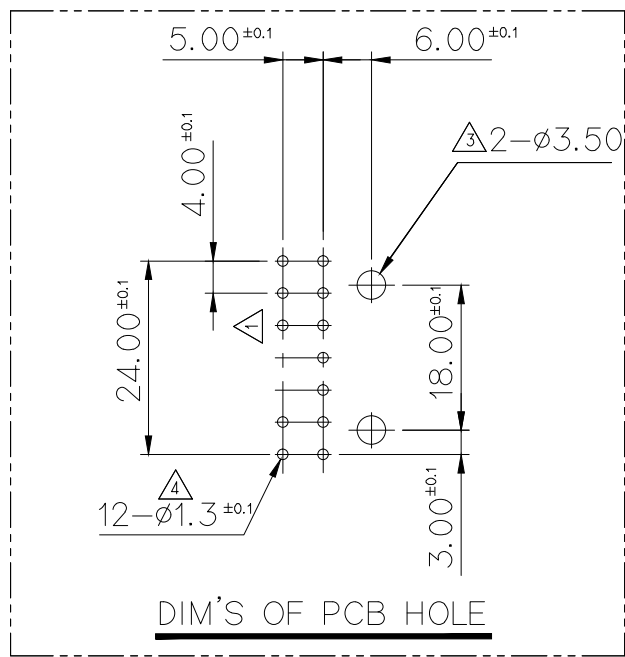
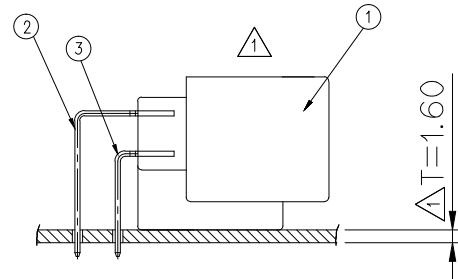
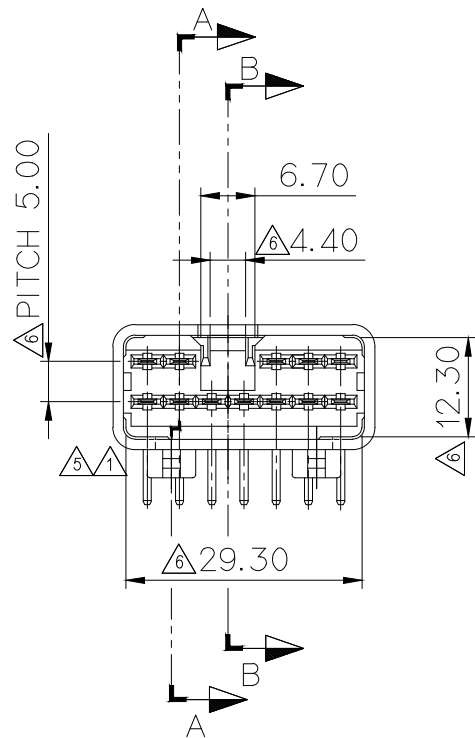
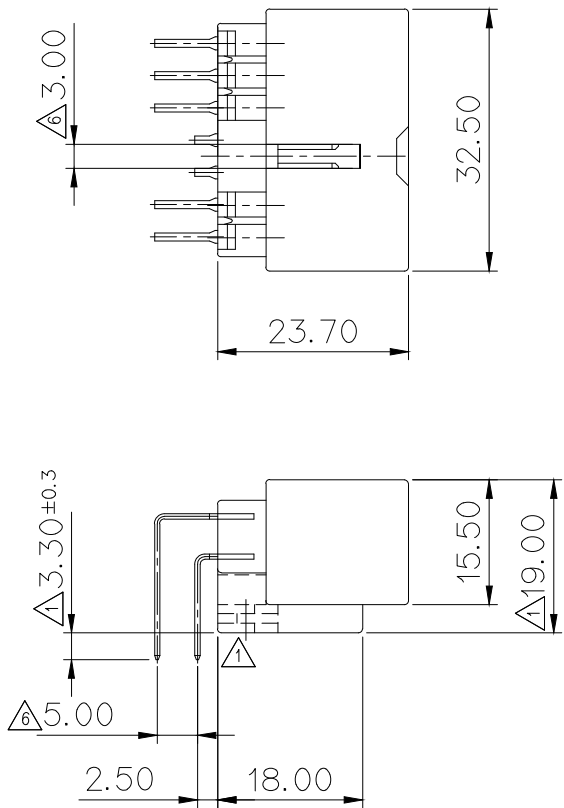


GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

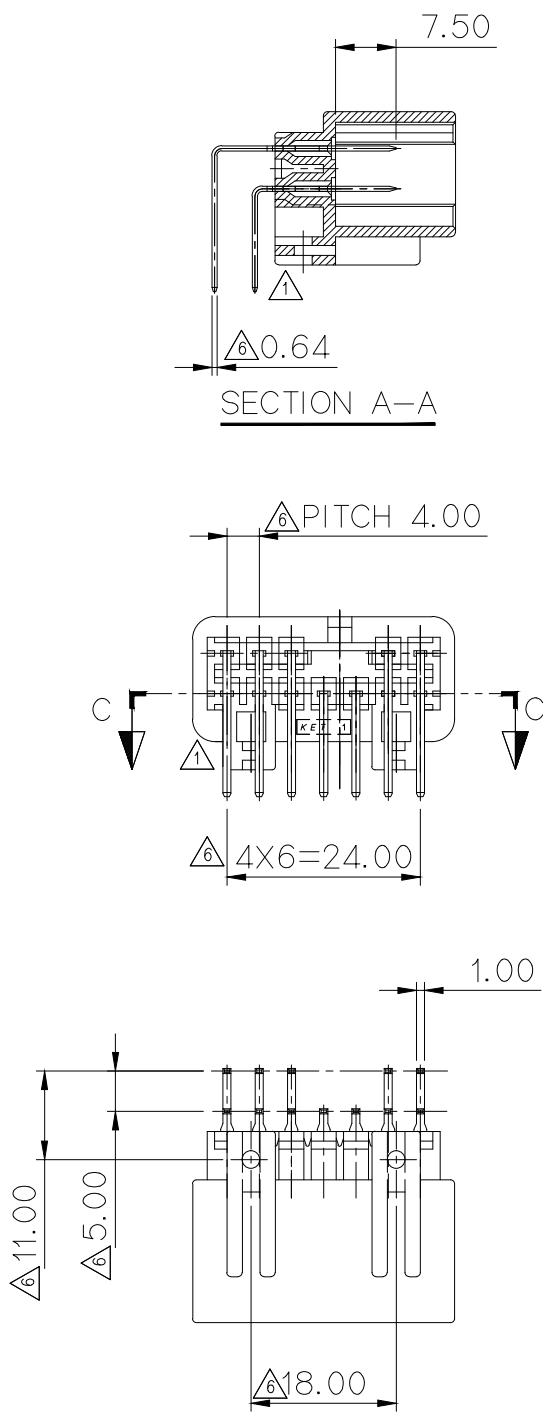

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING :MG651965
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.5로 한다
- 지시하지 않은 모따기 C는 0.5로 한다.
- 기능상 유해한 FLASH, SINK, 미성형등이 없을 것.
- 적용 HS'G : MG651965
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	PART NAME	MATERIAL	Q'TY		FINISH
			642466	644011	
1	090II PCB 12P HS'G(HZT)	PBT	1	1	NATURAL
2	PCB TAB TERMINAL (XL)	BRASS	5	4	PRE-TIN
3	PCB TAB TERMINAL (M)	BRASS	7	6	PRE-TIN

TERMINAL 위치

품 명	품 번	TM'L 위치(표시)	P.C.B. LAYOUT
090II 12M PCB ASSY (HZT)	MG642466		
090II 12M PCB ASSY (HZT 10P)	MG644011		

ECO-1409-174	근거 도면 재작성	LJY	YSW	BIN	'14.09.24
--------------	-----------	-----	-----	-----	-----------

3	ECO-1405-194 근거 도면 재작성	KJY	JBS	BOI	'14.05.29.	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
4	ECO-1206-067 근거 도면 재작성	JDR	4/9	4/9	12.06.15.	FINISH	SEE TABLE		
3	설/변(ECO-1105-313)오기 수정	LSY	4/9	4/9	'11.05.23.	WIRE RANGE			
2	설계사양변경(S070204)근거 수정	PSH	4/9	4/9	'07.09.13.	INSULATION			
1	BRACKET 호환성 개선(재작성)	SHIN	KO	4/9	'02.05.17.				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG642466, MG644011
DR. INO. 01.05.23		CHK. KO. 01.05.23				PART NAME 090 II PCB 12P ASS'Y(HZT TYPE)			
CHK.		APP. CHOSM 05.23							

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 3

ISSUE MARK