

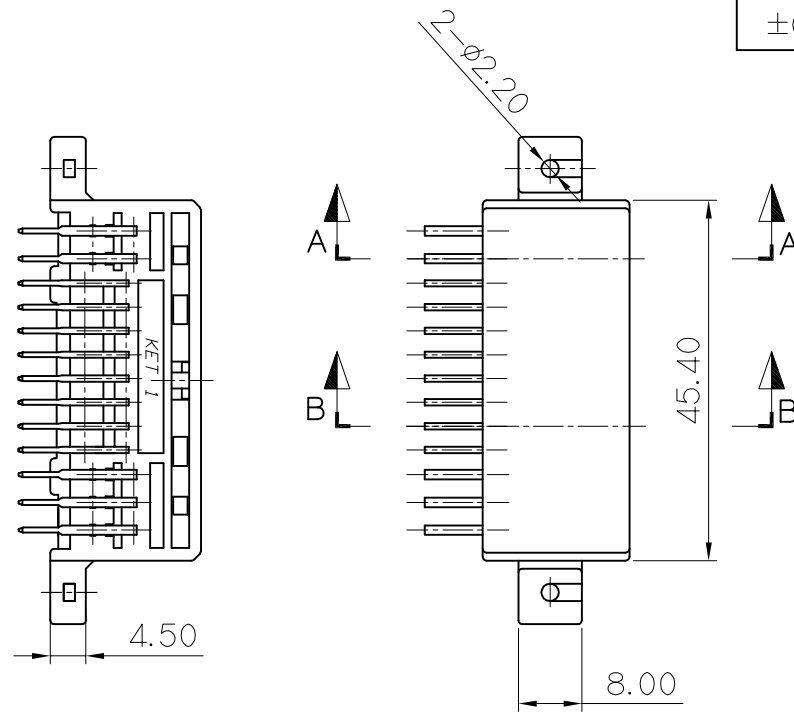
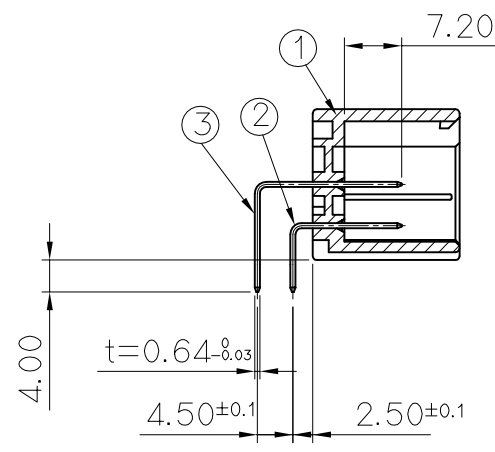
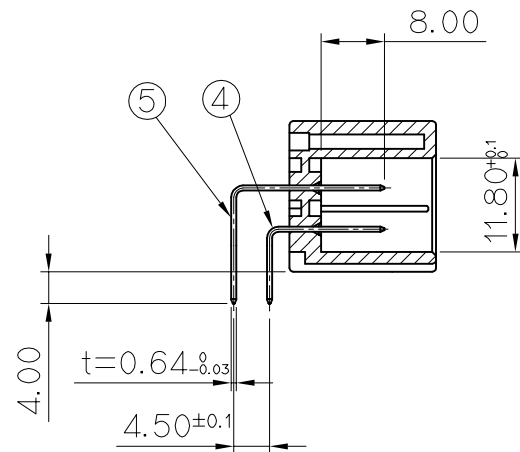
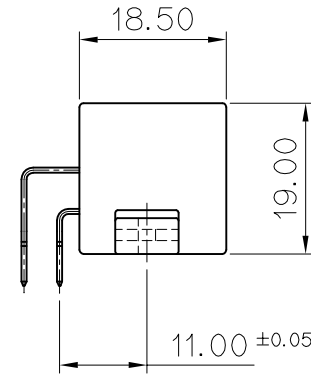
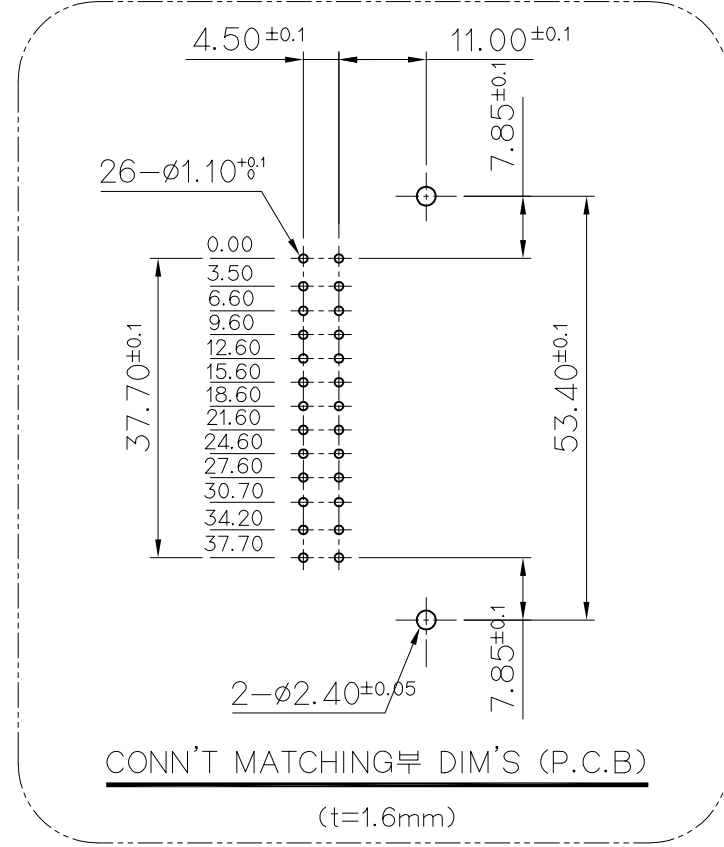


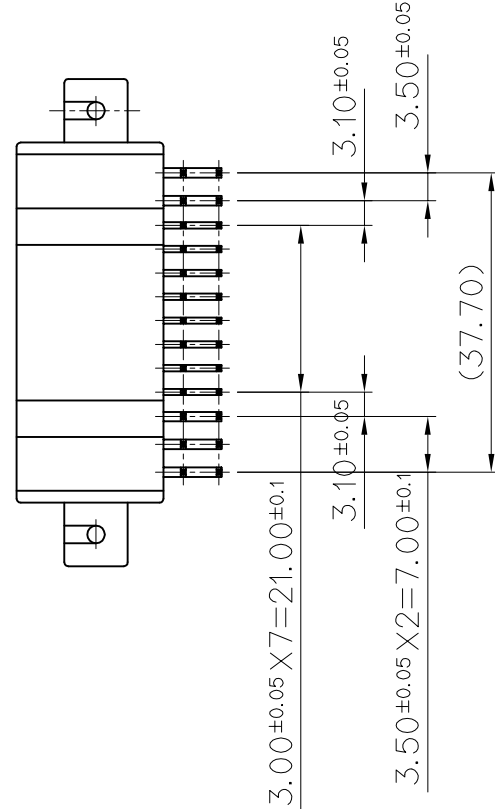

GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

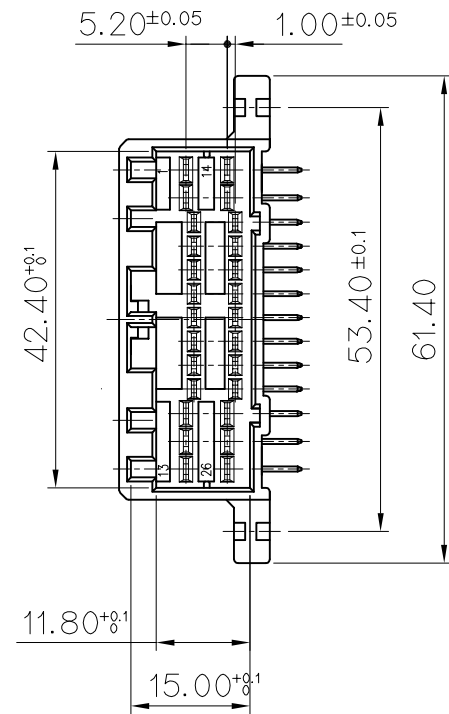

- NOTE
- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
 - UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
 - MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE HOUSING :MG611336
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,PBBs,PBDEs,HEXAVALENT CHROMIUM) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

부품 구성표

SECTION A-A

SECTION B-B

MG642505 (PRE-TIN)	⑤	070 TAB TM'L(SM)	BRASS	PRE - TIN	5 EA
	④	070 TAB TM'L(SS)	BRASS	PRE - TIN	5 EA
	③	040 II TAB TM'L(SM)	BRASS	PRE - TIN	8 EA
	②	040 II TAB TM'L(SS)	BRASS	PRE - TIN	8 EA
	①	0407 26P PCB REC. HS'G	PBT	NATURAL	1 EA
MG642505-5 △(Sn TINED)	⑤	070 TAB TM'L(SM)	BRASS	△ Sn TINED	5 EA
	④	070 TAB TM'L(SS)	BRASS	△ Sn TINED	5 EA
	③	040 II TAB TM'L(SM)	BRASS	△ Sn TINED	8 EA
	②	040 II TAB TM'L(SS)	BRASS	△ Sn TINED	8 EA
	①	0407 26P PCB REC. HS'G	PBT	BLACK	1 EA
ASS'Y NO.	NO	PART NAME	MATERIAL	FINISH	Q'TY

- 주 기
- 지시하지 않은 반경 R은 0.5로 한다.
 - 지시하지 않은 모따기 C는 0.5로 한다.
 - 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 적용 PLUG HS'G : MG611336
 - 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV지침 및 RoHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH SEE TABLE			
	설계사양변경(S080258)근거 수정 (Pb 도금 삭제)	CDH		'08.10.30	WIRE RANGE			CLASS
					INSULATION			TYPE
	Sn→Pb후도금사양 추가	SHIN	KO	'03.09.23				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG642505
DR. INO. 01.05.23		CHK. KO. 01.05.23			PART NAME			
CHK.		APP. H:\S080258\app_01.05.23			5/24 0407 26P PCB CONN'T(HZT — SCREW)			