
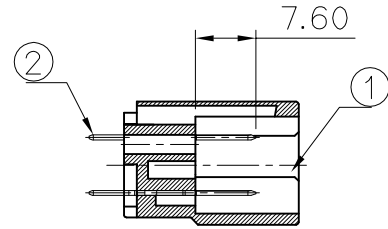
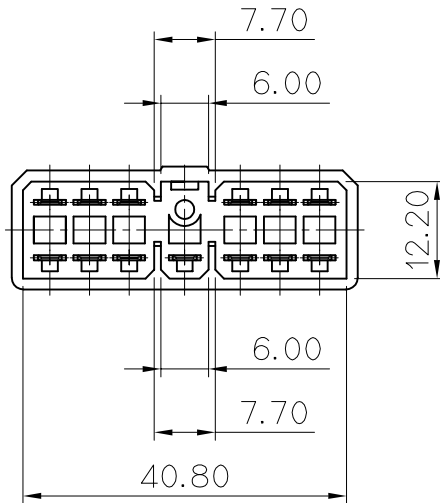
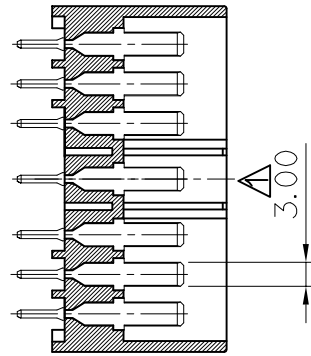
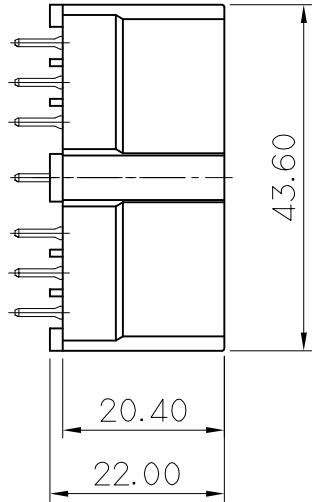
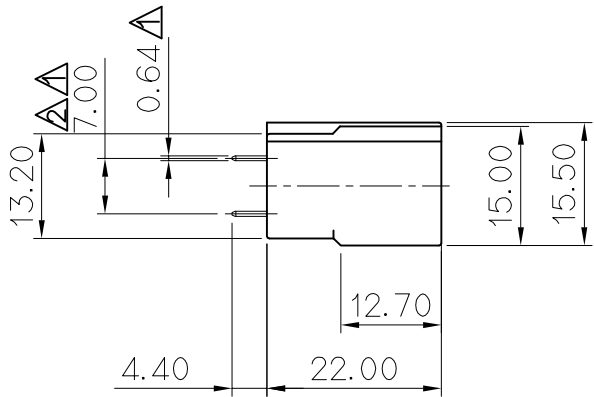
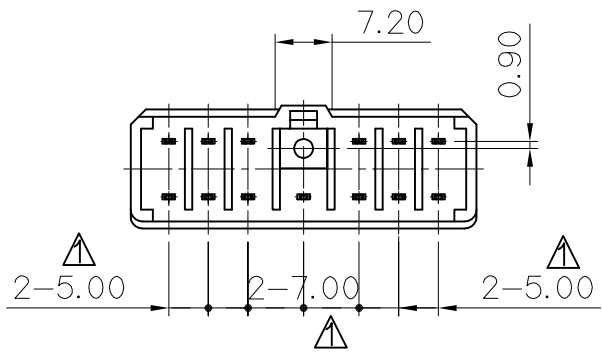


GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

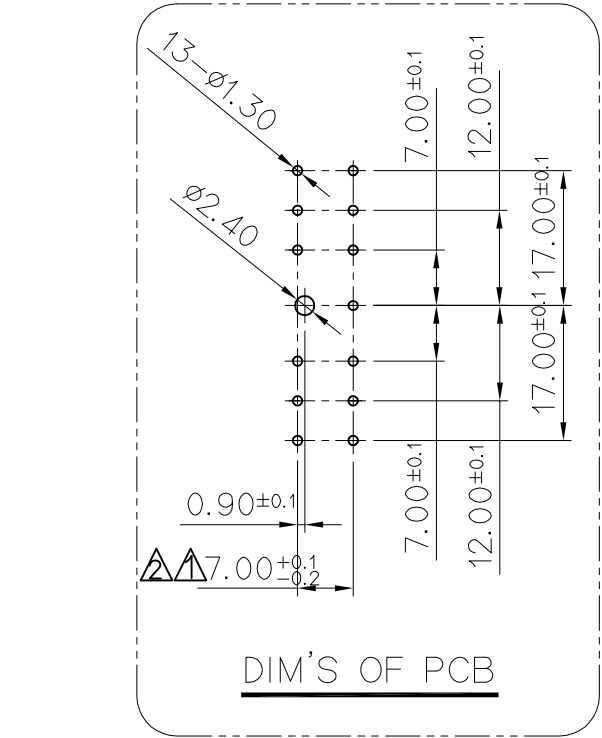

NO.	PART NAME	MATERIAL	Q'TY	FINISH
1	PA PCB 13P HS'G	PA66	1	NATURAL
2	PA PCB TAB TERMINAL	BRASS	5	PRE-TIN

주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.지시하지 않은 모따기 C는 0.5으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
4. 적용 PLUG HS'G : 7119-3130(YAZAKI)

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE PLUG HS'G : 7119-3130(YAZAKI)



ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE		
	조립성 개선	SHIN			02.09.17	WIRE RANGE			CLASS	
	조립성 개선, 상디물 제거, 불필요 공차 정리	SHIN			02.07.23	INSULATION			TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG642517
DR. INO. 01.12.14.		CHK.				PART NAME				
CHK.		APP.				PA PCB 13P ASS'Y				
		H:\SHEET\300\Wip-2.DWG				3/6				