
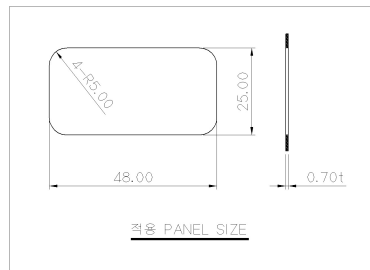


NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG672569	DOOR 16M HOUSING	PBT	NATURAL
2	MG671005	1809 16P REC. SPACER		NATURAL

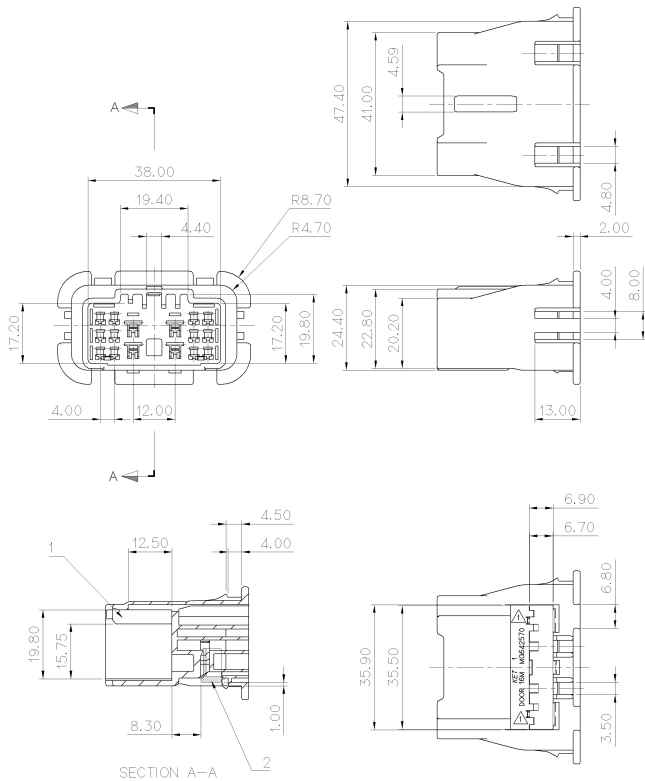

NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST740631, 632, 633(187II)
APPLICABLE TERMINAL: ST740672, 673, 674(090II)
APPLICABLE HOUSING: MG651882
- HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없었음.
- 적용 TERMINAL: ST740631, 632, 633(187II)
적용 TERMINAL: ST740672, 673, 674(090II)
적용 HOUSING: MG651882
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안됩니다.

ISSUE MARK

				GENERAL TOLERANCE (HOUSING)		USED ON
				10MAX	20MAX	45MAX
				±0.2	±0.25	±0.3
				ANGLE	ECCENT	
				±30'	0.1	
				SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
				NATURAL		
				WIRE RANGE		CLASS 090 II + 187 II
				INSULATION		TYPE
				TOLERANCE AS SHOWN		SCALE 1/1
				REVISION RECORD		PART NO. MG642570
LTR	DR.	CHK.	APP.	DATE		
	WON.			10/23		
				PART NAME		DOOR 16M ASSEMBLY
				TOLERANCE AS SHOWN		