

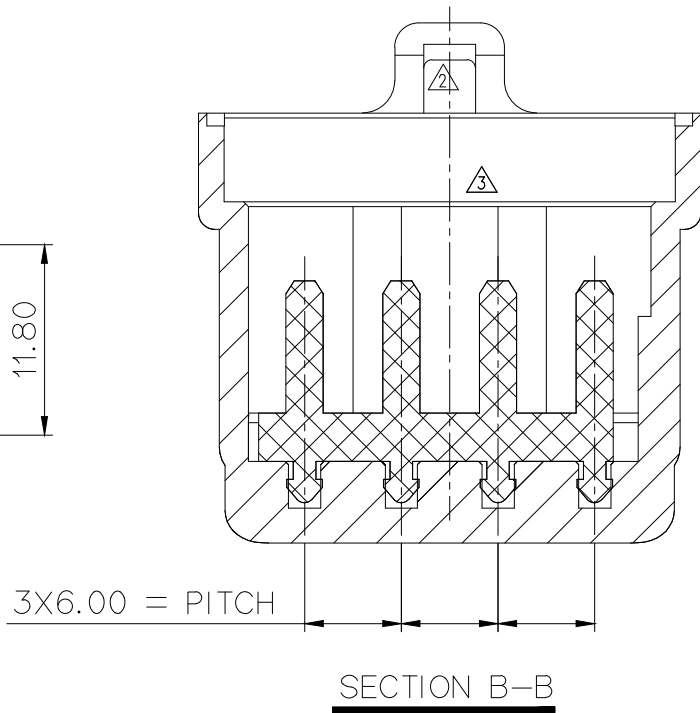
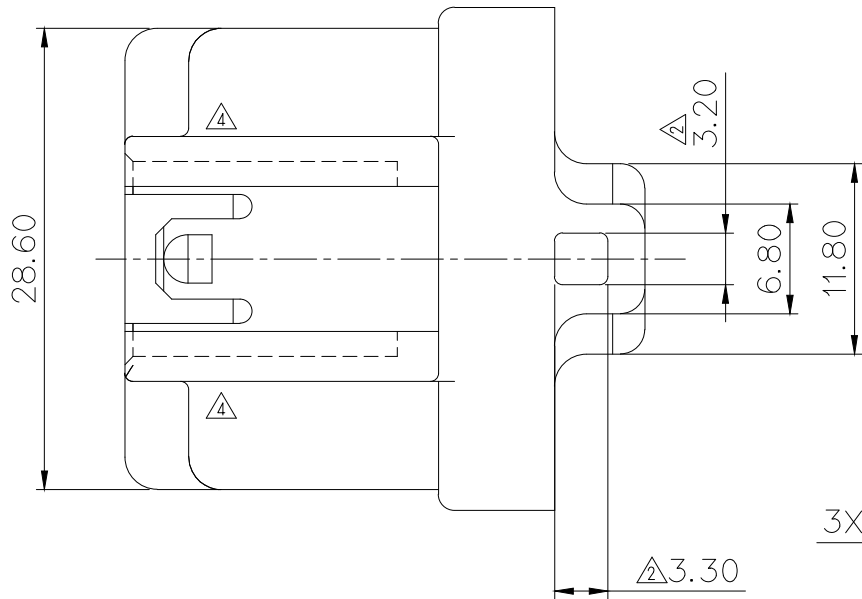
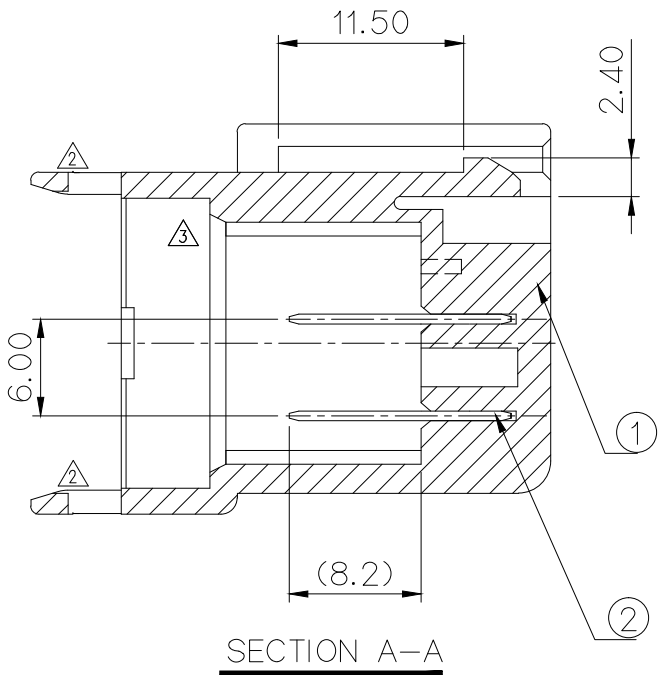
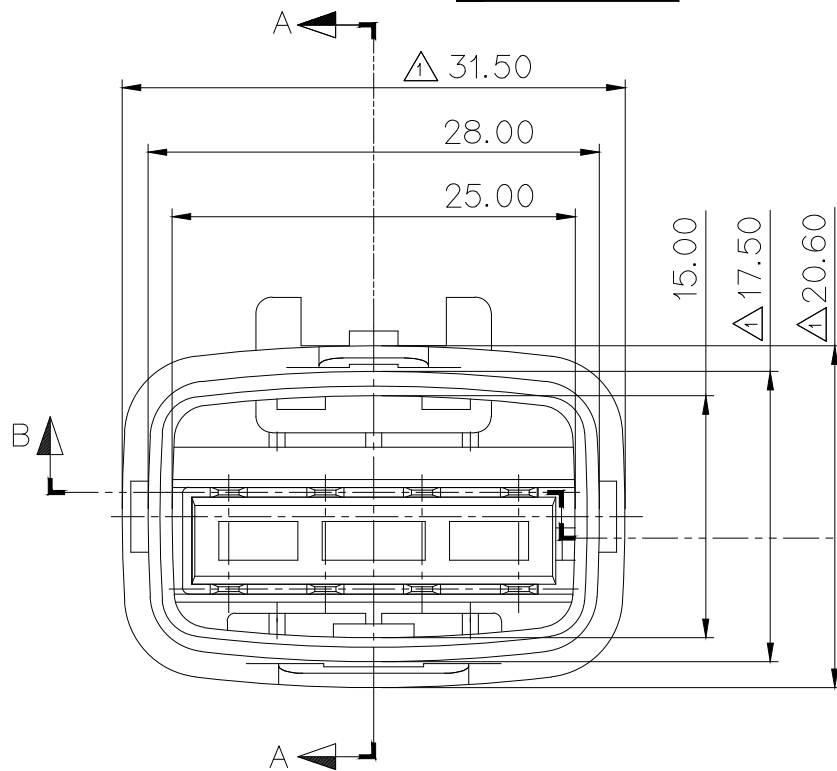


②	△ST791419-3 (P901419)	ASC WP JOINT 8P TAB TM'L	BRASS	PRE-TIN
①	MG672590	ASC WP JOINT 8M HS'G	△SEE TABLE	△SEE TABLE
NO.	PART NO.	PART NAME	MATERIAL	FINISH

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

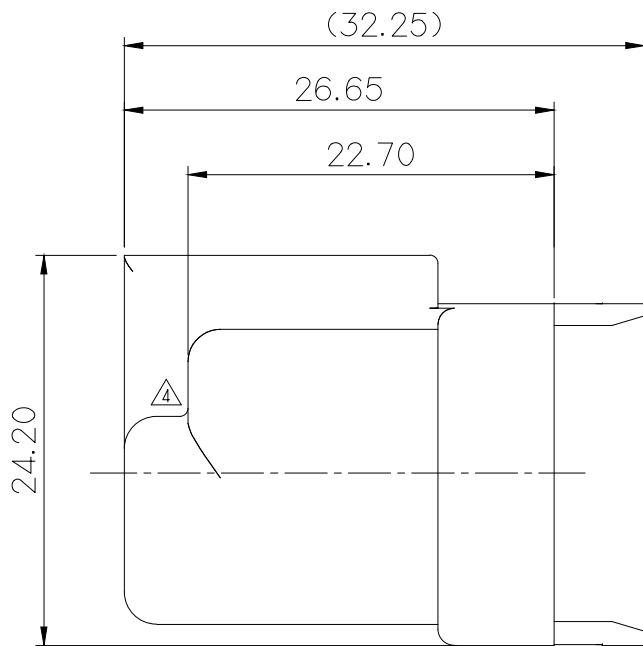

△NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

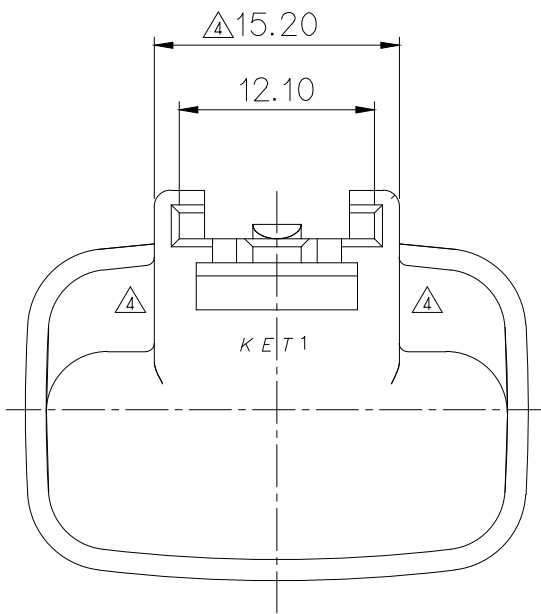

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.상대 CONNECTOR: MG652584
- △ 3.제품내 함유된 6대 유해물질(납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR : MG652584
- △ 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

△5	ECO-2109-074 근거 도면 재작성	CTI	KSC	HYJ	'21.09.13
△4	ECO-1501-337 근거 도면 재작성 (CLIP 가이드 강도보강)	KCS	HYJ	LSY	'15.01.26
△3	ECO-1212-096에 근거 도면 재작성	YM.K	CSH	HSH	'12.12.12
△2	설계사양변경(S060211)근거 도면 재작성 (LOCK부 형상변경)	LDG	HSH	KKJ	'06.07.21
△1	시방변경(S040083)의거 도면 재작성	KDJ			'04.07.03
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	LSY. 02.11.19	CHK.			
CHK.		APP.			

MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
FINISH	SEE TABLE	
WIRE RANGE		CLASS .090 II
INSULATION		TYPE
TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG642583
PART NAME	ASC WP JOINT 8M ASS'Y	

APPROVED

2021-10-22

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK