
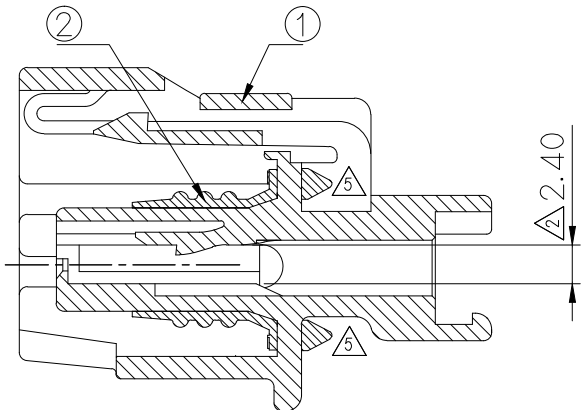
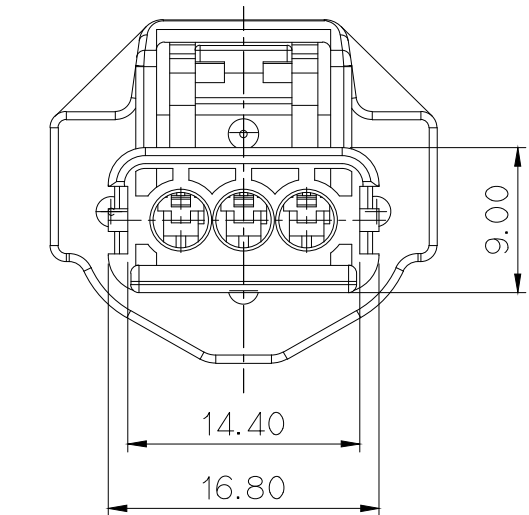
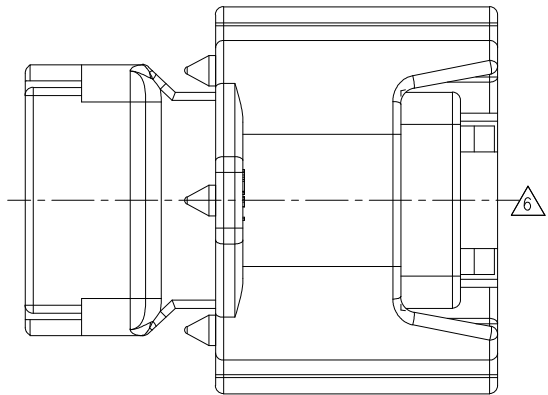
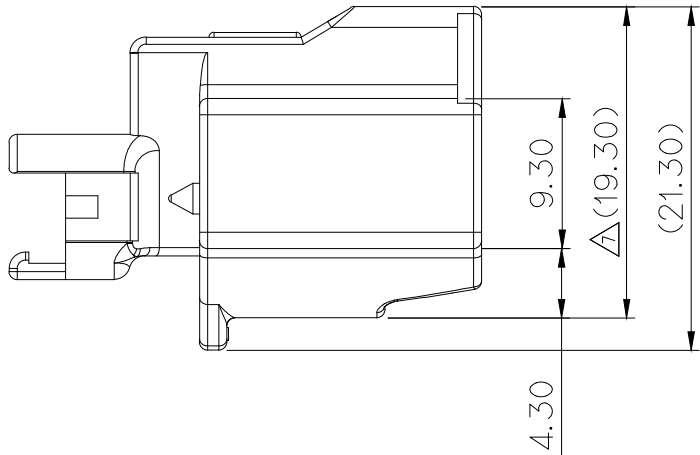


NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

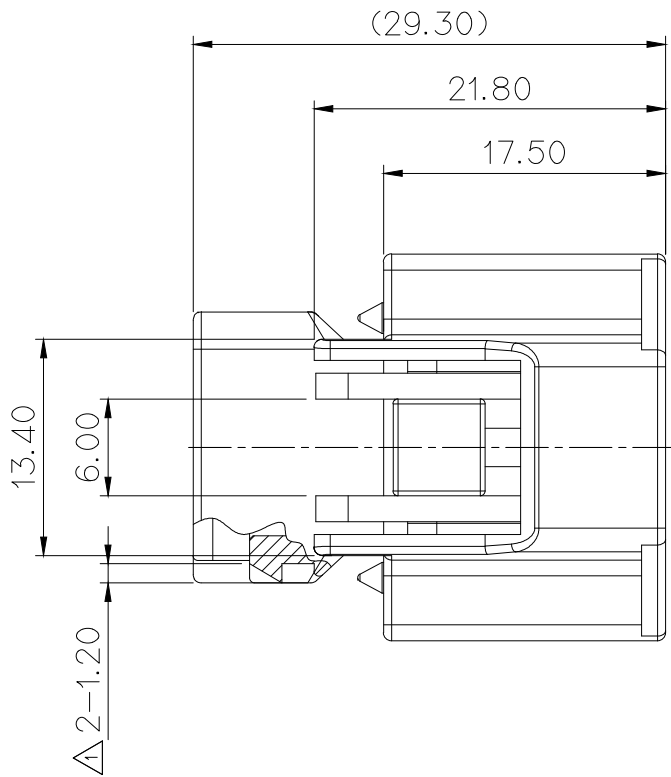

SECTION A-A

NO.	PART NAME	PART NO.	MATERIAL	REMARK
①	RK 3F HOUSING(RK03FB)	MG672604	SEE TABLE	SEE TABLE
②	RK 3P INNER SEAL	R600212	SILICONE	RED


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시없는 R은 전부 0.3으로 한다.
- 기능상 유해한 BURR, WELDLINE, 변형 등이 없을 것.
- 적용 TERMINAL : ST730924, ST730925
적용 REAR HOLDER : MG632606
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730924, ST730925
APPLICABLE REAR HOLDER : MG632606
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

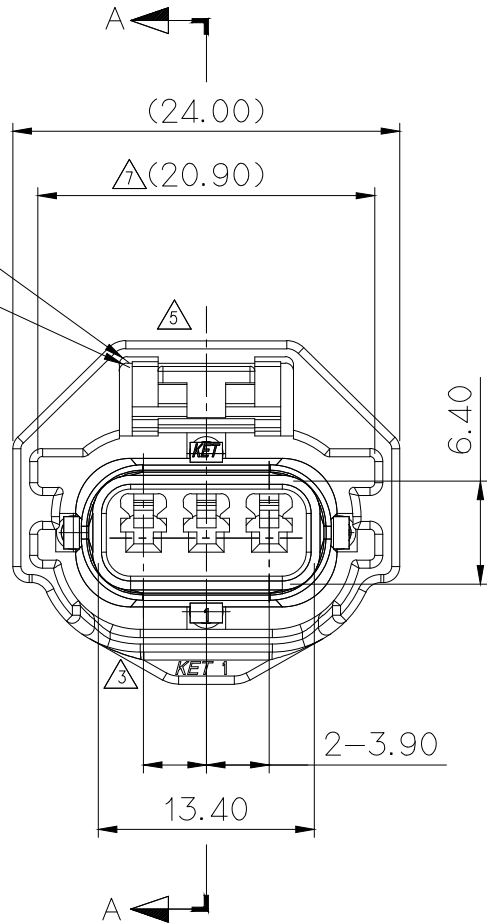

⑦	ECO-2102-014 근거 도면 재작성	SDI	KSC	CJH	'21.02.01
⑥	ECO-1701-477 근거 도면 재작성	SY.L	KMH	LSY	'17.01.24
⑤	ECO-1511-123 근거 도면 재작성 (INNER SEAL 이탈개선)	AJH	CKY	LSY	'15.06.05
④	ECO-1506-103 근거 도면 재작성 (R형상 추가)	YSS	CKY	LSY	'15.06.05
③	ECO-1309-085 근거 도면 재작성	KJH	CSH	CWK	'13.09.12
②	설계사양변경(S070026)근거 도면 재작성 (단자 역삽입 개선위한 형상변경)	KDJ	HSH	KKJ	'07.02.05
①	설계사양변경(S060308)근거 도면 재작성 (LOCK부 형상변경)	KBS	HSH	KKJ	'06.11.23
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	KYM 04.04.21	CHK.			
CHK.	KKJ 04.04.26	APP.	KCH	04.04.26	

MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	SEE TABLE	
WIRE RANGE		
INSULATION		CLASS 91RK (040 WP)
		TYPE 7183-7874-30
TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO. MG642605
SCALE 2/1		
PART NAME	RK 3F ASSY(RK03FB)	



ISSUE MARK