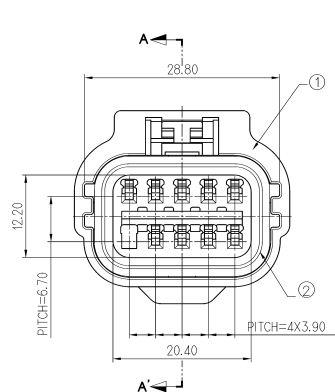



GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주기

- 지시없는 R는 전부0.5으로 한다.
- 기능상 유해한 BURR,변형등이 없을것.
- 적용 부품 : TERMINAL - ST730924/ST730725
R/HOLDER-MG632619

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF BURR,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE PART : TERMINAL-ST730924/ST730925
R/HOLDER-MG632619

NO.	PART NAME	PART NO.	MATERIAL	REMARK
①	RK 10P REC' HS'G(RK10FB)	MG672617	PBT	BLACK
②	RK 10P REC. I/SEAL	P901431	SILICONE	RED



				MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	SEE TABLE	
				WIRE RANGE		CLASS 91RK (040 WP)
				INSULATION		TYPE 7183-7970-30
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO. MG642618
DR.	KYM 04.04.21	CHK.				PART NAME RK 10P REC' ASS'Y(RK10FB)
CHK.	04.26	APP.		04.26		