
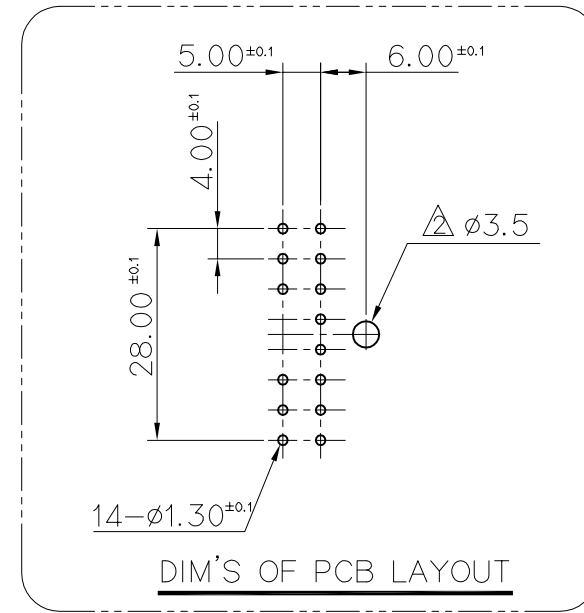
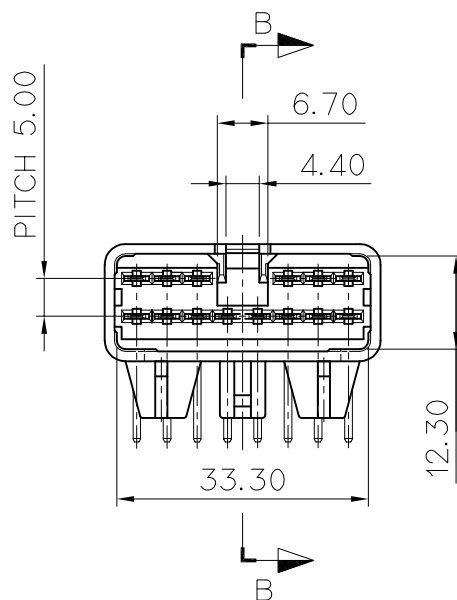
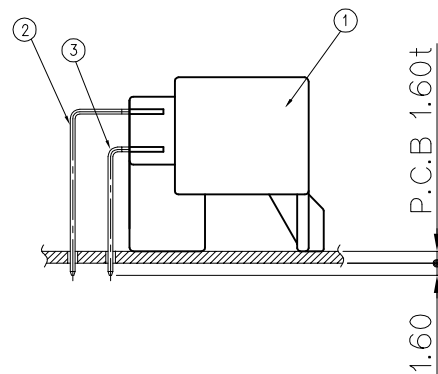
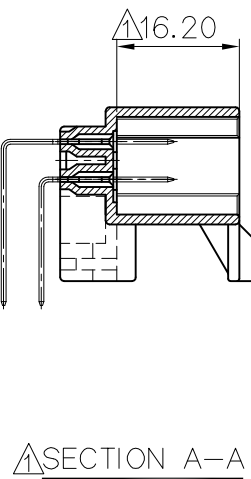
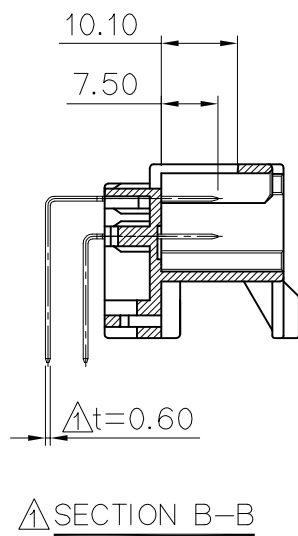
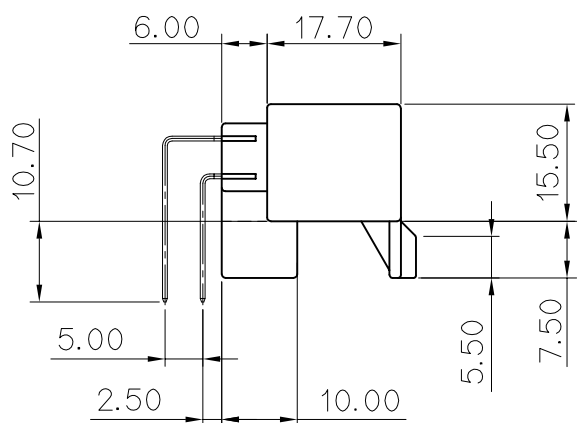
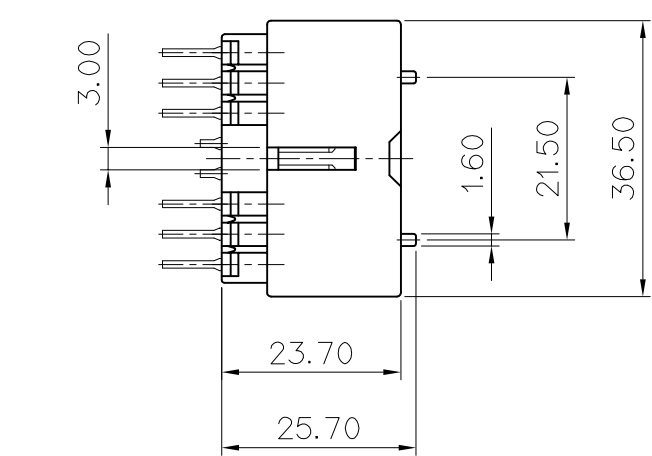


GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

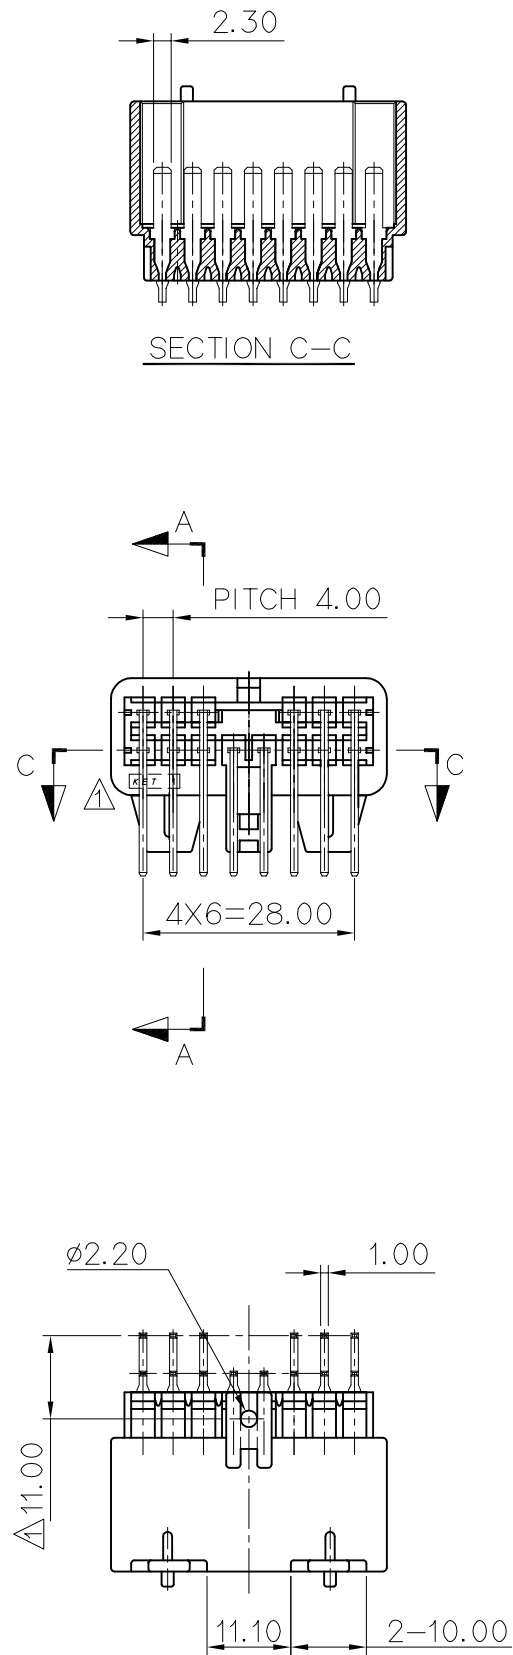

주 기

- 1.지시없는 반경 R은 0.5로 한다.
- 2.지시없는 모따기 C는 0.5로 한다.
- 3.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 4.적용 HOUSING : MG651110

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING : MG651110

NO.	PART NAME	MATERIAL	Q'TY	FINISH
1	090 II PCB 14P REC' HS'G(HZT)	PBT	1	NATURAL
2	090 II PCB TAB TERMINAL (XL)	BRASS	6	PRE-TIN
3	090 II PCB TAB TERMINAL (M)	BRASS	8	PRE-TIN

ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE	CLASS .090 II	
	설/변(ECO-1105-313)도면 오기 수정	LSY			'11.05.23		
	CONNECTOR 삽입, 이탈성능 개선	SHIN	WK		'02.11.27	INSULATION	TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.	SHIN. 02.08.16	CHK.	WK	CHOI.	8/17	SEE TABLE	PART NO. MG642666
CHK.		APP.			8/17	PART NAME .090 II PCB 14P ASS'Y(HZT TYPE)	