
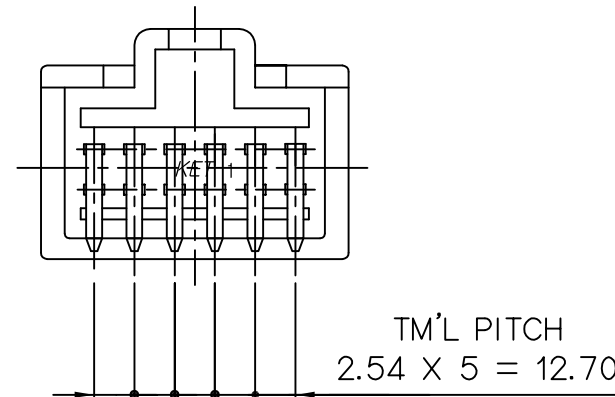
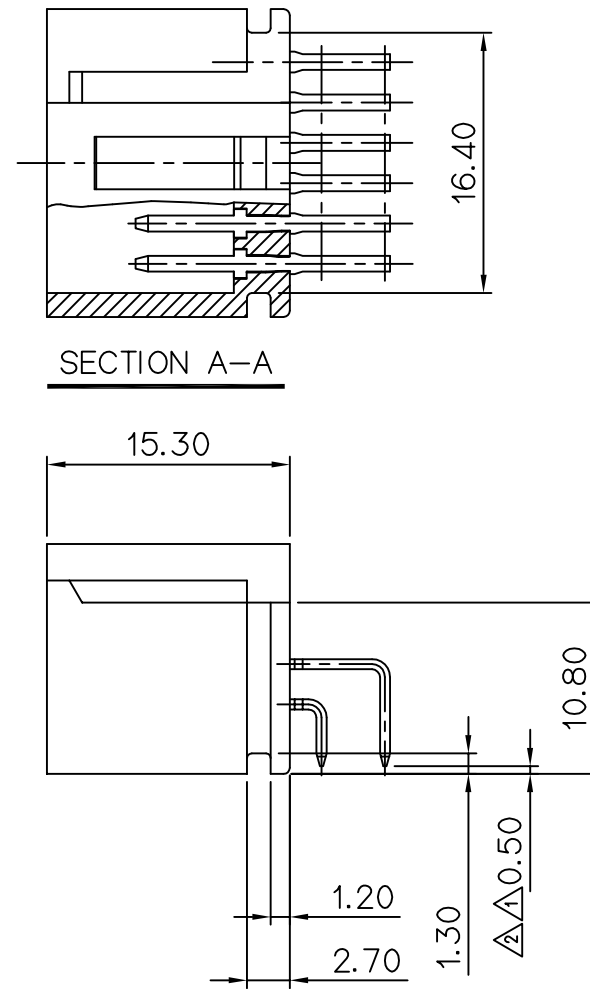
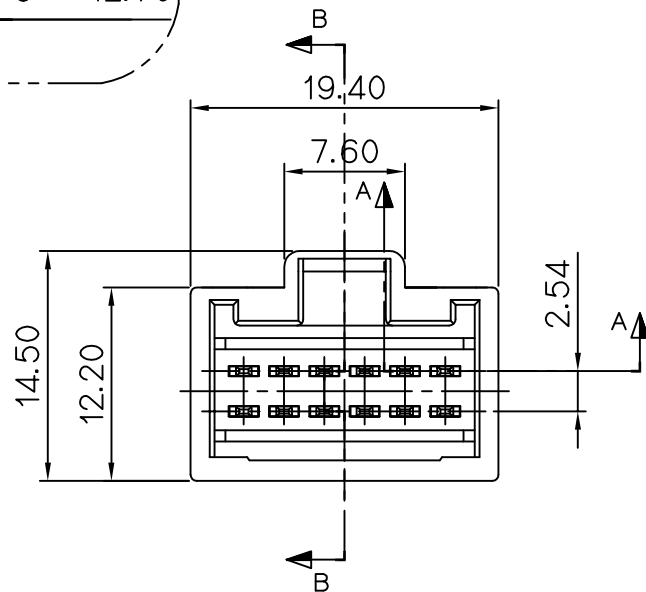


GENERAL TOLERANCE (TERMINAL)								GENERAL TOLERANCE (HOUSING)								USED ON
1 MAX	5 MAX	10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.1	±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

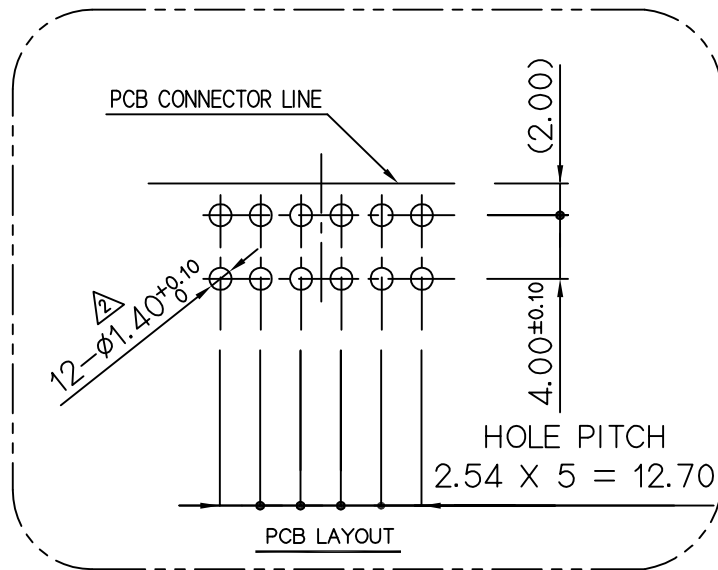

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.4 RADIUS
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING PLUG HOUSING : MG610376

NOTE

- 지시하지 않은 반경 R은 0.4로 한다
- 기능상 유해한 BURR등 변형이 없을것.
- 적용 PLUG HOUSING : MG610376

제품구분

NO.	PART NAME	MATERIAL	8P		10P		12P	
			FINISH	Q'TY	FINISH	Q'TY	FINISH	Q'TY
①	SP 12M PCB HOUSING (Hzt)	PBT	NATURAL	1EA	BLACK	1EA	BLACK	1EA
②	SP PCB TAB TERMINAL (SS)	BRASS	PRE-TIN	4EA	PRE-TIN	5EA	PRE-TIN	6EA
③	SP PCB TAB TERMINAL (LS)		PRE-TIN	4EA	PRE-TIN	5EA	PRE-TIN	6EA

품 명	품 번	TM'L위치(■표시)	P.C.B. LAYOUT	FINISH		Q'TY
SP 12M PCB CONN'T ASSY (Hzt-8p type)	MG642870			HS'G	NATURAL	1 EA
				TM'L	PRE-TIN	8 EA
SP 12M PCB CONN'T ASSY (Hzt-10p type)	MG643587-5			HS'G	BLACK	1 EA
				TM'L	PRE-TIN	10 EA
SP 12M PCB ASSY (HZZ)	MG643684-5			HS'G	BLACK	1 EA
				TM'L	PRE-TIN	12 EA

		S.H.PARK S.W.HWANG	K.J.KIM		MATERIAL	SEE TABLE	IKIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.	
④	12P사양(MG643684) 추가			'05.07.08	FINISH	SEE TABLE		
③	10P사양(MG643587) 추가	SHIN K.J.KIM	C.H.KIM	'04.01.05.	WIRE RANGE		CLASS	SP(040)
②	고객 요청에 의한 적용 TM'L 변경	SHIN		'03.05.20.	INSULATION		TYPE	
①	치수기입오기수정	SHIN		'02.10.04.				
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG642870,3587,3684
DR. SHIN. '02.08.02.		CHK. WK. CHOI		8/3	PART NAME			
CHK.		APP.		8/5	SP 12M PCB ASSY (HZZ-8P,10P,12P Type)			



ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS SP(040)

TYPE

PART NO.
MG642870,3587,3684

SP 12M PCB ASSY (HZZ-8P,10P,12P Type)