

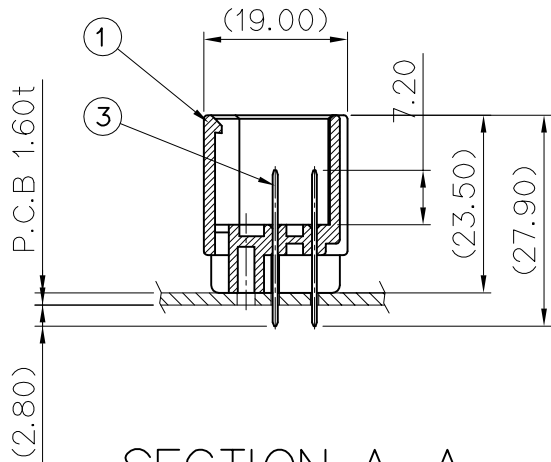
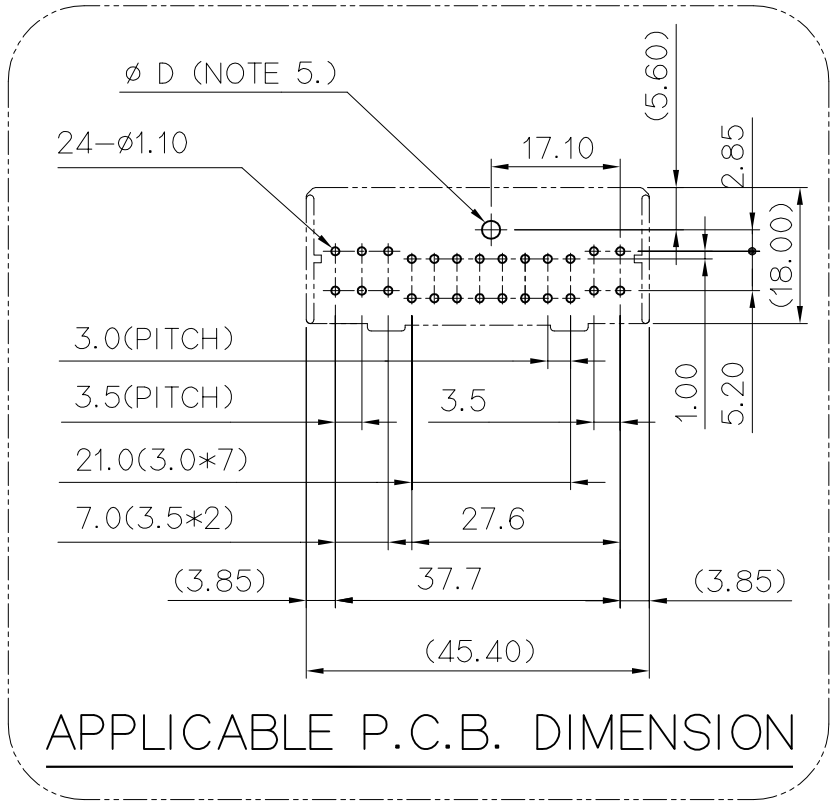
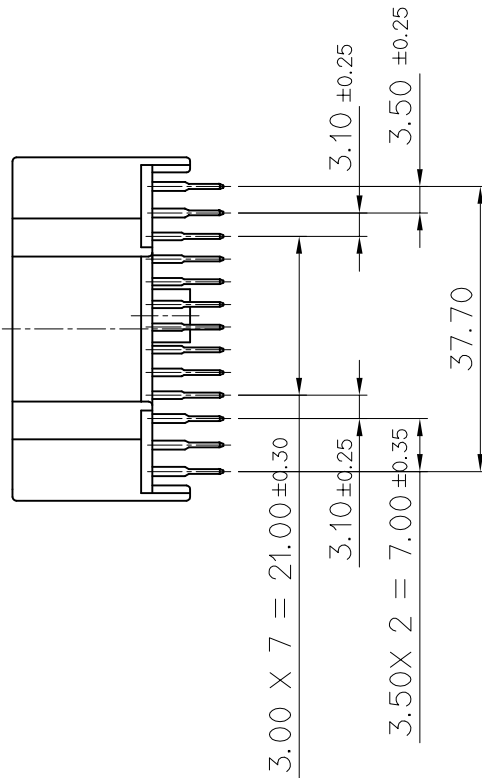
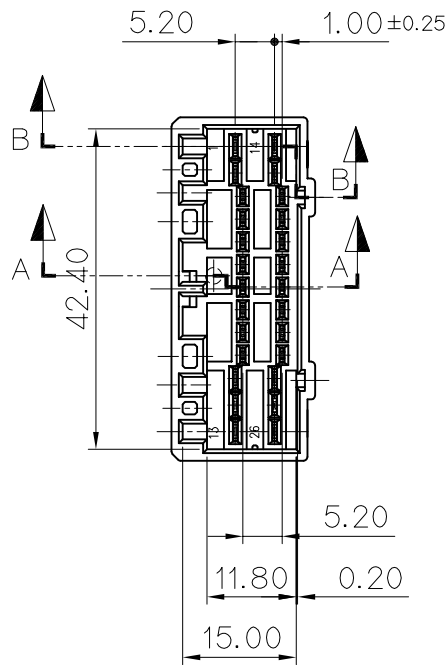
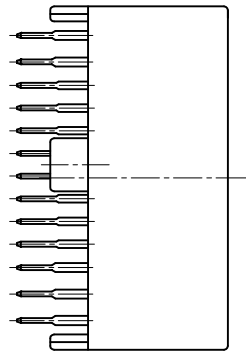


GENERAL TOLERANCE (TERMINAL)								GENERAL TOLERANCE (HOUSING)							USED ON
1 MAX	5 MAX	10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.1	±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

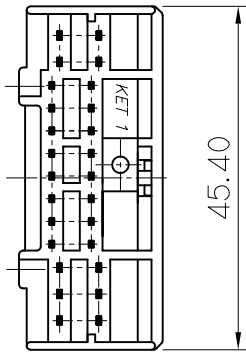

SECTION A-A

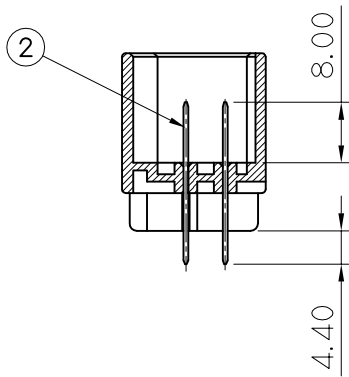

SECTION B-B

NOTE

- 지시하지 않은 반경 R은 0.5로 한다
- 기능상 유해한 BURR등 변형이 없을것.
- 적용 PLUG HOUSING : MG611336
- 적용 SCREW : M2.5 ~ M3 일반나사
- SCREW HOLE 직경 : $\phi D = \text{적용 SCREW} + 0.5$

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING PLUG HOUSING : MG611336
- APPLICABLE MOUNTING SCREW : M2.5~M3 SCREW
- SCREW HOLE DIAMETER : $\phi D = \text{APPLICABLE MOUNTING SCREW} + 0.5$

NO	PART NAME	MATERIAL	FINSH	Q'TY
1	0407 26P REC HS'G (VRT)	PBT+ GF15%	NATURAL	1 EA
2	070II TAB TM'L (VRT)	BRASS	PRE-TIN	10 EA
3	040II TAB TM'L (VRT)	BRASS	PRE-TIN	16 EA

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		HYBRIDE(0407)
					INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR. SHIN. '02.12.23.			CHK.KO. '02.12.23.				SEE TABLE	1/1	MG642924
CHK.			APP.		PART NAME				
					0407 PCB 26P CONN'T ASS'Y (VRT)				

ISSUE MARK