
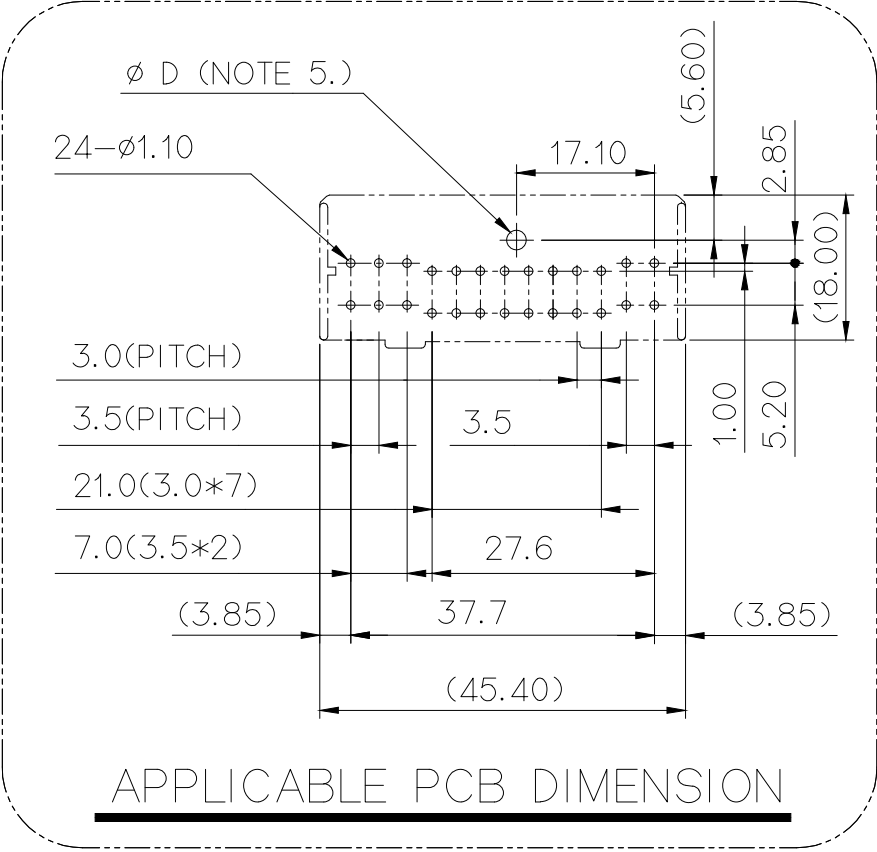


GENERAL TOLERANCE (TERMINAL)								GENERAL TOLERANCE (HOUSING)								USED ON
1 MAX	5 MAX	10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.1	±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

NO.	MATERIAL	COLOR
* 0	PBT+GF15%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
* 6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE


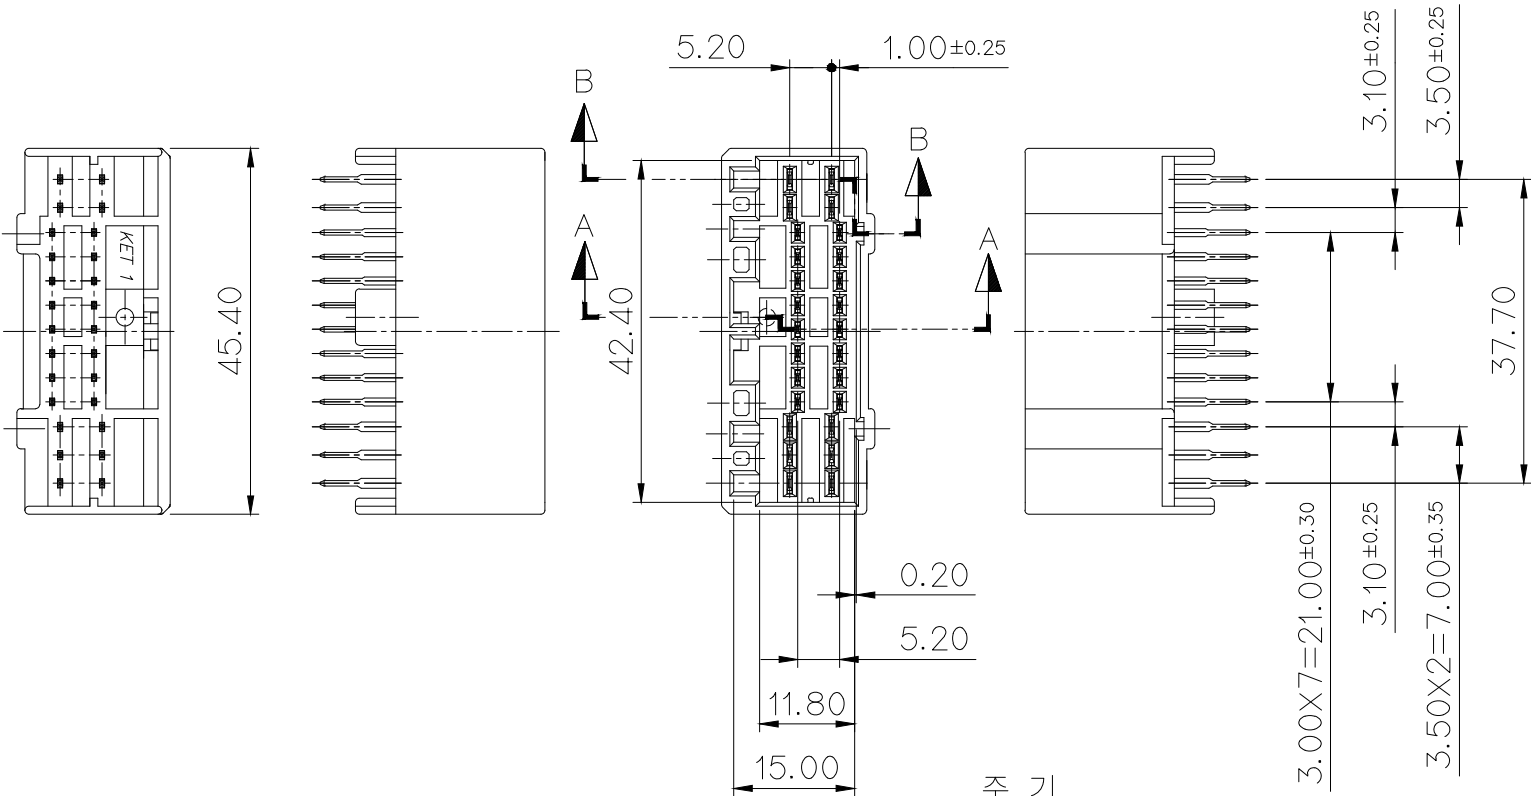


주 기

- 지시하지 않은 반경 R은 0.5로 한다
- 기능상 유해한 BURR등 변형이 없을것.
- 적용 PLUG HOUSING : MG611336
- 적용 SCREW : M2.5 ~ M3 일반나사
- SCREW HOLE 직경 : $\phi D = \text{적용 SCREW} + 0.5$
- △6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING PLUG HOUSING : MG611336
- APPLICABLE MOUNTING SCREW : M2.5~M3 SCREW
- SCREW HOLE DIAMETER : $\phi D = \text{APPLICABLE MOUNTING SCREW} + 0.5$
- △6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

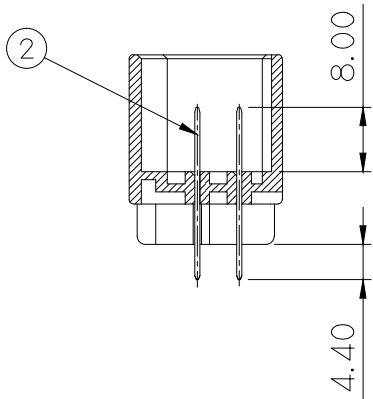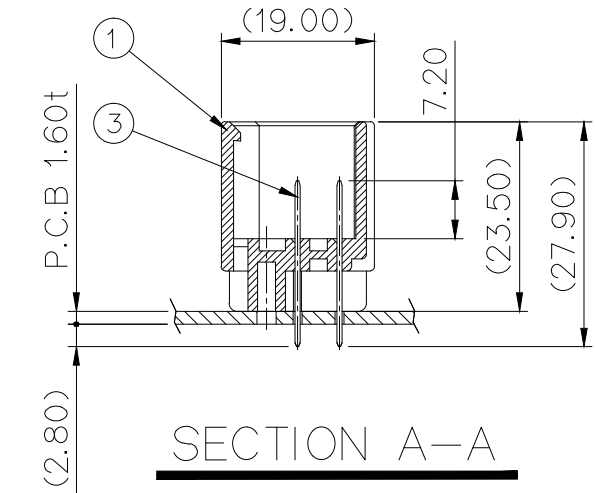

NO.	PART NAME	PART NO.	MATERIAL	FINSH	Q'TY
1	0407 26M PCB HS'G (VRT)	MG672923	△SEE TABLE	△SEE TABLE	1 EA
2	070Ⅱ MALE TM'L (VRT)	ST791241-3	BRASS	PRE-TIN	10 EA
3	040Ⅱ MALE TM'L (VRT)	ST791240-3	BRASS	PRE-TIN	16 EA

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		SEE TABLE			
						WIRE RANGE		CLASS		HYBRIDE(0407)	
						INSULATION		TYPE			
	ECO-1207-130의거 도면 재작성	JDR			'12.07.23.	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.	MG642924
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				1/1		
DR. SHIN. '02.12.23.		CHK. KO. '02.12.23.				PART NAME					
CHK.		APP. 		12/23		0407 26M PCB ASSY (VRT)					

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK