


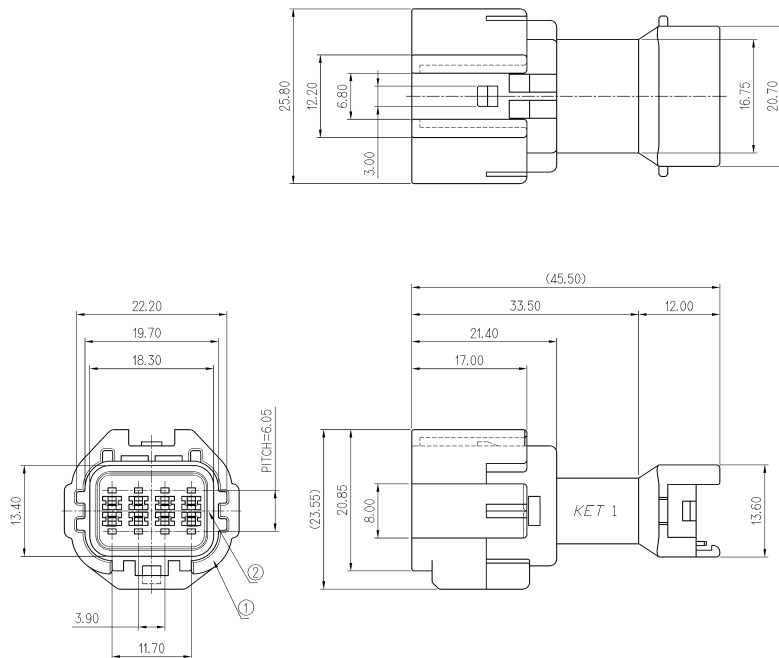


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 지시없는 R는 전부0.3으로 한다.
2. 기능상 유해한 BURR, 변형등이 없을것.
3. 적용 부품 : TERMINAL-ST740926/ST740927
R/HOLDER-MG633096

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE PART : TERMINAL-ST740926/ST740927
R/HOLDER-MG633096



ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	REMARK
①	RK 8P REC' HS'G(RK08MGY)	MG673094	PBT	GRAY
②	RK 8P REC. I/SEAL	P901804	SILICONE	RED

				MATERIAL		PBT		 KET KOREA ELECTRIC TERMINAL CO., LTD.					
				FINISH		GRAY							
				WIRE RANGE				CLASS		91RK (040 WP)			
				INSULATION				TYPE		7182-7775-40			
REVISION RECORD				DR	CHK	APP	DATE	TOLERANCE EXCEPT AS NOTED		SCALE 2/1		PART NO. MG643095	
DR. HE0 S.H 04. 1. 16				CHK									
CHK.  01.19				APP			01.19	PART NAME					