


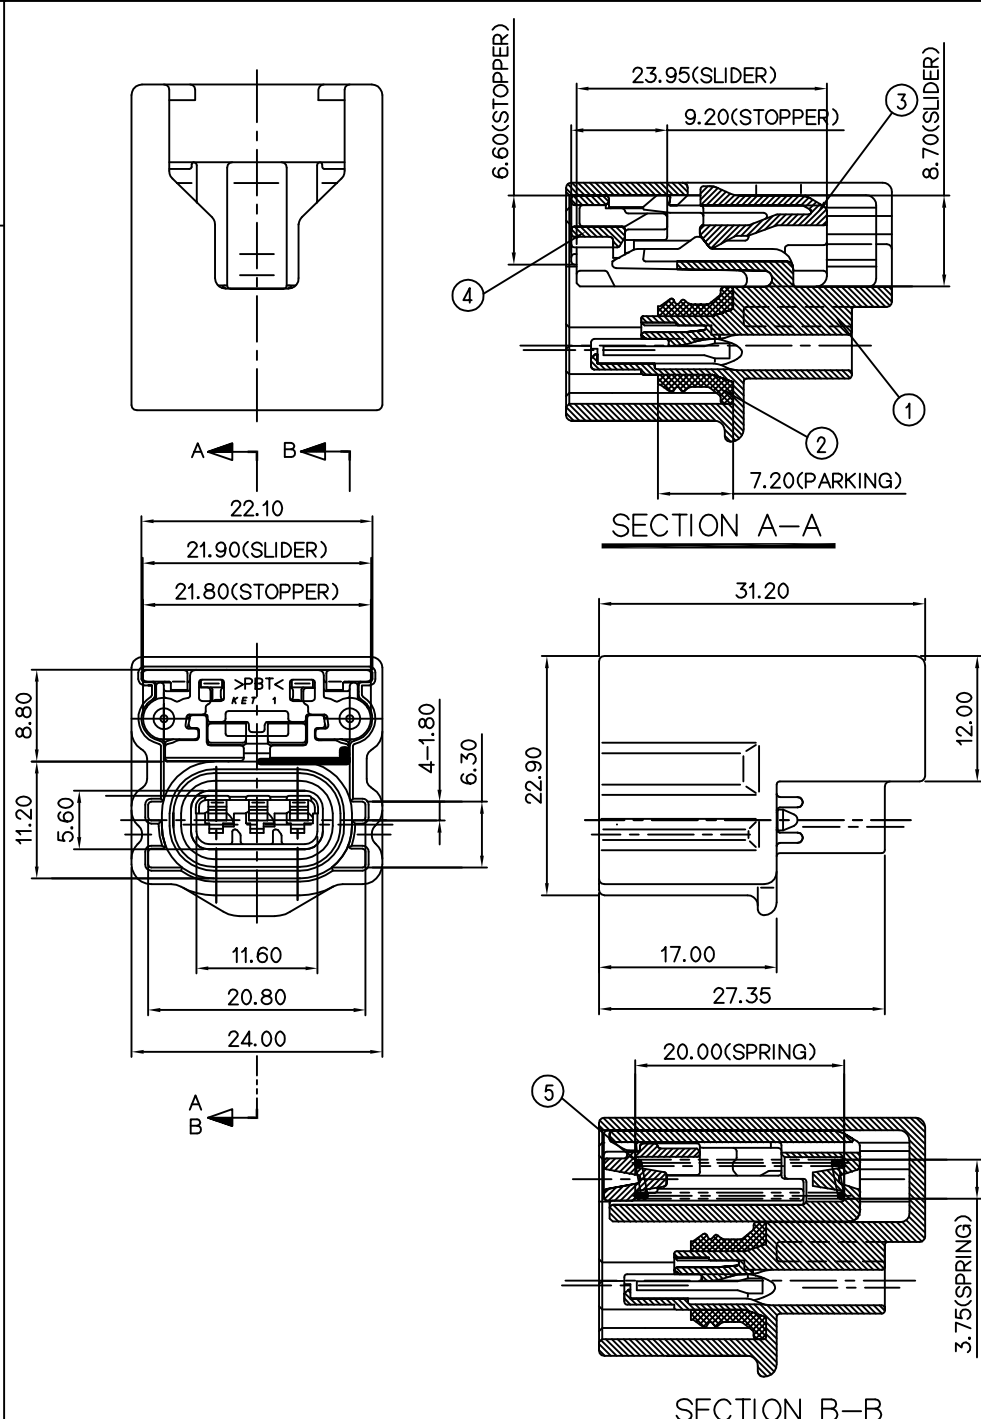

GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

NO.	PART NAME	PART NO.	MATERIAL	REMARK	QTY.
①	RK 3F HOUSING-BD	MG673227	PBT	GREEN	1
②	RK 3P FEMALE HOUSING I/SEAL	R600234	SILICONE	RED	1
③	RK 3F SLIDE HOUSING	MG673224	PBT	GREEN	1
④	RK 3P FEMALE STOPPER HOUSING	MG673225	PBT	GREEN	1
⑤	RK 3F HOUSING COIL SPRING	R600243	SUS304	UNPLATE	2

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 상대물 : X49782-9591(DUMMY)
- 적용 FRONT HOLDER : MG633228
- 적용 TERMINAL : ST730924, 730925
- KET 문자 : 기울기 15° (H; 0.1~0.2, SIZE; 1.0)
CAVITY NO : 기울기 0°(H; 0.1~0.2, SIZE; 1.0)

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- MATCHING PART : X49782-9591(DUMMY)
- APPLICABLE FRONT HOLDER : MG633228
- APPLICABLE TERMINAL : ST730924, 730925
- KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.0)
CAVITY NO : TAPER 0°(H; 0.1~0.2, SIZE; 1.0)

						ISSUE MARK	
						KET KOREA ELECTRIC (ENGINEERED) TERMINAL CO., LTD.	
						CLASS	
						TYPE 7283-7394-60 ETC	
						PART NO. MG643226	
						SCALE 2/1	
						TOLERANCE EXCEPT AS NOTED	
						MATERIAL SEE TABLE	
						FINISH SEE TABLE	
						WIRE RANGE	
						INSULATION	
						PART NAME	
						RK 03FG HOUSING(BD) ASSY	
						CHK. 12/18	
						APP.	
						DR. HEO 2003.12.17	
						CHK.	
						APP.	
						LTR	
						REVISION RECORD	
						DR.	
						CHK.	
						APP.	
						DATE	