


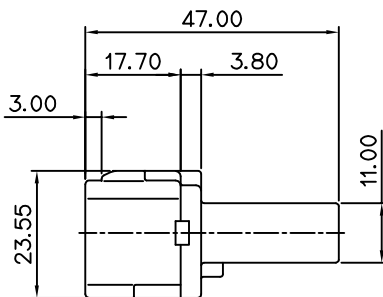


SECTION A-A'

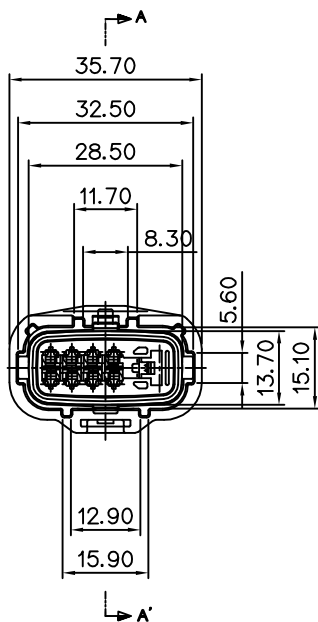

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG613234
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 미성형이 없을것.
2. 적용 TERMINAL NO. : ST730924/ST730925
3. 적용 F/HOLDER. : MG633238

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST730924/ST740925
3. APPLICABLE F/HOLDER : MG633238

NO.	PART NO.	PART NAME	MATERIAL (COLOR)	QTY.
①	MG673237	HYBRID WP 9P MALE HS'G(RK08MGY+X1)	PBT (L/GRAY)	1
②	P901890	HYBRID WP 9P MALE INNER SEAL(RK08MGY+X1)	SILICONE (RED)	1



ISSUE MARK

				MATERIAL SEE TABLE		KET KOREA ELECTRIC TERMINAL CO., LTD.		
				FINISH L/GRAY				
				WIRE RANGE			CLASS	
				INSULATION			TYPE 7182-7397-40	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG643236
DR.	HEO S.H 04.8.23	CHK.						
CHK.		APP.				PART NAME HYBRID WP 9P MALE ASSY(RK08MGY+X1)		