



PART NO. MG643284


CUSTOMER DRAWING

DIMENSIONS IN MM

NO.	PART NO.	PART NAME	MATERIAL	COLOR	QTY.
①	MG673285	RH 6P FEMALE HS'G	PBT	BLACK	1
②	MG673286	RH 6P FEMALE HS'G F/HOLDER	PBT	NATURAL	1
③	P901895	RH 6P FEMALE I/SEAL	SILICONE	RED	1

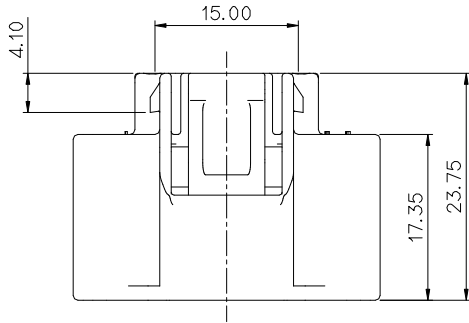

SECTION A-A

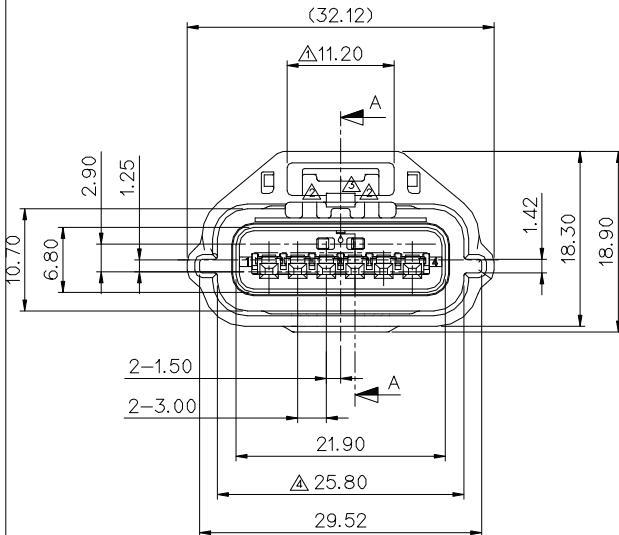


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

~S~ ~!~J


1. ~!~J~!~3~!~P~*~!~5 ~R~2~F~"~3~K~\$ BURR ~"~5~7 ~'~5~*~%~!~5~^3~"~!~5~ ~,~5 ~^,%~!~2~R~3~C~^!~%~!~3.
2. ~^~!~%~!~R~!~P TERMINAL NO. : ST730962/963
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST730962/963
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
	ECO-1308-071 근거 도면 제작성	KJH	CSH	CWK	13.08.13	FINISH SEE TABLE		
	ECO-1111-113 근거 도면 제작성 (LOOKUP C 용량 추가)	YJH			11.11.17	WIRE RANGE		CLASS
	설계서양변경(S100267)근거 도면 제작성	KMH	CWK	KKJ	10.11.03	INSULATION		TYPE 7283-8850-30
	설계서양변경(S060027)근거 도면 제작성	LDG	HSK	KKJ	06.01.18	TOLERANCE RECTIFY AS NOTED		SCALE 2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG643284
DR.	HEO S.H 04.8.23	CHK.				PART NAME		RH 6P FEMALE ASS'Y(RH06FB)
CHK.	KKJ 8/23	APP.	KCH	8/23				