


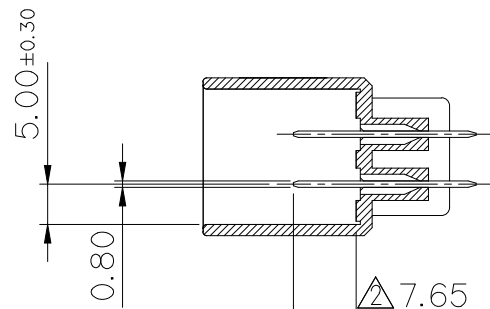
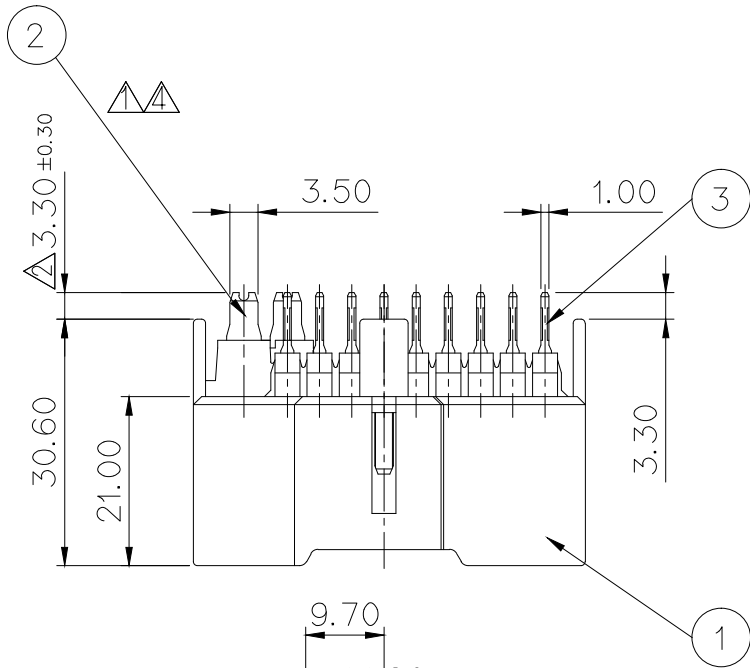


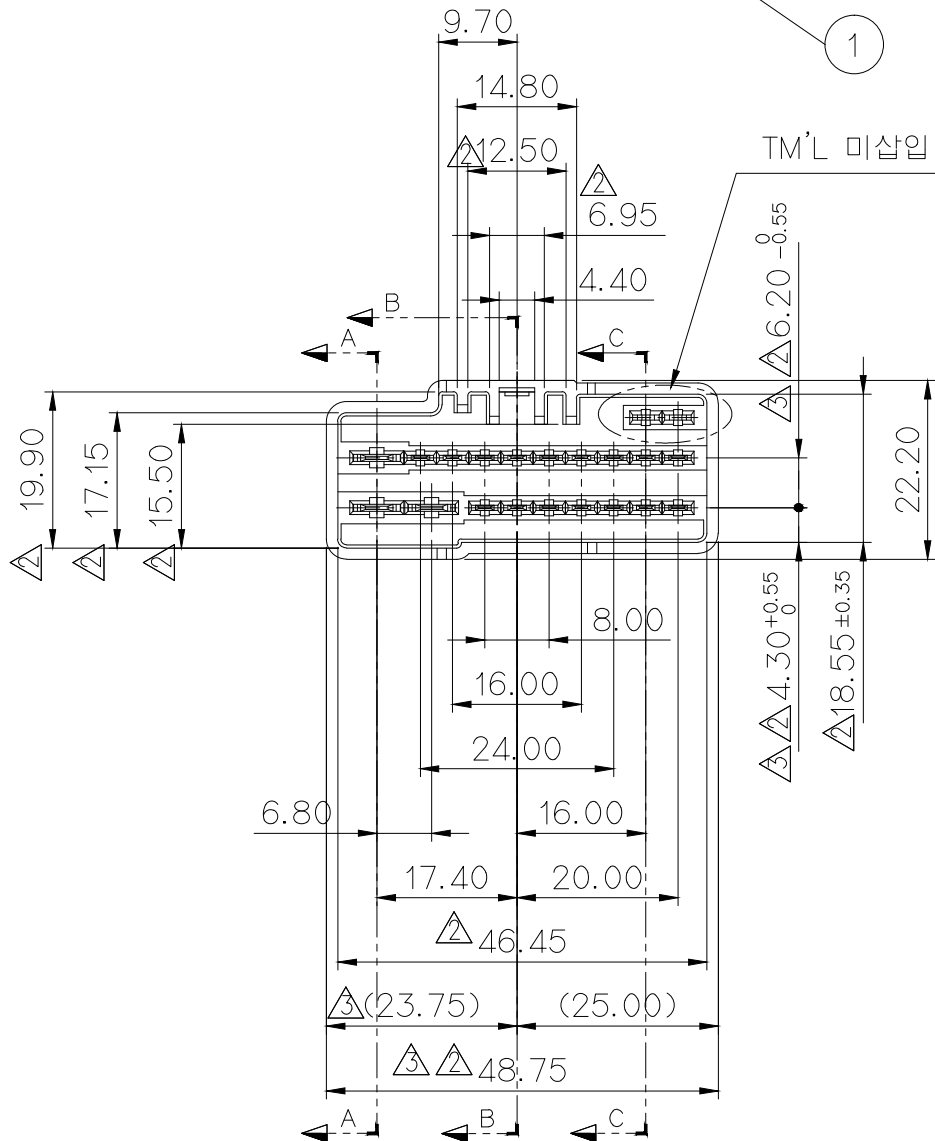

SEC A-A
(187-II SECTION)


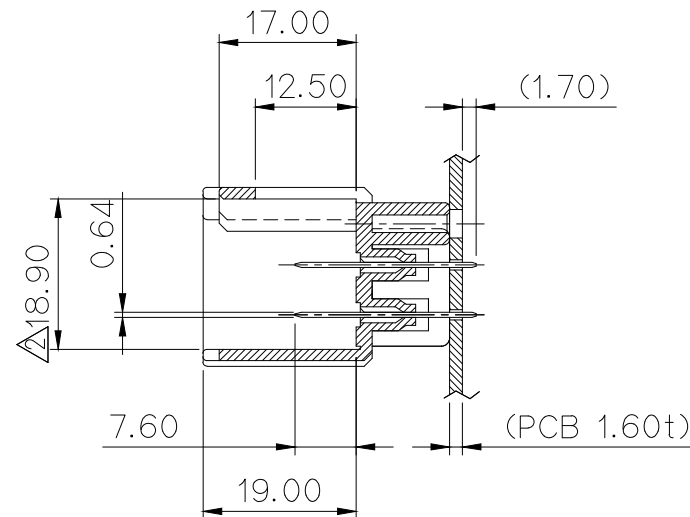


SEC B-B
(090-II SECTION)



SEC C-C
(090-II SECTION)

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

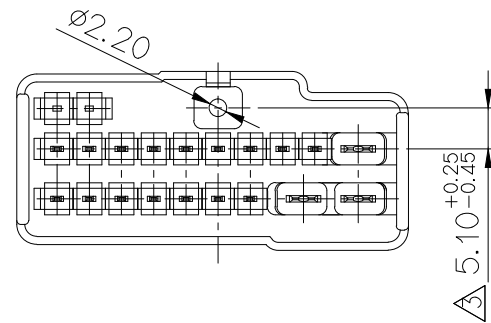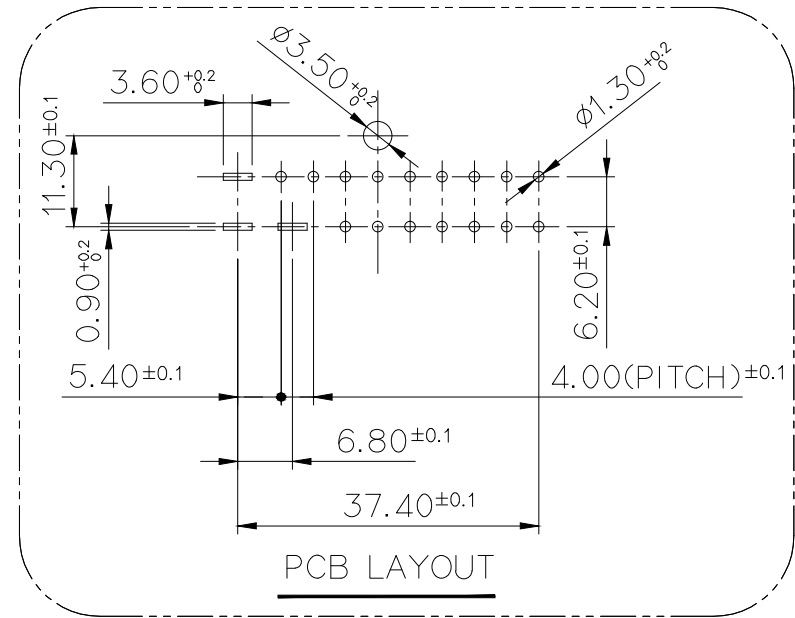

주 기

- 지시하지 않은 반경 R은 0.3로 한다
- 기능상 유해한 BURR, WELDLINE 및 미성형 등이 없을것.
- 적용 FEMALE HOUSING : MG612102
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV지침 및 RoHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICATION FEMALE HOUSING : MG612102
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,PBBs,PBDEs,HEXAVALENT CHROMIUM) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NAME	MATERIAL	FINISH	Q'TY
①	1809 21M PCB HOUSING (VRT)	PBT	NATURAL	1 EA
②	187-II PCB MALE TERMINAL (VRT)	BRASS	PRE-TIN	3 EA
③	090-II PCB MALE TERMINAL (S)	BRASS	PRE-TIN	16 EA

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
	설계사양변경(S080258)근거 수정 (SnPb 추가도금 삭제)	CDH		'08.10.30	FINISH	SEE TABLE	
	원 개선 형상, 치수변경	SHIN	S.W. HWANG	K.J. KIM	'05.10.07		
	제품 치수 변경	S.H.PARK	S.W. HWANG	K.J. KIM	'05.07.11	WIRE RANGE	CLASS 1809
	187-II TM'L 도금사양 변경	SHIN		K.J.KIM	C.H. KIM	'04.09.15	INSULATION
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1
DR.	SHIN '04.03.11.	CHK.BIN '04.03.11.		PART NAME			
CHK.	K.J.KIM '04.03.11.	APP.C.H.KIM '04.03.11.		1809 21M PCB ASSY (VRT-19P TYPE)			

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK