

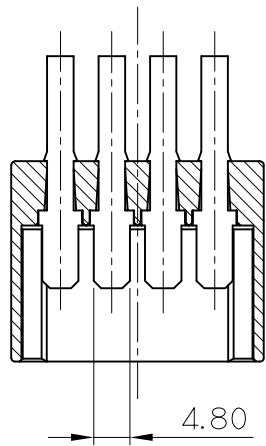






GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

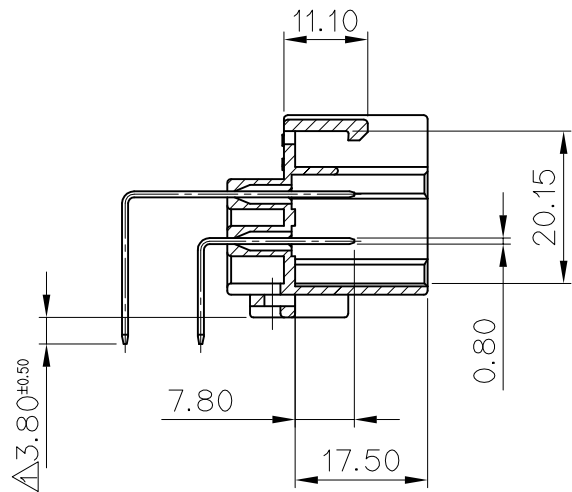

SEC. B-B

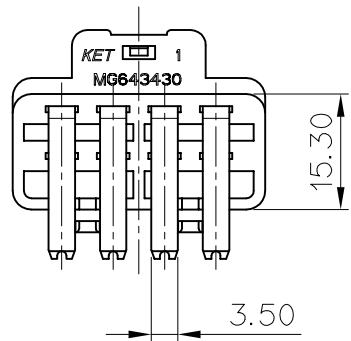

SEC. A-A

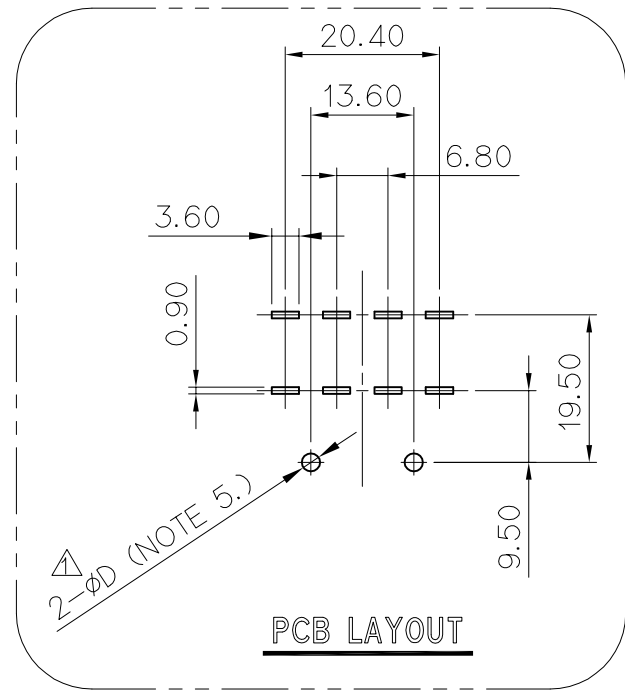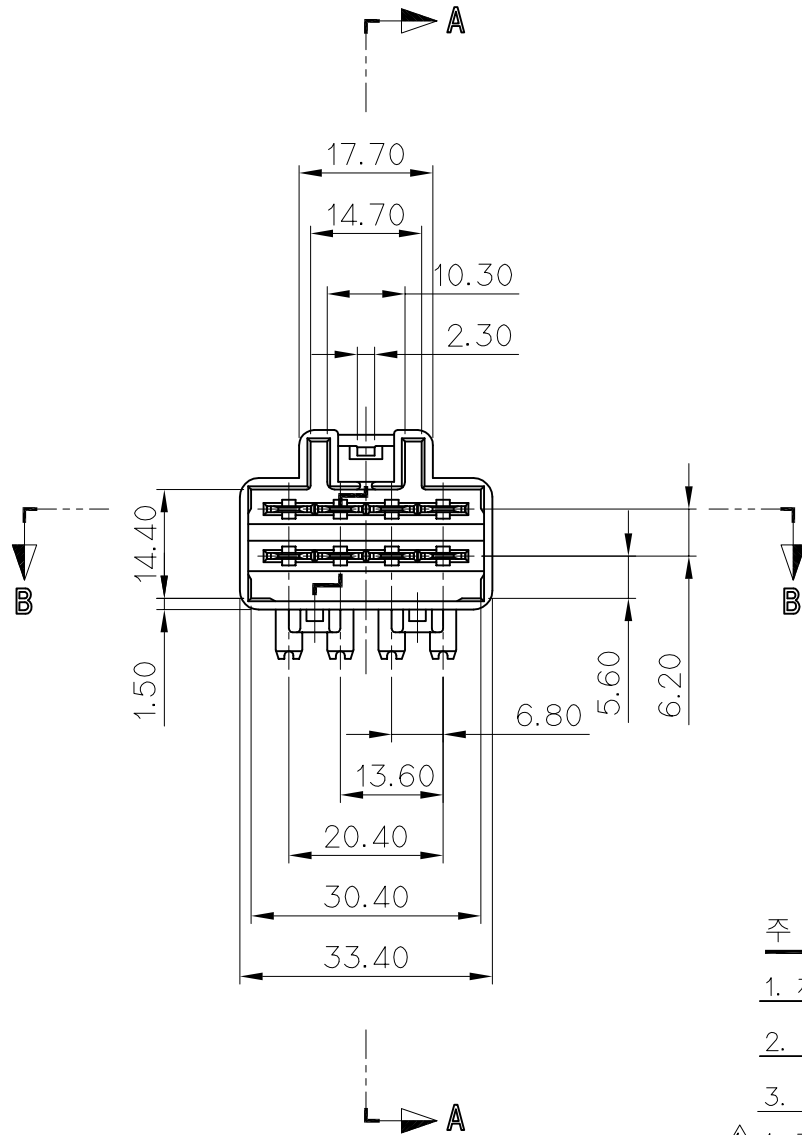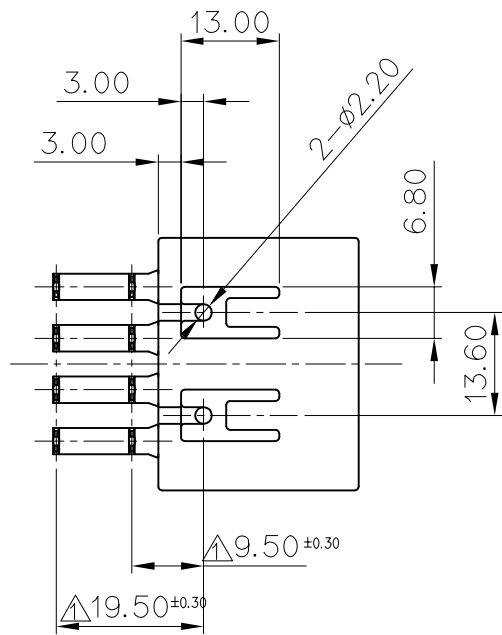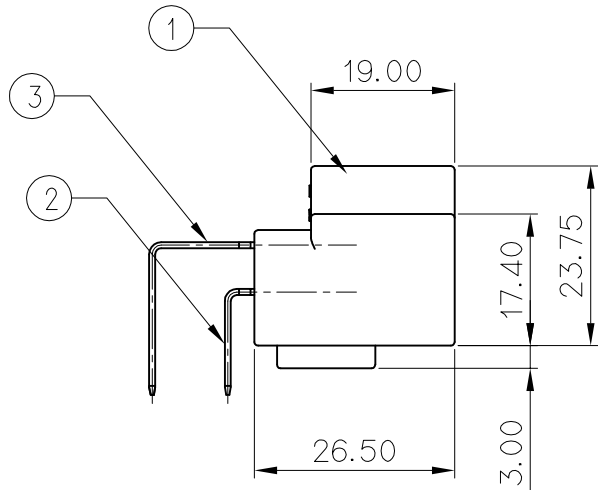


주 기

- 지시하지 않은 반경 R은 0.5로 한다
- 기능상 유해한 BURR 및 변형이 없을것.
- 적용 FEMALE HOUSING : MG652220
- 적용 BOLT : M2.5~M3 일반나사
- SCREW HOLE 직경 : $\phi D = \text{적용 SCREW} + 0.5$

NOTES

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING FEMALE HOUSING : MG652220
- APPLICABLE MOUNTING SCREW : M2.5~M3 SCREW
- SCREW HOLE DIAMETER : $\phi D = \text{APPLICABLE MOUNTING SCREW} + 0.5$

NO.	PART NAME	PART NO	MATERIAL	FINISH	Q'TY
①	187-II 8M PCB HOUSING	MG673429	PBT	BLACK	1 EA
②	187-II PCB M TERMINAL (S)	P901975	BRASS	PRE-TIN	4 EA
③	187-II PCB M TERMINAL (L)	P901976	BRASS	PRE-TIN	4 EA

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	CLASS		187-II
					INSULATION	TYPE		
	BENDING부 관리공차 수정	SHIN		'05.03.08				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
	JIN 2004. 6.25					SEE TABLE	1/1	MG643430
DR.	JIN 2004. 6.25					PART NAME		
CHK.	K.J.KIM. 6/29	APP.	C.H.KIM.	6/29	187-II 8M PCB ASSY (HZT)			