

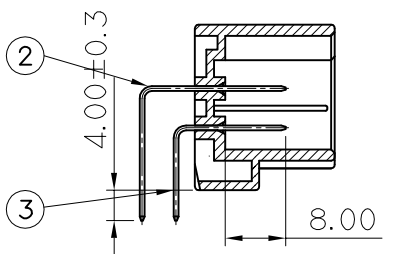
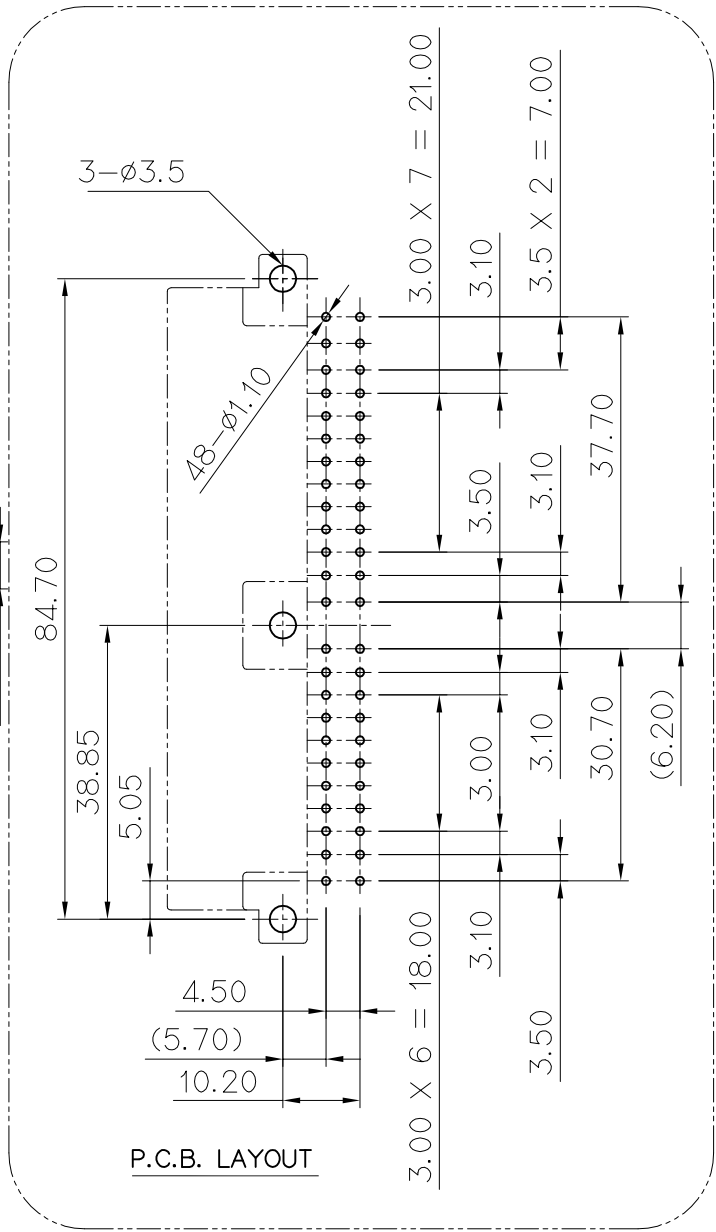
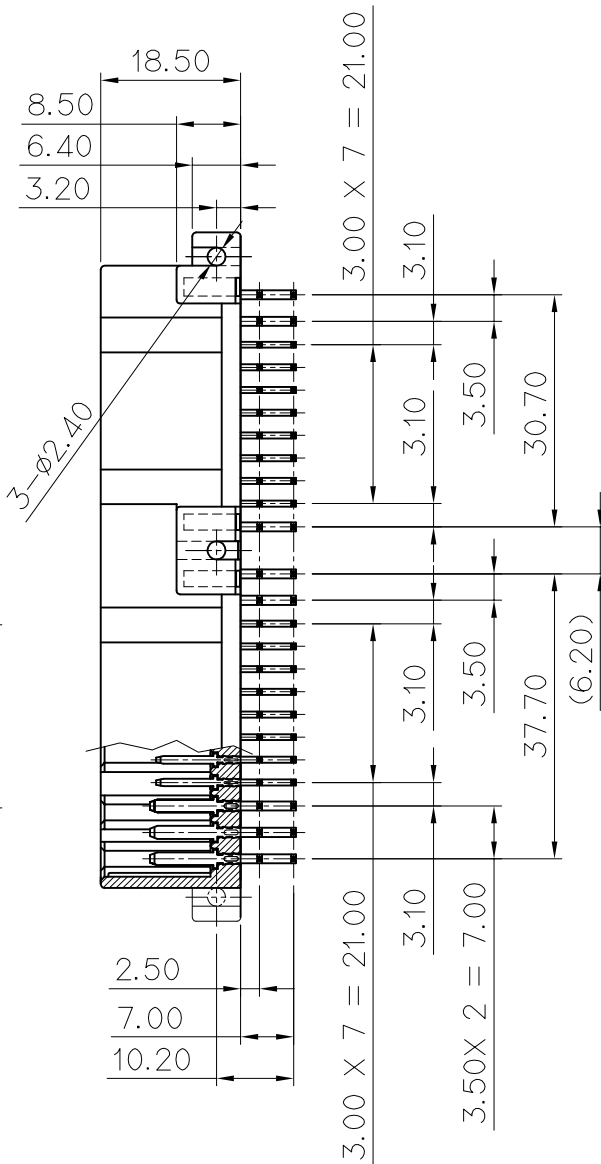
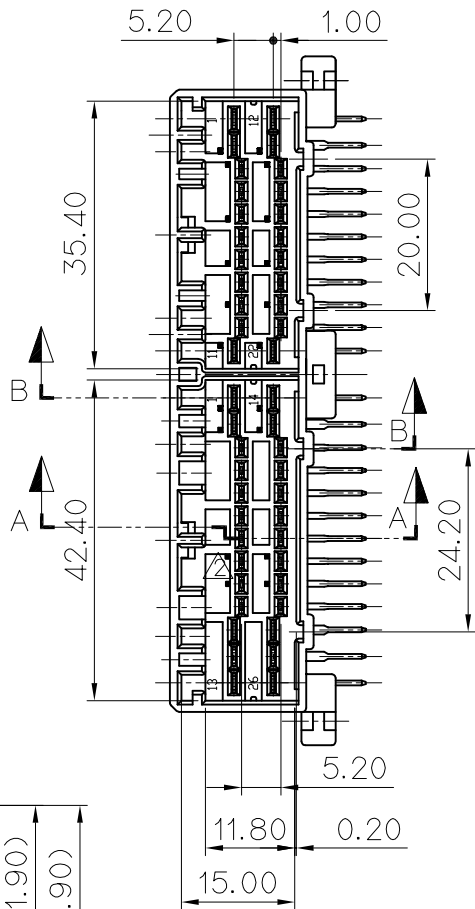
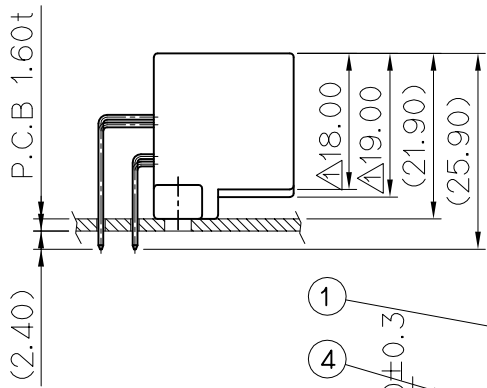


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

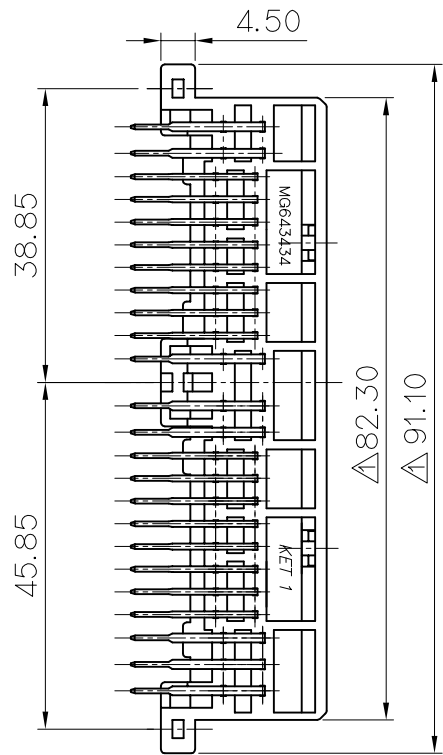

SECTION B-B

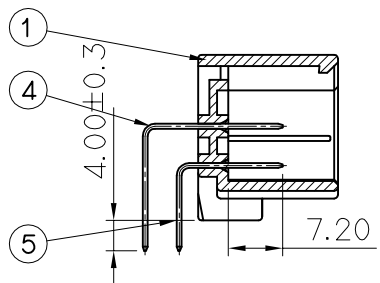

SECTION A-A

NOTE

- 본 제품은 ES91500-00 SPEC'을 만족할것.
- 기능상 유해한 BURR등 변형이 없을것.
- 적용 PLUG HOUSING : MG611336 (26P), MG611334 (22P)
- 적용 SCREW : M3

NO	PART NAME	MATERIAL	FINSH	Q'TY
1	0407 48P REC HS'G (HZZT)	PBT+G/F30%	NATURAL	1 EA
2	070 TAB TM'L J/T (M)	BRASS	PRE-TIN	8 EA
3	070 TAB TM'L J/T (S)	BRASS	PRE-TIN	8 EA
4	040 II TAB TM'L J/T (M)	BRASS	PRE-TIN	16 EA
5	040 II TAB TM'L J/T (S)	BRASS	PRE-TIN	16 EA

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
	설계사양변경(S100070)근거	CYJ			'10.03.30	WIRE RANGE		CLASS	HYBRIDE
	고객 요청에 의한 참고치수 변경	SHIN K.J.KIM	C.H. KIM		'05.05.17	INSULATION		TYPE	.040 .070
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
							SEE TABLE	1/1	MG643434
DR.	SHIN	'04.10.04.	CHK.	KO.	'04.10.05.	PART NAME			
CHK.	K.J.KIM.	10/5	APP.	C.H.KIM.	10/5	0407 PCB 48P CONN'T ASS'Y (HZZT)			

ISSUE MARK