
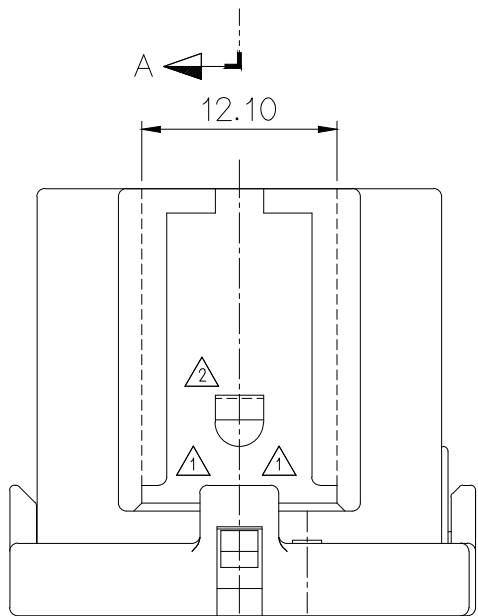
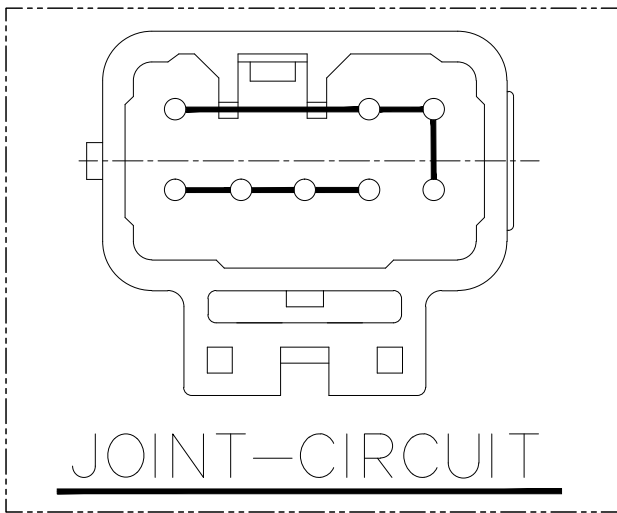
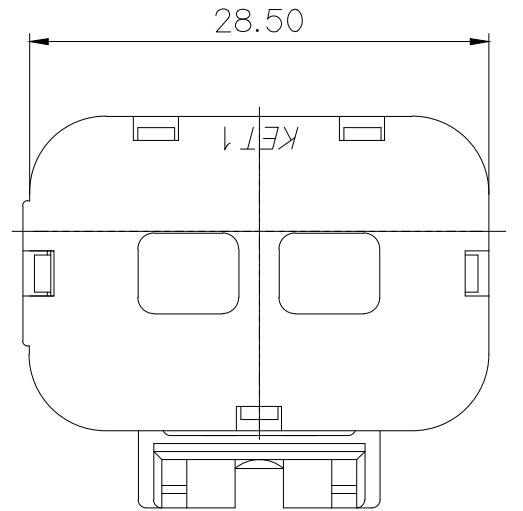
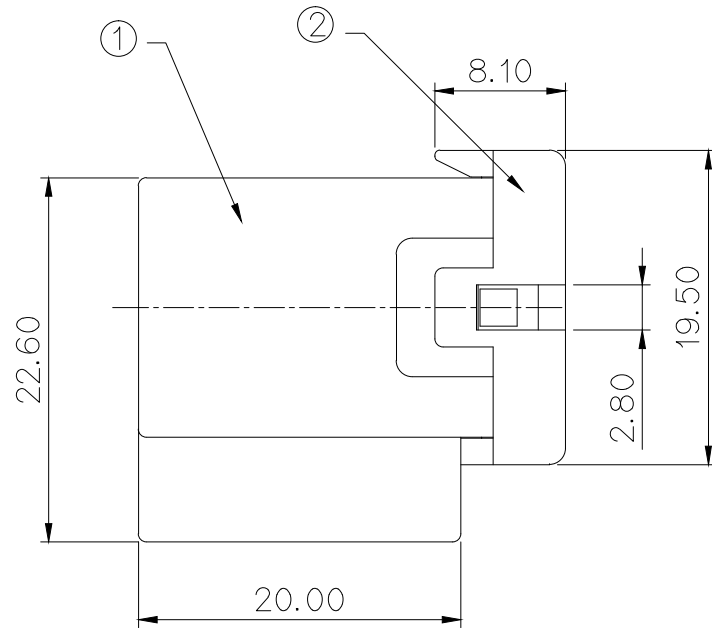
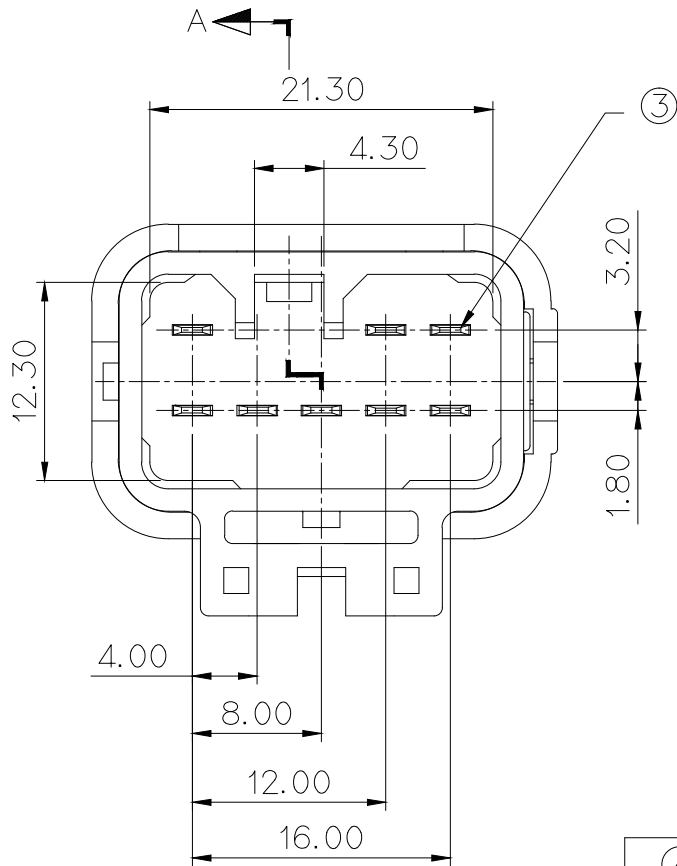
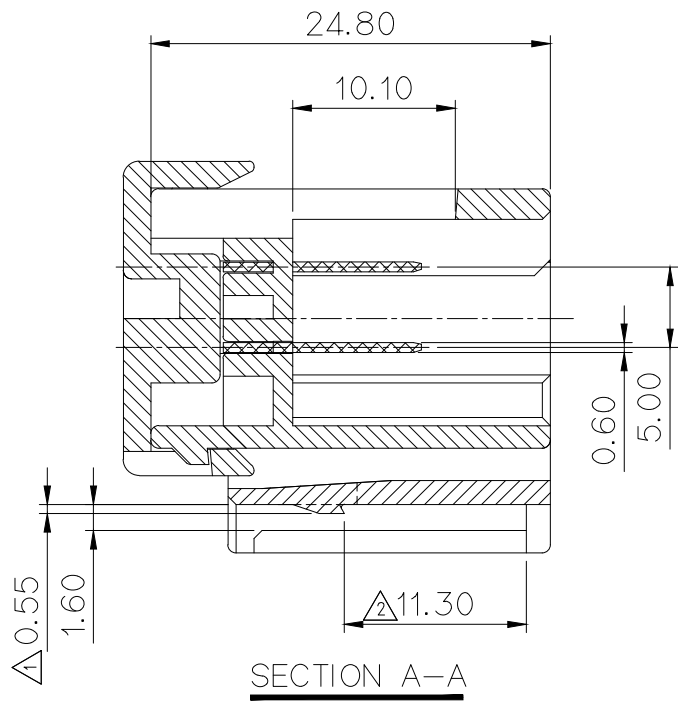


NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE CONNECTOR : MG651050,MG612231
3. APPLICABLE CLIP : 090II CLIP
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM,
PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION.

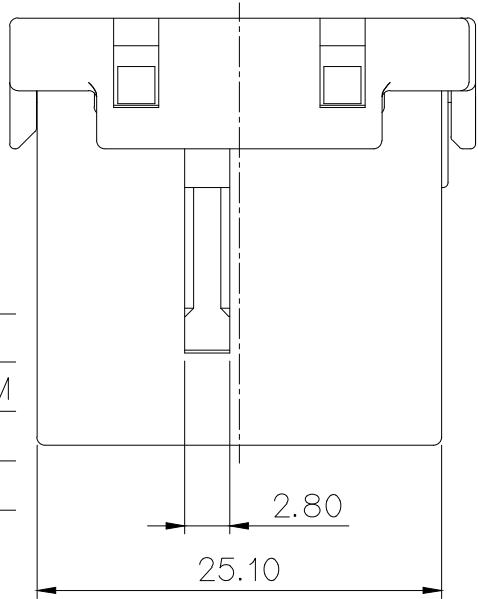

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 CONNECTOR : MG651050,MG612231
3. 적용 CLIP : 090II CLIP
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴,
6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS
법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

④	P901471	090II JOINT TAB 4WAY-1열	BRASS	PRE-TIN
③	P901470	090II JOINT TAB 4WAY-2열	BRASS	PRE-TIN
②	MG672488-7	090II JOINT 8P R/HOLDER	PBT	BROWN
①	MG673308-6	090II JOINT 8P HOUSING	PBT	GREEN
NO.	PART NO.	PART NAME	MATERIAL	FINISH



						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
③	ECO-1610-046 근거 도면 재작성	YTK	CJH	LSY	'16.10.12	WIRE RANGE			CLASS
②	CLIP 매칭 부 용격 축소 (ECO-1409-006) 근거	ASY	HYJ	LSY	'14.09.01	INSULATION			TYPE
①	설계사양변경(S070017)근거 도면 재작성	KBS	정	정	'07.01.23	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG643468-6
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		
DR. KYM 04.10.06		CHK.				090II JOINT 8P ASSY (4P+4P)			
정 10/8		APP. 정		10/9					

ISSUE MARK