






SECTION B-B
(090)





SECTION A-A
(040)



SECTION C-C
(187)

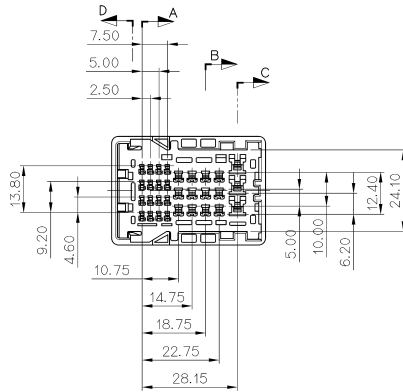

SECTION D-D



GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
2. 적용 TERMINAL(187) : ST740631, 632, 633
- 적용 TERMINAL(090) : ST740672, 673, 674
- 적용 TERMINAL(040) : ST740771, 959
- 적용 HOUSING : MG653504
- 적용 WIRE COVER : MG633511

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL(187) : ST740631, 632, 633
- APPLICABLE TERMINAL(090) : ST740672, 673, 674
- APPLICABLE TERMINAL(040) : ST740771, 959
- APPLICABLE HOUSING : MG653504
- APPLICABLE WIRE COVER : MG633511



ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
1	MG673508	LIF 31P MALE HOUSING	PBT	NATURAL
2	MG673509	LIF 31P MALE SPACER		YELLOW

MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.			
FINISH	SEE TABLE				
WIRE RANGE		CLASS			
INSULATION		TYPE			
LTR	REVISION RECORD	DR	DATE	SCALE	PART NO.
DR	KYM 04.11.02	CHK		1/1	MG643507
CHK		APP.		PART NAME	LIF 31P MALE ASS'Y