


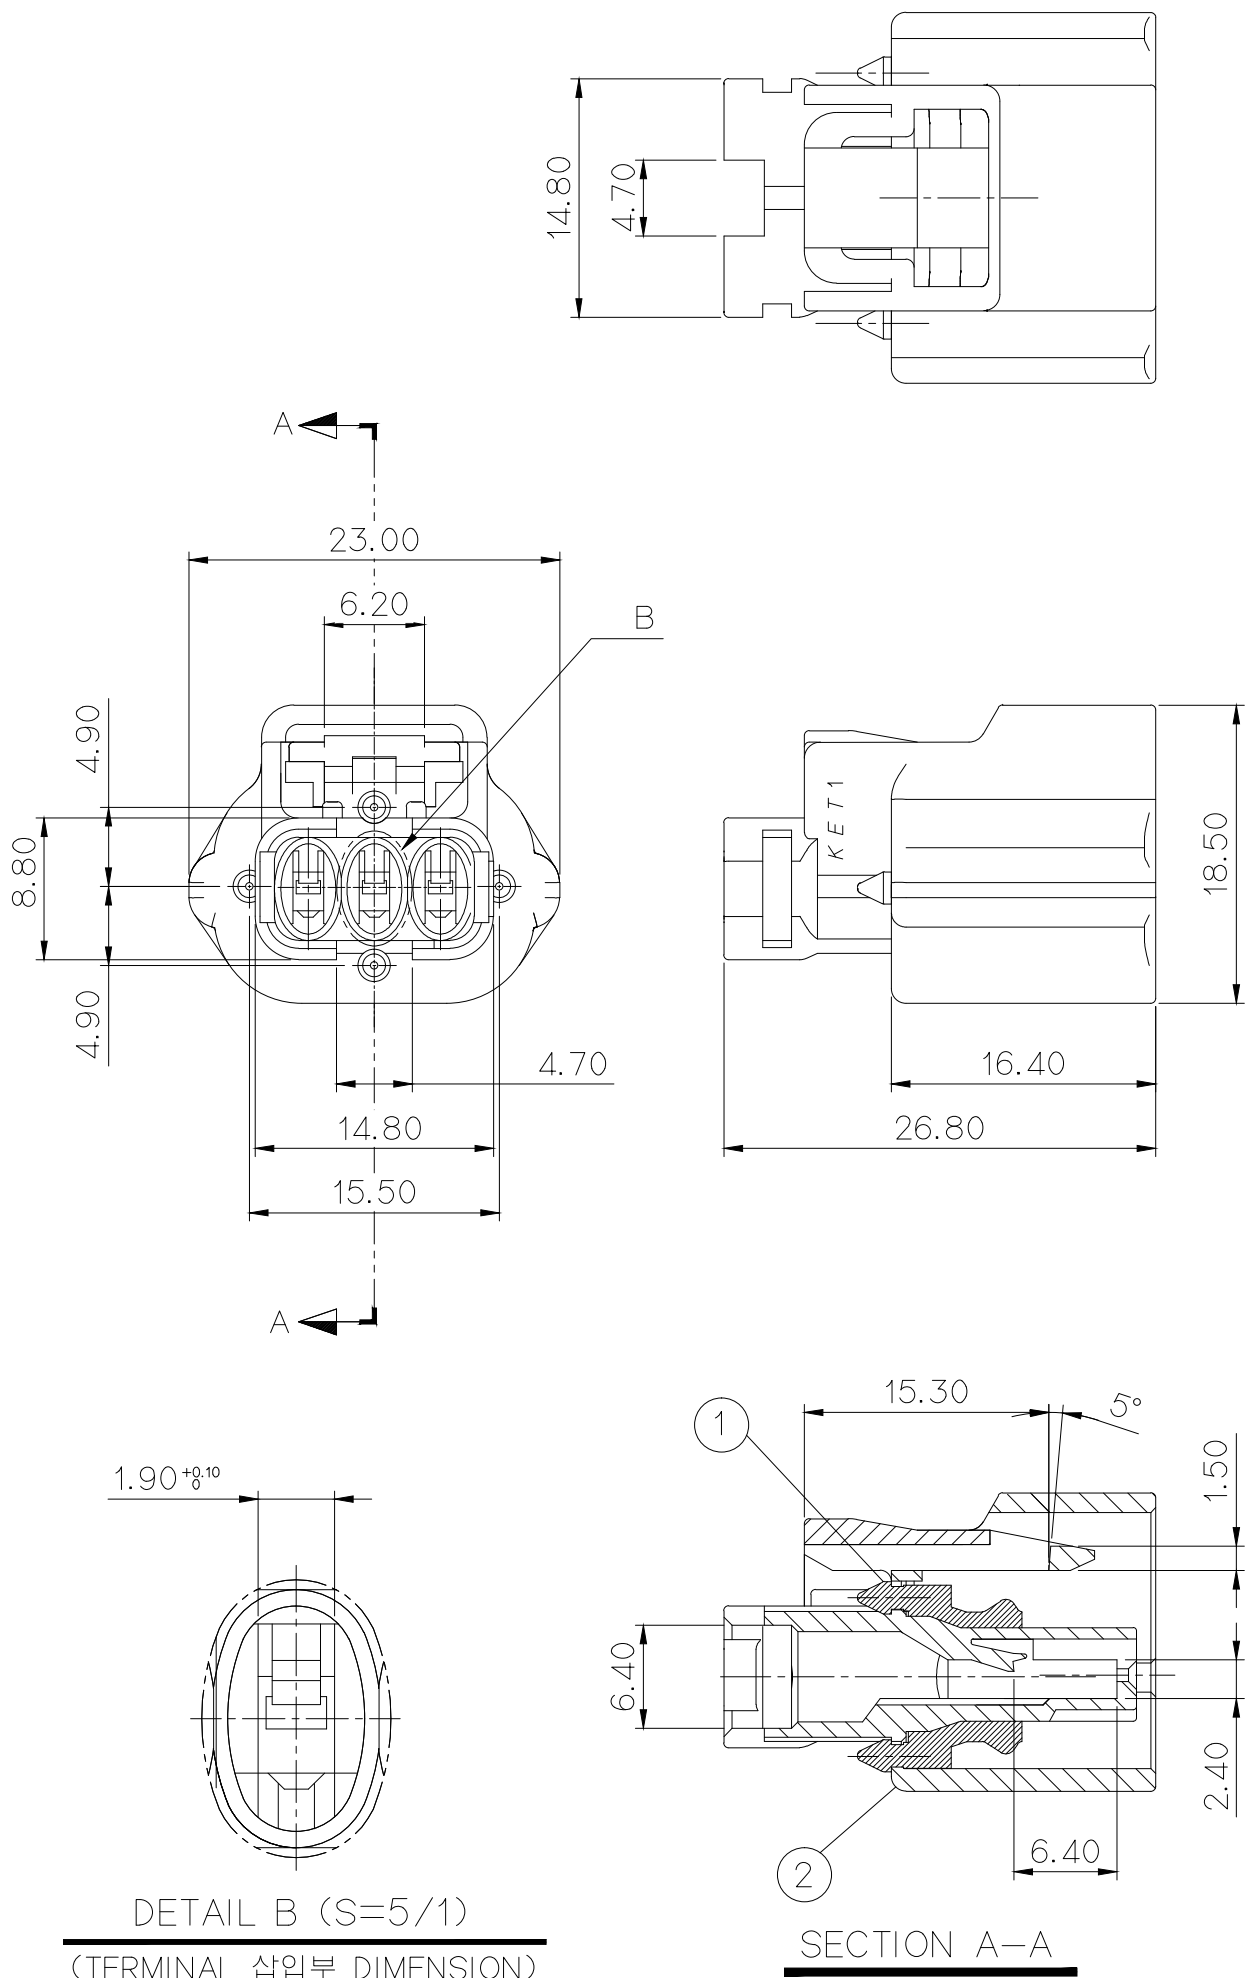


NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

- 주 기
1. 기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것.
- △ 2. 적용 TERMINAL : ST730622, ST731316, ST731103, ST731188
- 적용 REAR HOLDER : MG631233
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- △ 2. APPLICABLE TERMINAL : ST730622, ST731316, ST731103, ST731188
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

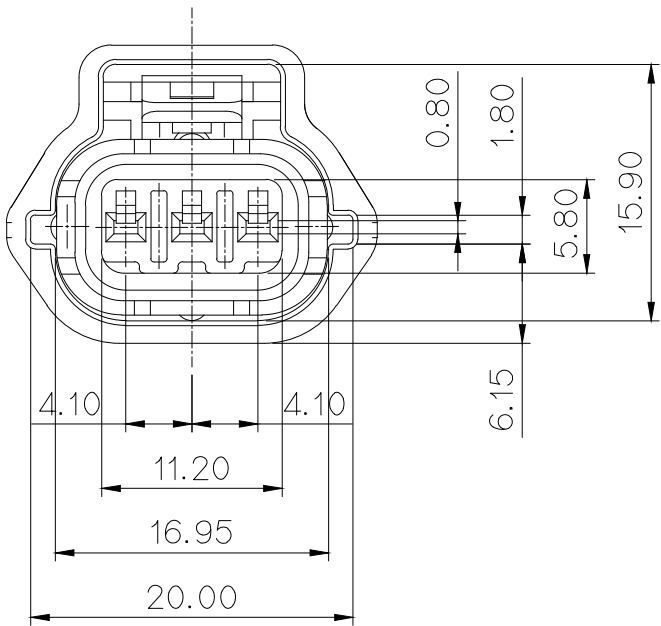

NO.	ASSY NO.	PART NO.	PART NAME	MATERIAL	FINISH
①		MG673743	050 WP 3F HOUSING	PBT	BLACK
②	MG643744	(P900694)	SSD 3P INNER SEAL	SILICONE	RED

APPROVED

2021-11-03

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

					MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
△ 1	ECO-1606-244 근거 도면변경	JH.K	SSH	SUK	'16.06.21	WIRE RANGE	CLASS
△ 2	최초 작성	JYS	HSH	KKJ	'09.02.25	INSULATION	TYPE
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED
DR.	JYS	'09.02.25	CHK.	HSH	'09.02.25	SCALE	PART NO.
CHK.	KKJ	'09.02.25	APP.	WATANABE	'09.02.25	2/1	MG643744
						PART NAME	050 WP 3F HOUSING ASSY(A)