


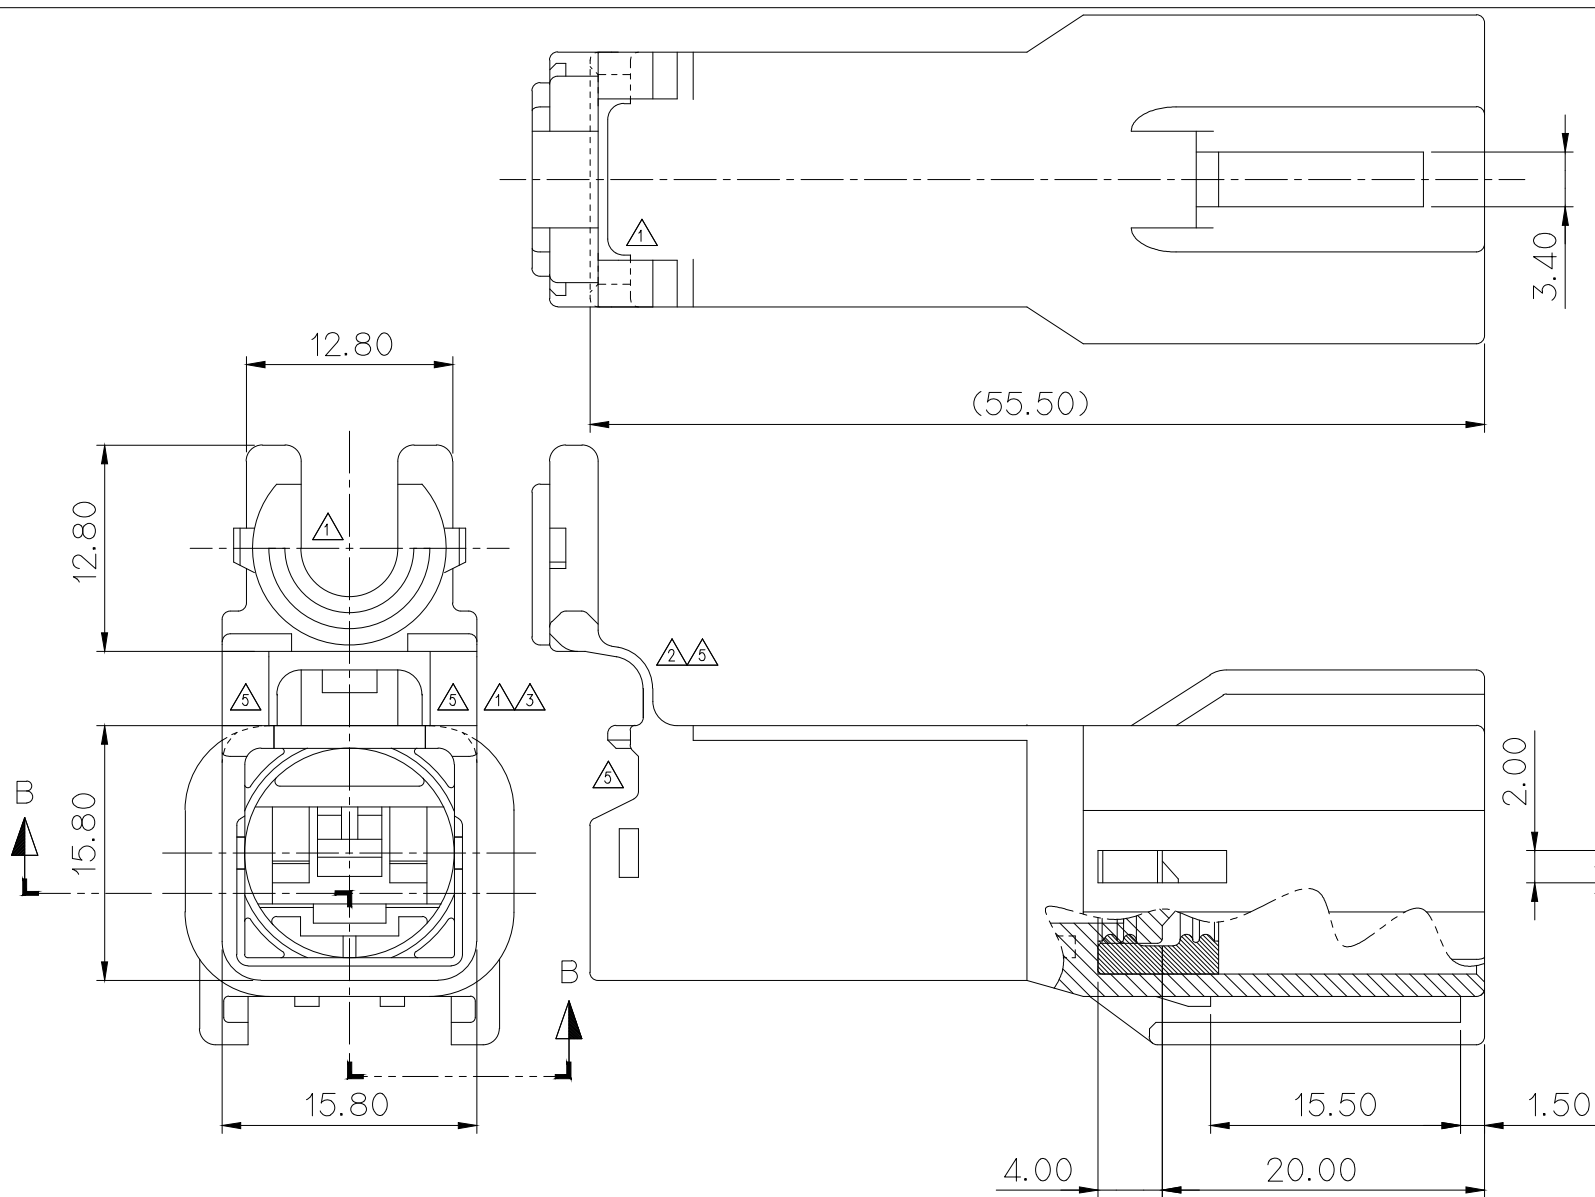

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.5로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 TERMINAL : ST740539
적용 HOUSING : MG613801
적용 WIRE SEAL : MG683802, △MG685635
적용 CLIP : MG633790
- △ 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
△4* 0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
* 40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST740539
APPLICABLE HOUSING : MG613801
APPLICABLE WIRE SEAL : MG683802, △MG685635
APPLICABLE CLIP : MG633790
- △ 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG673799-5 MG673799-40 △MG673799	375 WP 1M HOUSING	PBT	BLACK DARK GRAY △NATURAL
②	R602108	375 WP 1P INNER SEAL	SILICONE	RED

△ECO-1701-219 근거 도면 변경 (Hinge 부 형상 개선) △ECO-1507-026 근거 도면 재작성 (색상 추가) △HINGE 부 형상개선 (ECO-1406-178) 근거 △설계사양변경(S090183)근거 도면 재작성 (HINGE 부 형상개선) △설계사양변경(S080130)근거 도면 재작성 (HINGE 부 형상개선 및 살빼기 추가)	KJS	KMH	LSY	'17.01.11	MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
	SY.L	CKY	LSY	'15.07.03	FINISH SEE TABLE				
	ASY	HYJ	LSY	'14.06.24	WIRE RANGE				
	BJG	LSY	KKJ	'09.07.13	INSULATION				
	KMH	HSH	KKJ	'08.06.04	TYPE 7222-4210-30				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG643800
DR.	KBS 2007.01.30		CHK.	HSH		2/6	PART NAME 375 WP 1M ASSY		
CHK.			APP.	KKJ		2/6			

△6 ECO-2003-317 근거 도면 변경 (WIRE SEAL 사양 추가)	SY.L	HYJ	CJH	'20.03.23
--	------	-----	-----	-----------