
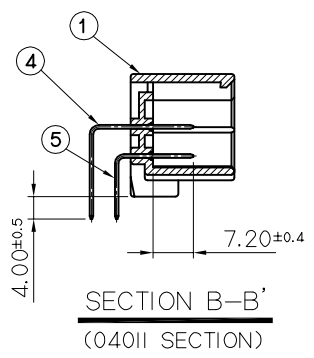
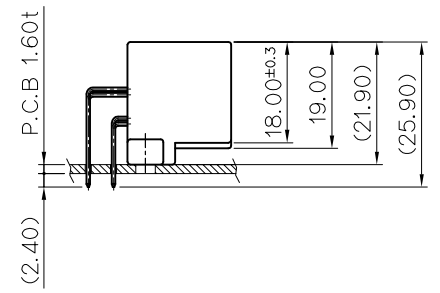

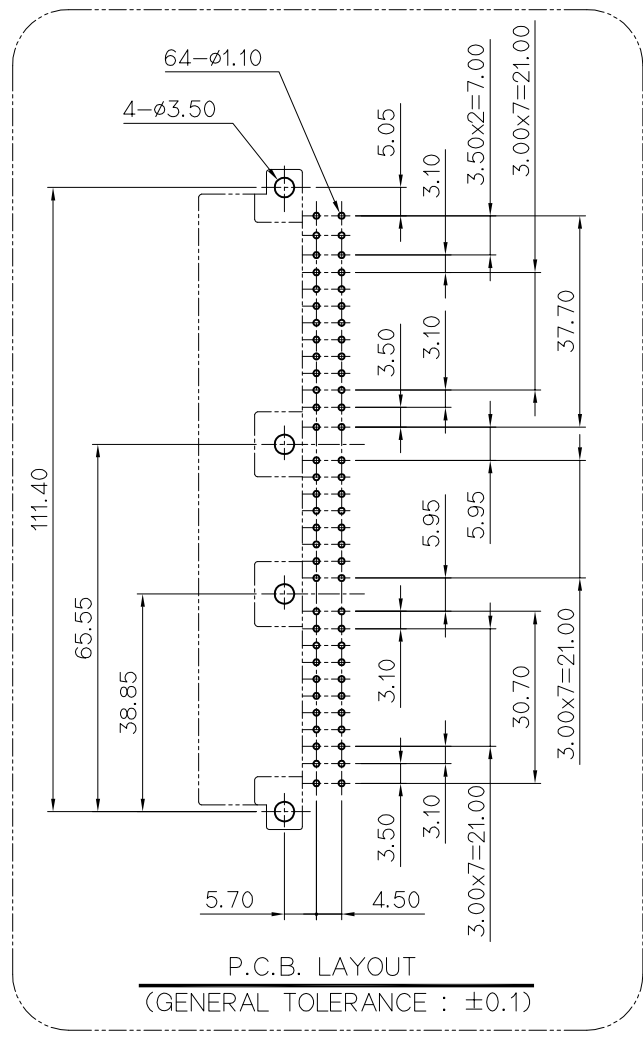
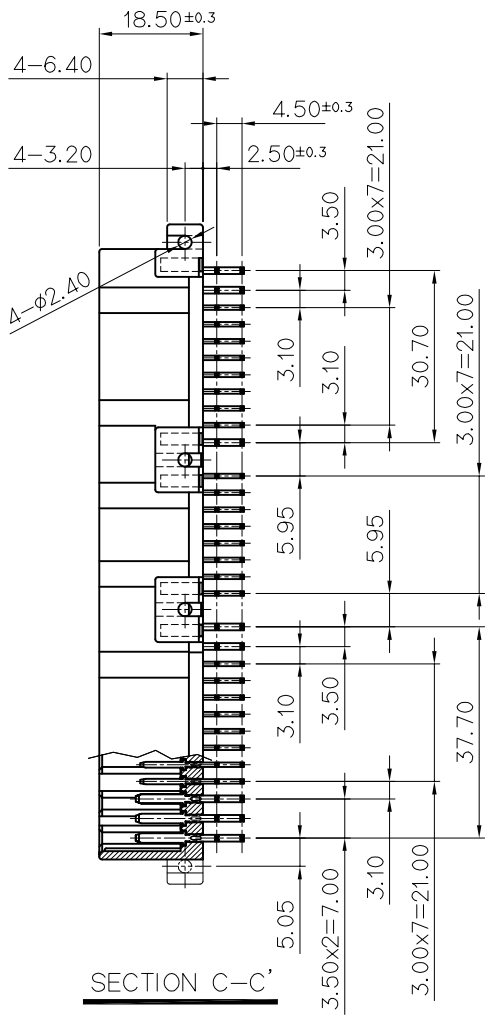
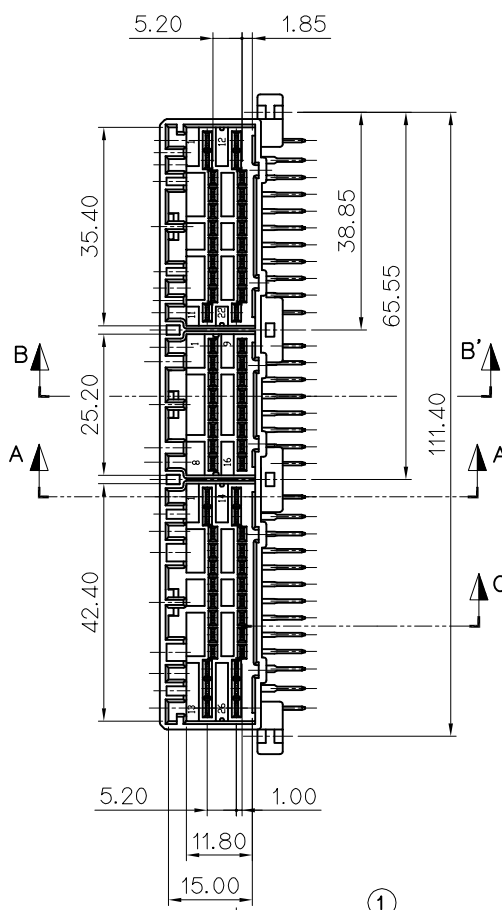
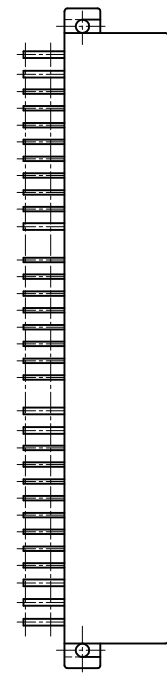


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

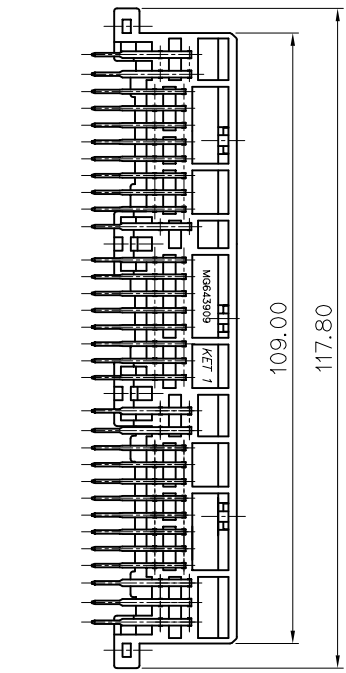

- NOTE
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
 - UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
 - MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE FEMALE HS'G: MG611336 (26P), MG611332 (16P), MG611334 (22P)
 - APPLICABLE MOUNTING SCREW : M3 SCREW
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

- 주 기
- 지시하지 않은 반경 R은 0.5로 한다
 - 지시하지 않은 모따기 C는 0.5으로 한다.
 - 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
 - 적용 FEMALE HS'G: MG611336 (26P), MG611332 (16P), MG611334 (22P)
 - 적용 SCREW : M3 일반나사
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO	PART NAME	PART NO.	MATERIAL	FINSH	Q'TY
1	0407 64M PCB HS'G (HZT)	MG673908	PBT+G/F30%	NATURAL	1 EA
2	070 PCB MALE TM'L J/T (M)	ST790773-3S	BRASS	PRE-TIN	8 EA
3	070 PCB MALE TM'L J/T (S)	ST790772-3S	BRASS	PRE-TIN	8 EA
4	040 II PCB MALE TM'L J/T (M)	ST790771-3S	BRASS	PRE-TIN	24 EA
5	040 II PCB MALE TM'L J/T (S)	ST790770-3S	BRASS	PRE-TIN	24 EA

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH	SEE TABLE			
						WIRE RANGE	CLASS		HYBRIDE	
						INSULATION	TYPE		.040 .070	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	MG643909
DR.	YSW '07.08.16		CHK.				SEE TABLE	1/1		
CHK.	 8/17		APP.  8/17				PART NAME		0407 64M PCB ASSY (HZT)	