

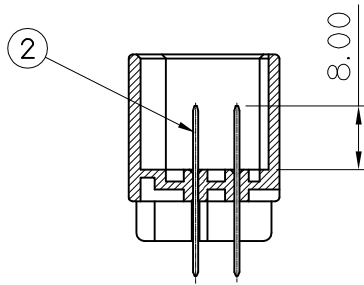
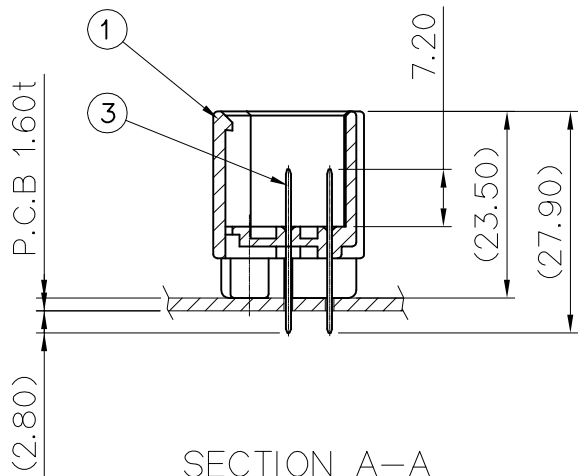
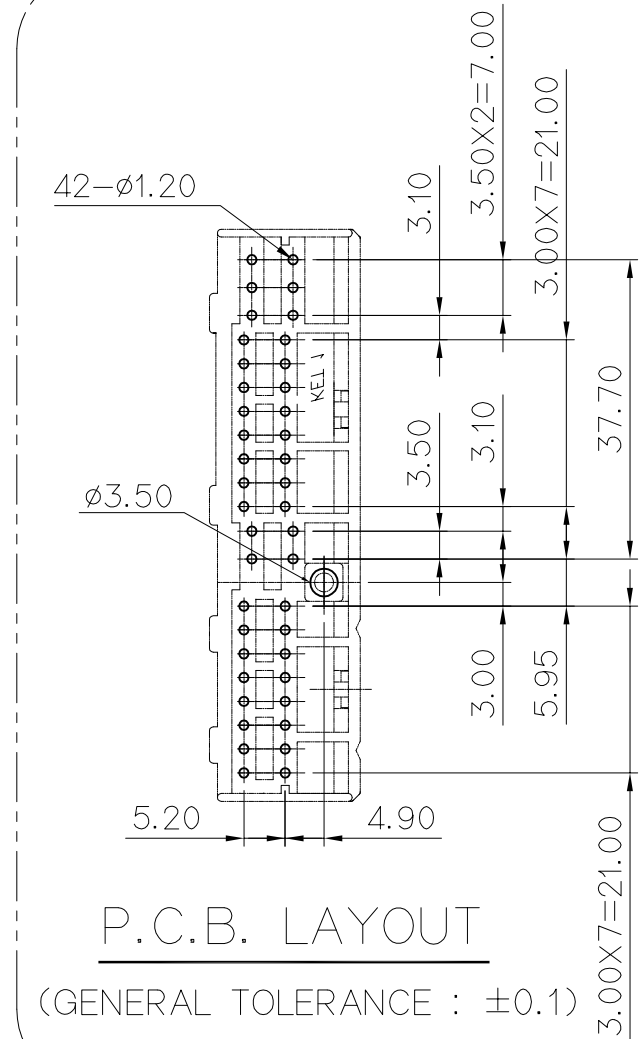
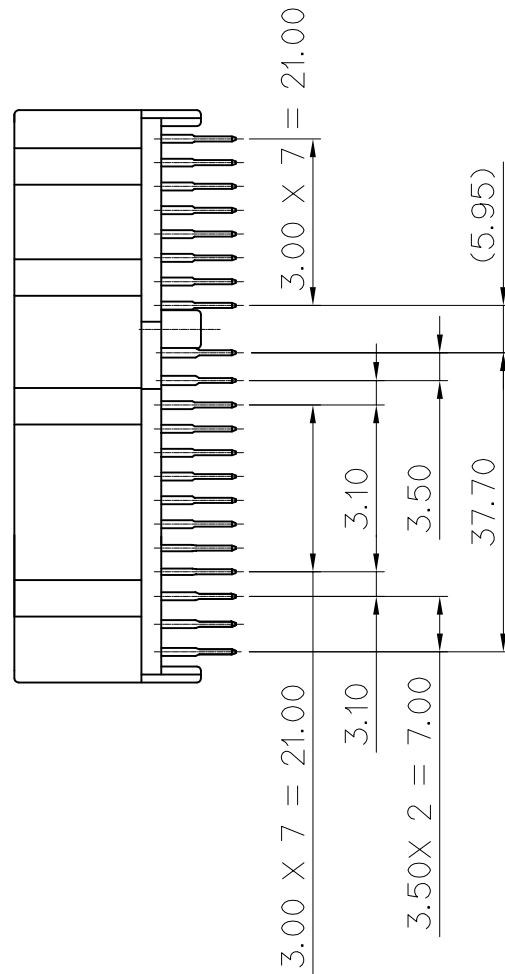
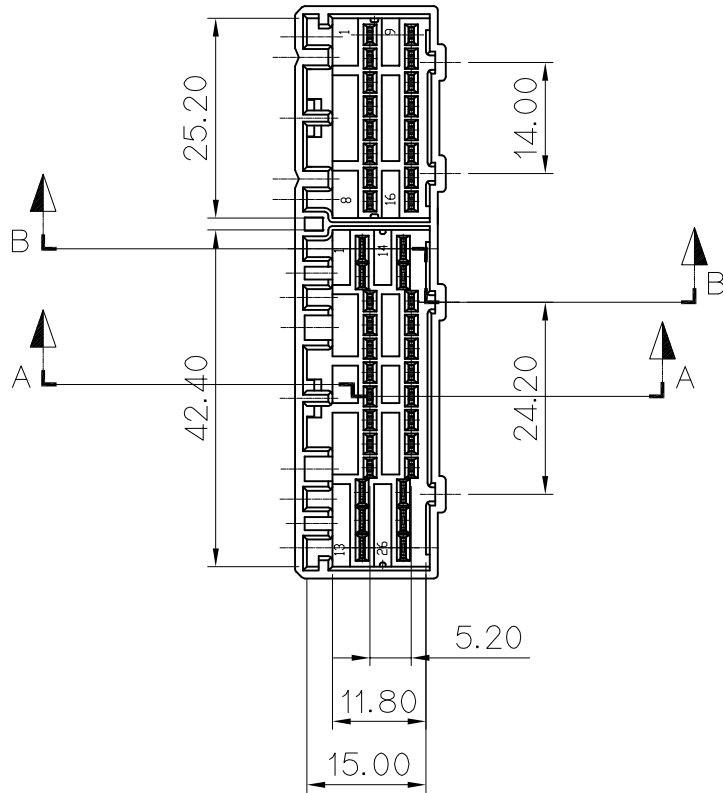
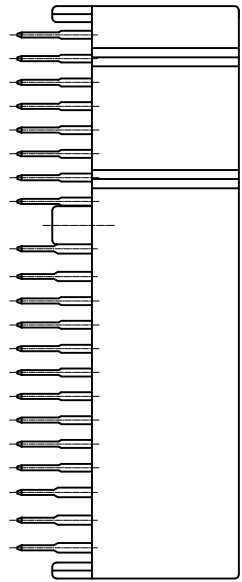


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

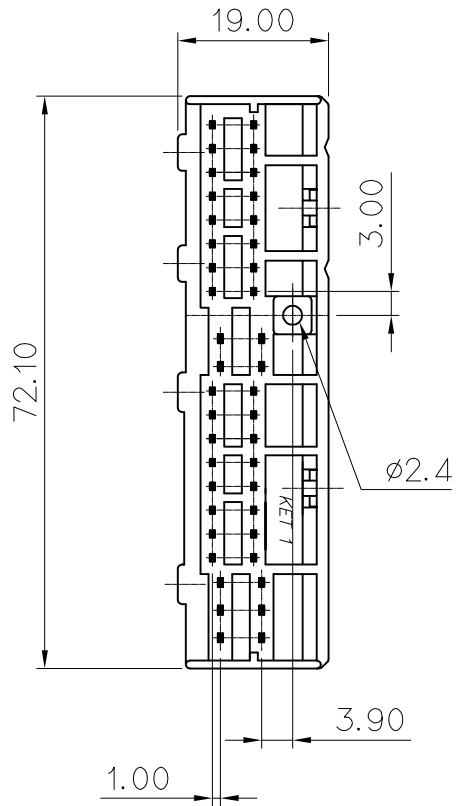

NOTE

- 지시하지 않은 반경 R은 0.5로 한다.
- 기능상 유해한 BURR등 변형이 없을것.
- 적용 PLUG HOUSING : MG611336 (26P), MG611332 (16P)
- 적용 SCREW : M3 일반나사

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING PLUG HOUSING : MG611336 (26P) , MG611332 (16P)
- APPLICABLE MOUNTING SCREW : M3 SCREW

NO	PART NAME	MATERIAL	FINISH	Q'TY
1	0407 42M PCB HOUSING(VRT)	PBT+ GF30%	NATURAL	1 EA
2	070 PCB M TERMINAL (VRT)	BRASS	PRE-TIN	10 EA
3	040 PCB M TERMINAL (VRT)	BRASS	PRE-TIN	32 EA

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS		HYBRIDE
					INSULATION		TYPE		.040 .070
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG643911
DR. PSH '07.04.17.			CHK.			PART NAME			
CHK.			APP.			0407 42M PCB ASSY (VRT)			

ISSUE MARK