

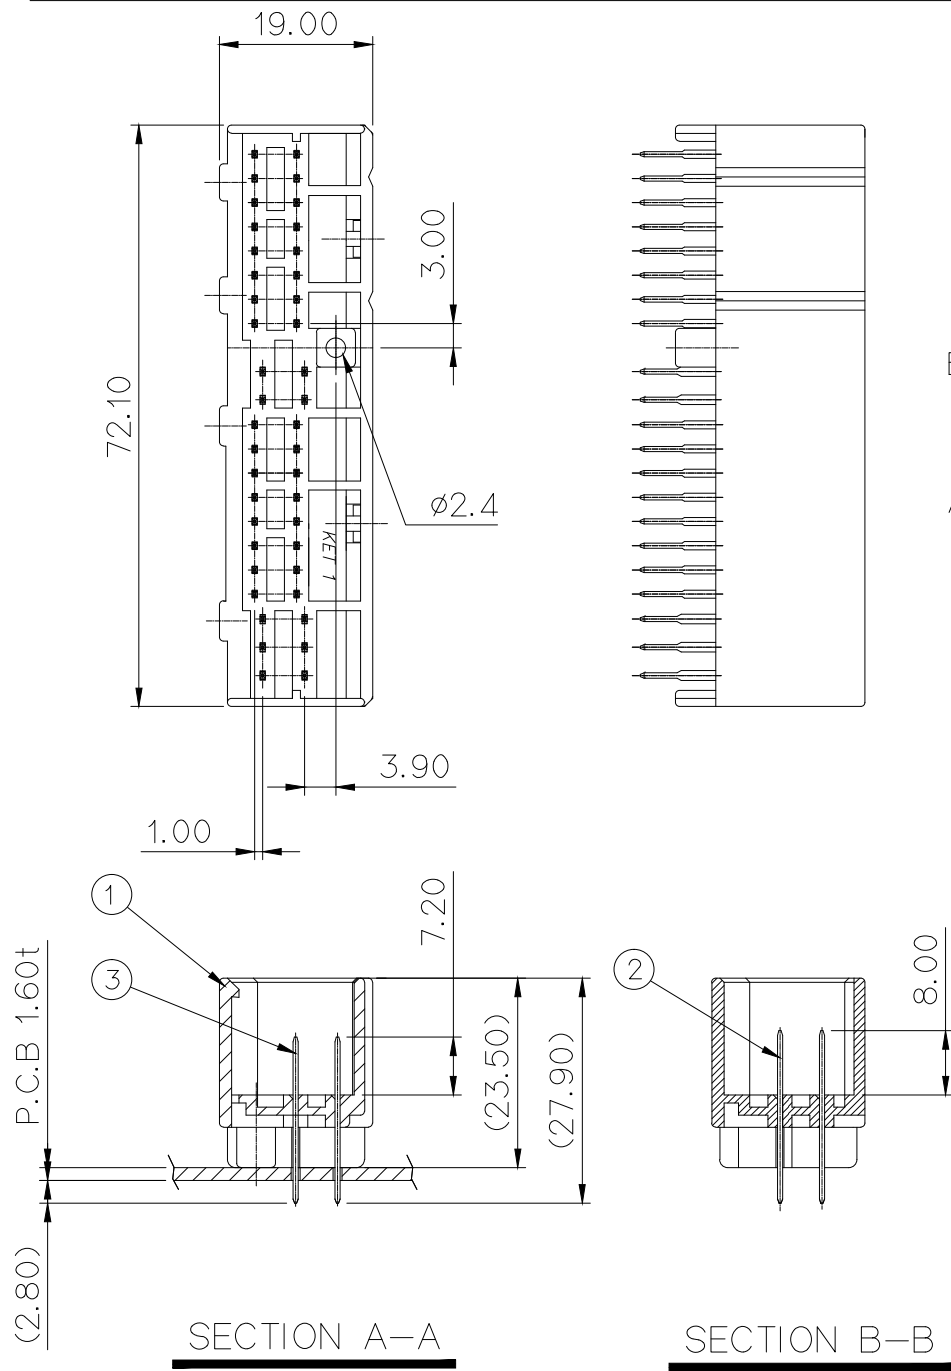


주 기

1. 지시하지 않은 반경 R은 0.5로 한다.
2. 기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것.
3. 적용 PLUG HOUSING : MG611336 (26P), MG611332 (16P)
4. 적용 SCREW : M3 일반나사
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

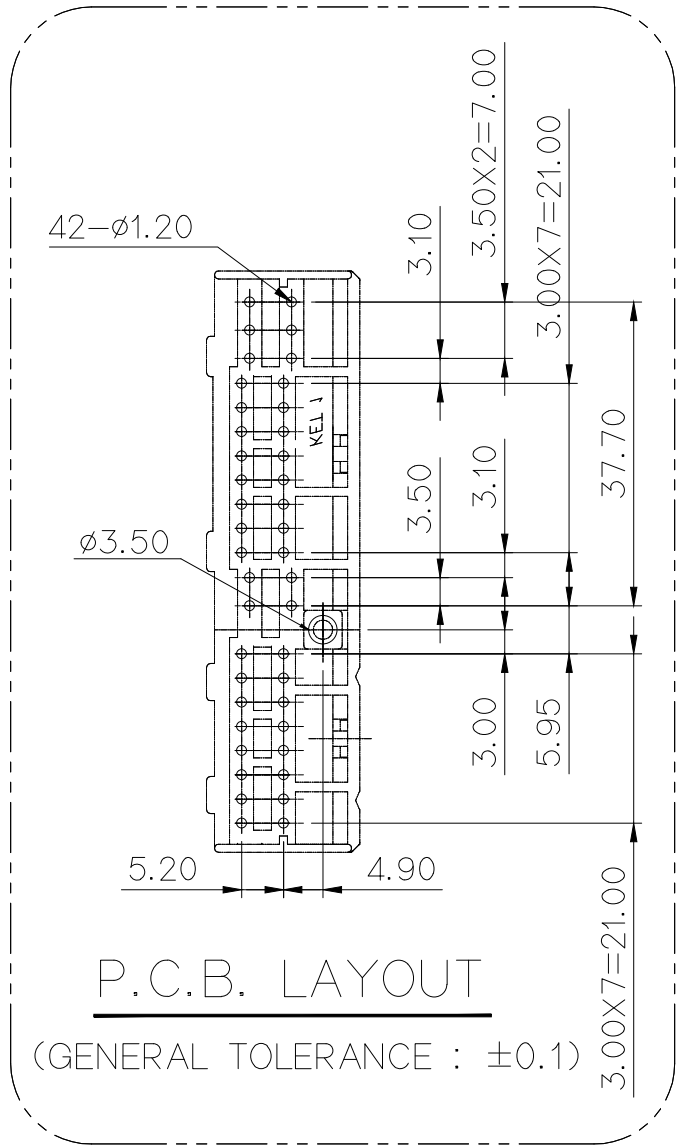

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

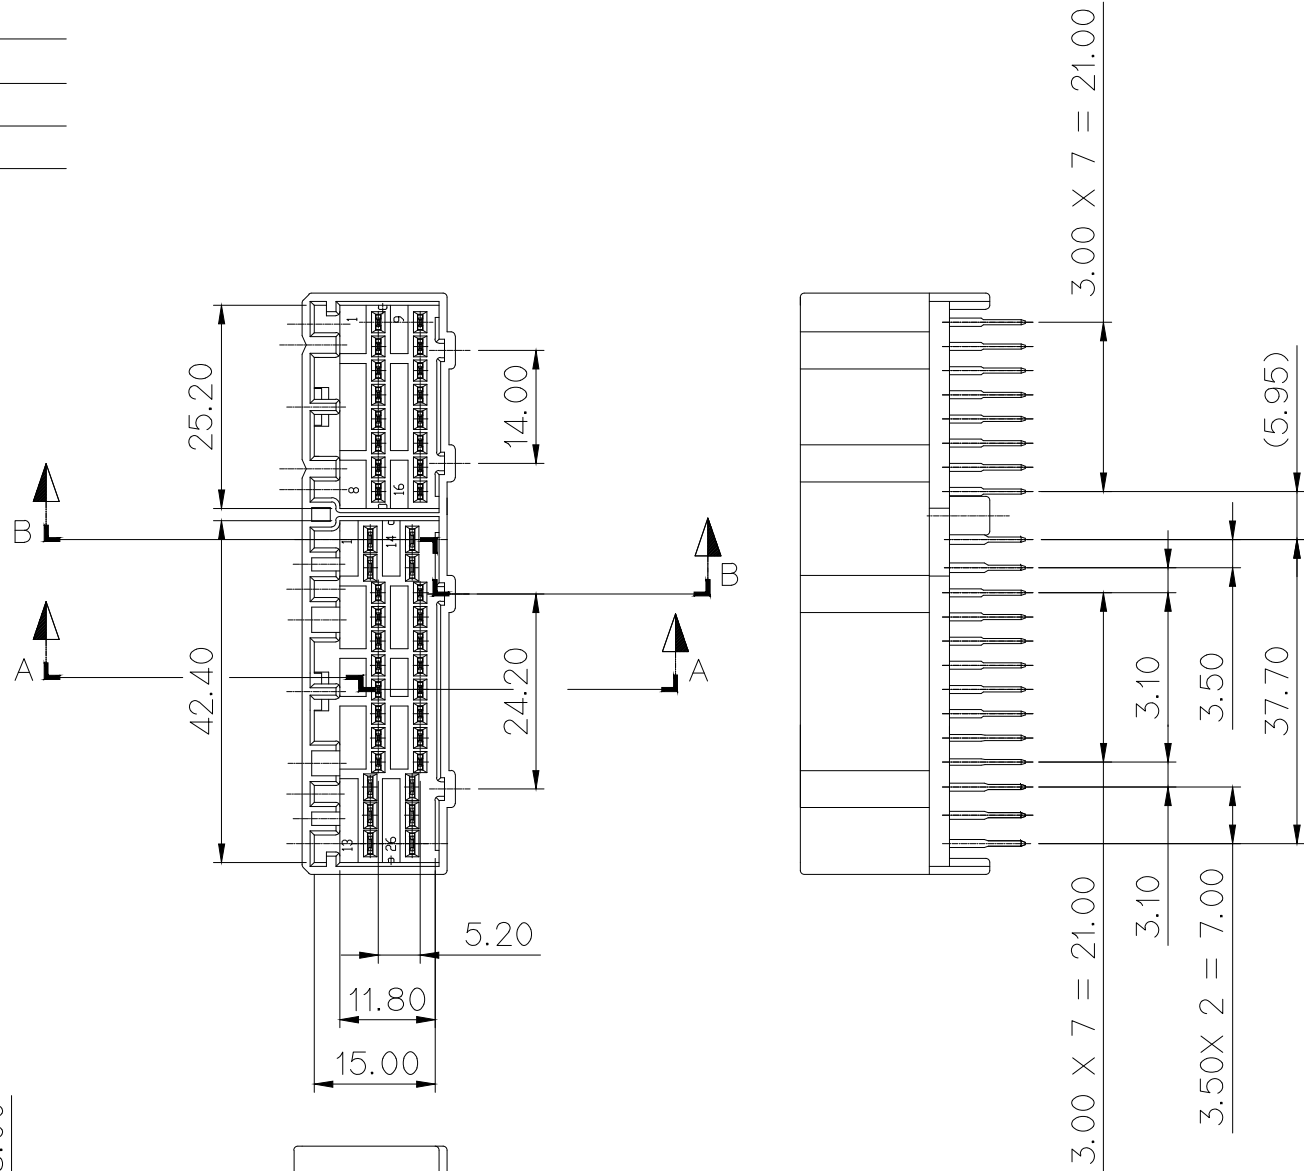

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS
2. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. MATING PLUG HOUSING : MG611336 (26P) , MG611332 (16P)
4. APPLICABLE MOUNTING SCREW : M3 SCREW
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO	PART NAME	MATERIAL	FINISH	Q'TY
①	0407 42M PCB HOUSING(VRT)	PBT+ GF30%	NATURAL	1 EA
②	070 PCB M TERMINAL (VRT)	BRASS	PRE-TIN	10 EA
③	040 PCB M TERMINAL (VRT)	BRASS	PRE-TIN	32 EA

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		SEE TABLE			
					WIRE RANGE		CLASS		HYBRIDE	
					INSULATION		TYPE		.040 .070	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG643911
DR. PSH '07.04.17.			CHK. HSH			PART NAME				
CHK.			APP. KKJ			0407 42M PCB ASSY (VRT)				

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK