
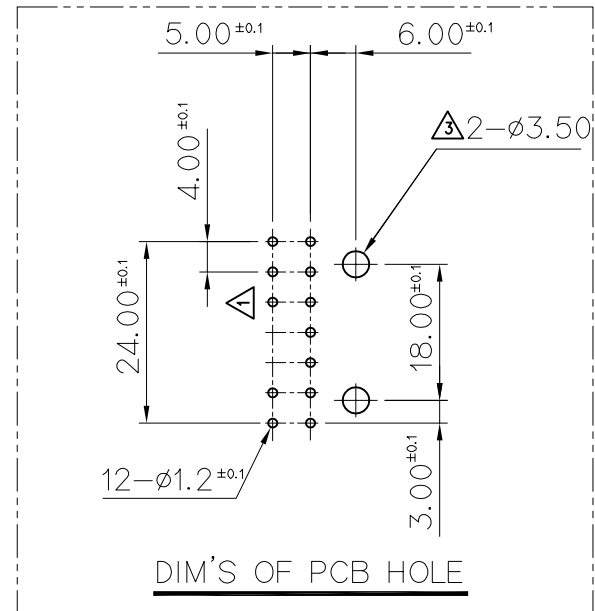
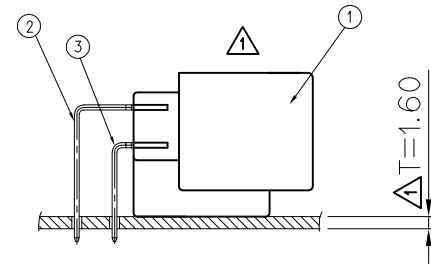
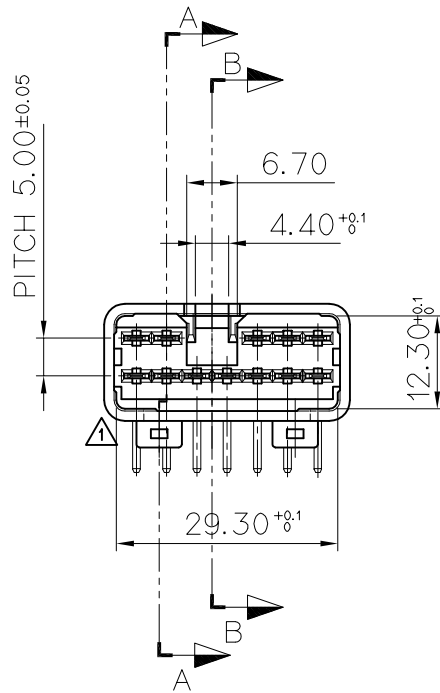
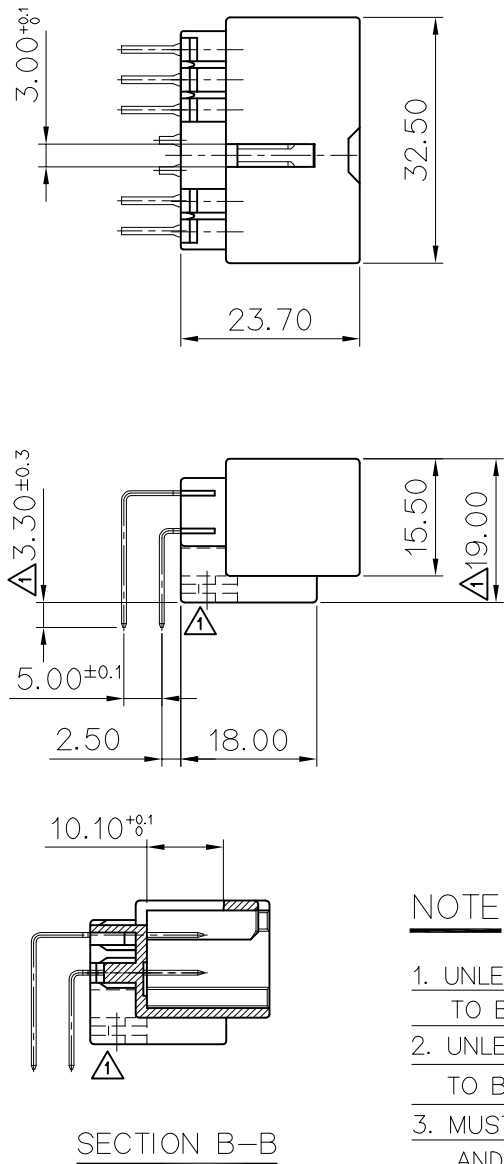


GENERAL TOLERANCE (TERMINAL)						GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	45VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

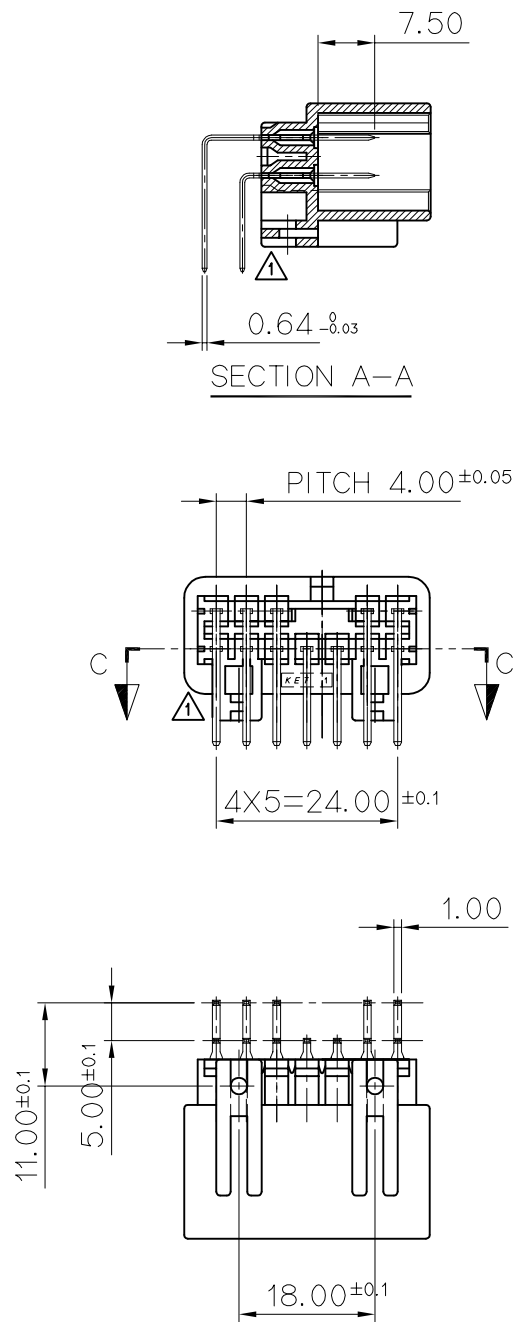

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING :MG651965
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 지시하지 않은 반경 R은 0.5로 한다
2. 지시하지 않은 모따기 C는 0.5로 한다.
3. 기능상 유해한 FLASH, SINK, 미성형등이 없을 것.
4. 적용 HS'G : MG651965
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	PART NAME	MATERIAL	Q'TY		FINISH
			642466	644011	
1	090II PCB 12P HS'G(HZT)	PBT	1	1	NATURAL
2	PCB TAB TERMINAL (XL)	BRASS	5	4	PRE-TIN
3	PCB TAB TERMINAL (M)	BRASS	7	6	PRE-TIN

△ TERMINAL 위치

품 명	품 번	TM'L 위치(표시)	P.C.B. LAYOUT
090II 12M PCB ASSY (HZT)	MG642466		
090II 12M PCB ASSY (HZT 10P)	MG644011		

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
3	설 /변(ECO-1105-313)오기 수정	LSY			'11.05.23.	WIRE RANGE		CLASS
2	설계사양변경(S070204)근거 수정	PSH	4/5	4/7	'07.09.13.	INSULATION		TYPE
1	BRACKET 호환성 개선(재작성)	SHIN	KO	4/8	'02.05.17.	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG642466,MG644011
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		
DR. INO. 01.05.23		CHK. KO. 01.05.23				090 II PCB 12P ASS'Y(HZT TYPE)		
CHK.		APP. CHOSU. 05.23						

ISSUE MARK