
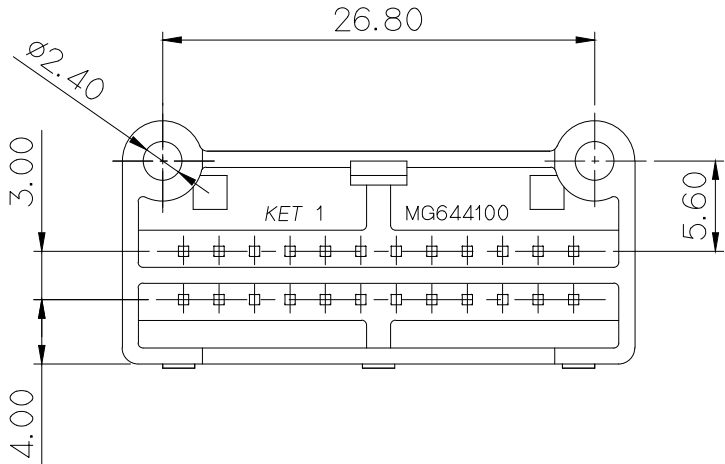
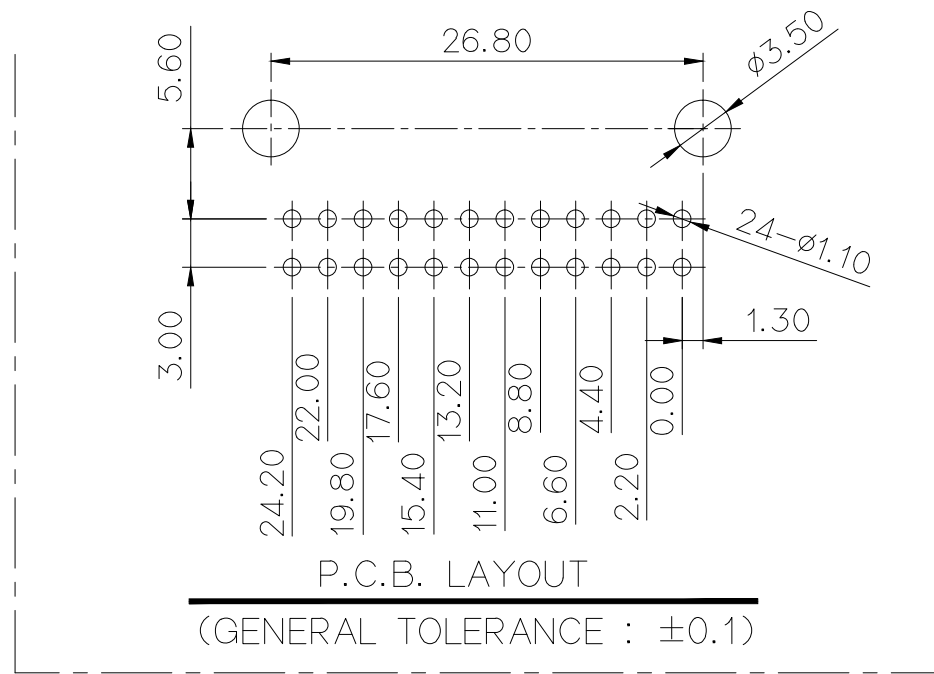
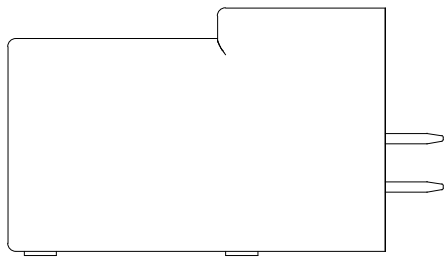
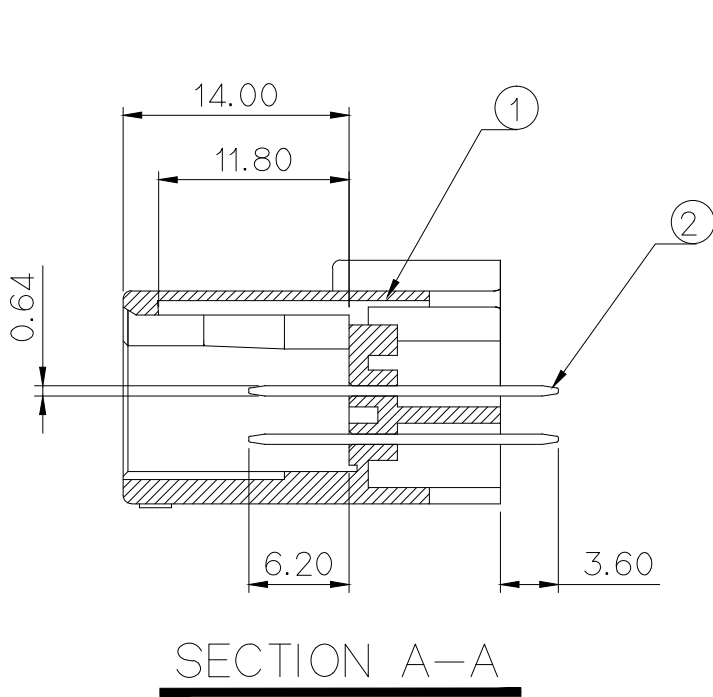
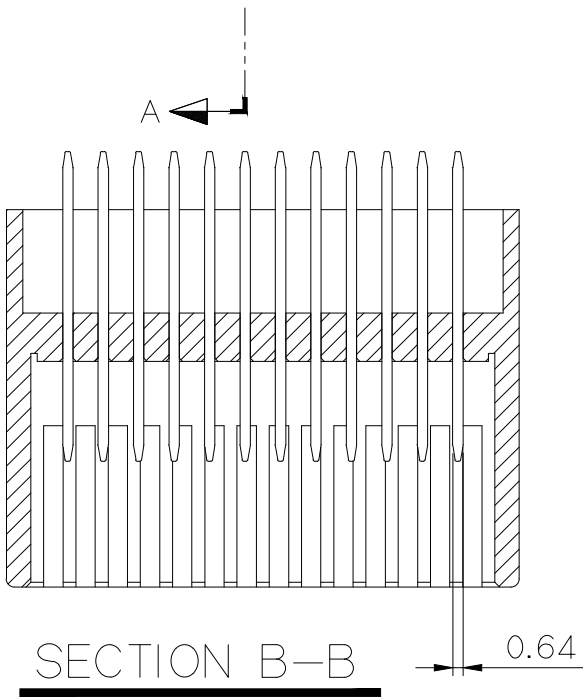



NO.	PART NAME	PART NO	MATERIAL	FINISH	Q'TY
①	025 24M PCB HOUSING	MG674101	PBT+GF10%	NATURAL	1 EA
②	025 PCB BANDOLIER PIN	R602156	BRASS	PRE-TIN	24EA

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

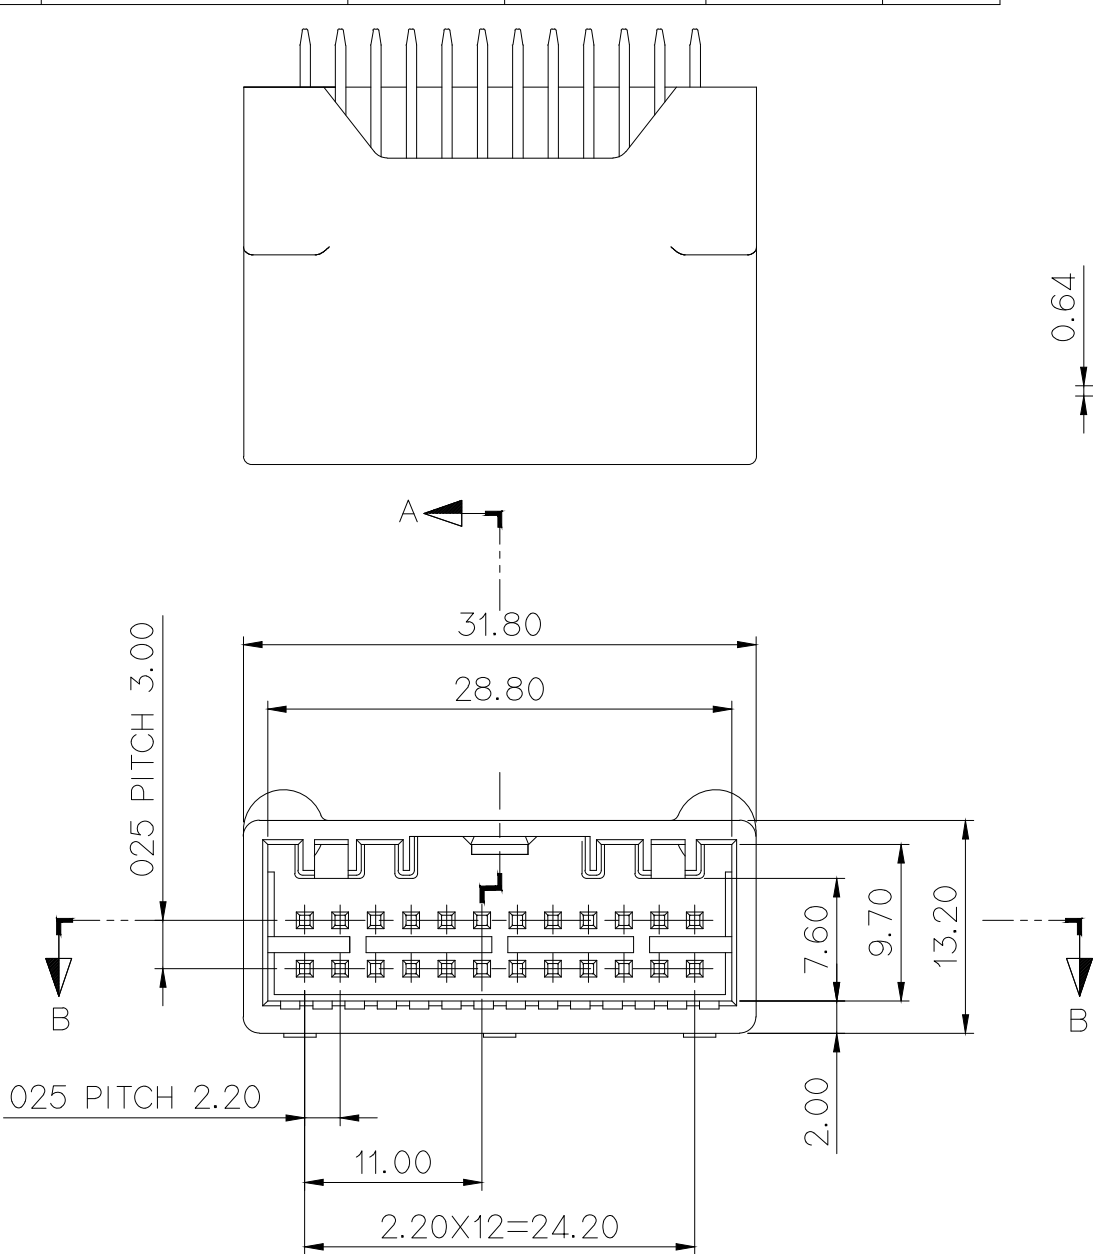


- NOTE
- 1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - 2. APPLICABLE HOUSING : MG654102, MG655761△
 - 3. APPLICABLE MOUNTING SCREW : M3 SCREW
 - 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

- 주 기
- 1.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
 - 2.적용 HOUSING : MG654102, MG655761△
 - 3.적용 BOLT : M3 일반나사
 - 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISO VIEW

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS 025	
						INSULATION		TYPE	
1	ECO-2101-030 근거 도면 변경	LWJ	NKT	SSH	'21.01.05	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG644100
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				
DR.	H.E.M '09.04.01	CHK.	C.W.K '09.04.01			PART NAME			
CHK.		APP.		'09.04.01		025 24M PCB CONNECTOR (VRT)			

APPROVED

2021-11-03

KOREA ELECTRIC TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK