
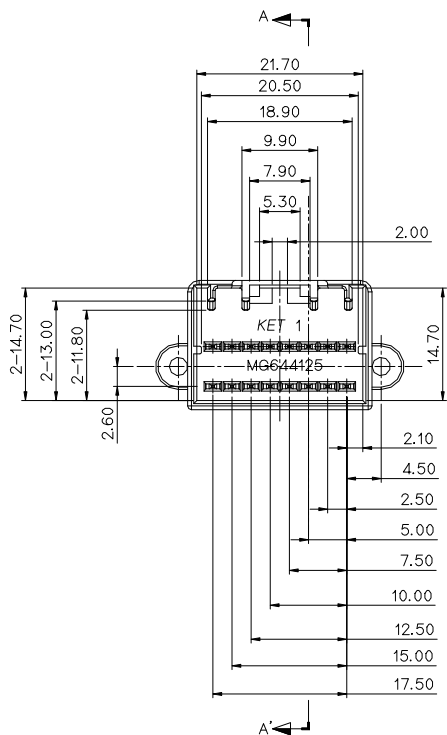



SECTION A-A'

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

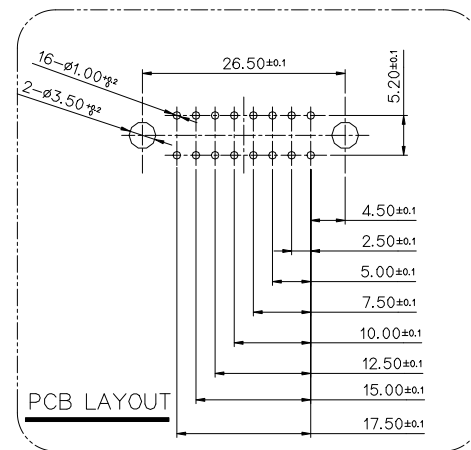

- ~S. ~!_J
1. ~ 5~* 5~3 !~ 5 ^!&^R]? ^K\$^!^5 R^R]? 0.3~ ~) ^3K!\$~\$ _!
 2. 기능상 유해한 BURR 및 변형이 없을것.
 3. 적용 BOLT : M3 일반나사
 4. 적용 FEMALE HOUSING : MG614127
 5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.3 RADIUS.
 2. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
 3. APPLICABLE MOUNTING SCREW : M3 SCREW
 4. APPLICATION FEMALE HOUSING : MG614127
 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

KET 1 MG644125		KET 1 MG645763	
PART NO.	COLOR	PART NO.	COLOR
MG644125	SEE TABLE	MG645763	△ LIGHT GRAY

NO.	PART NAME	PART NO.	MATERIAL	FINISH	MG644125 Q'TY	MG645763 Q'TY
①	040II 16M PCB HOUSING (VRT)	MG674126	PBT	SEE TABLE	1 EA	—
		MG675928	PBT	△ LIGHT GRAY	—	1 EA
②	040III PCB TAB TM'L(16.80mm)	ST792158-3	BRASS	PRE-TIN	16 EA	—
		ST792520-2	BRASS	SN 후도금	—	16 EA

				MATERIAL	SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	SEE TABLE		
				WIRE RANGE		CLASS 040II	
				INSULATION		TYPE	
				TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG644125 △MG645763
				DR. CDH 08.06.04	CHK. 06.04	PART NAME	
				CHK. 06.04	APP. 06.04	040II 16M PCB ASS'Y (VRT-B-TYPE)	