

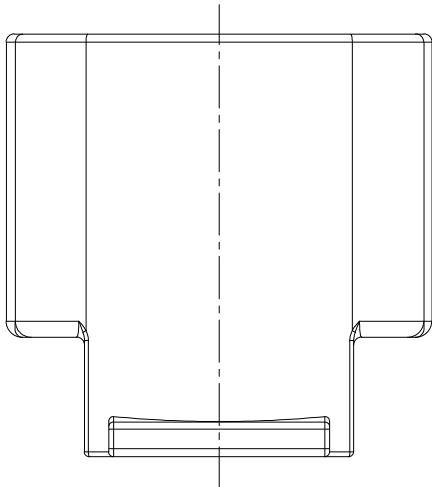
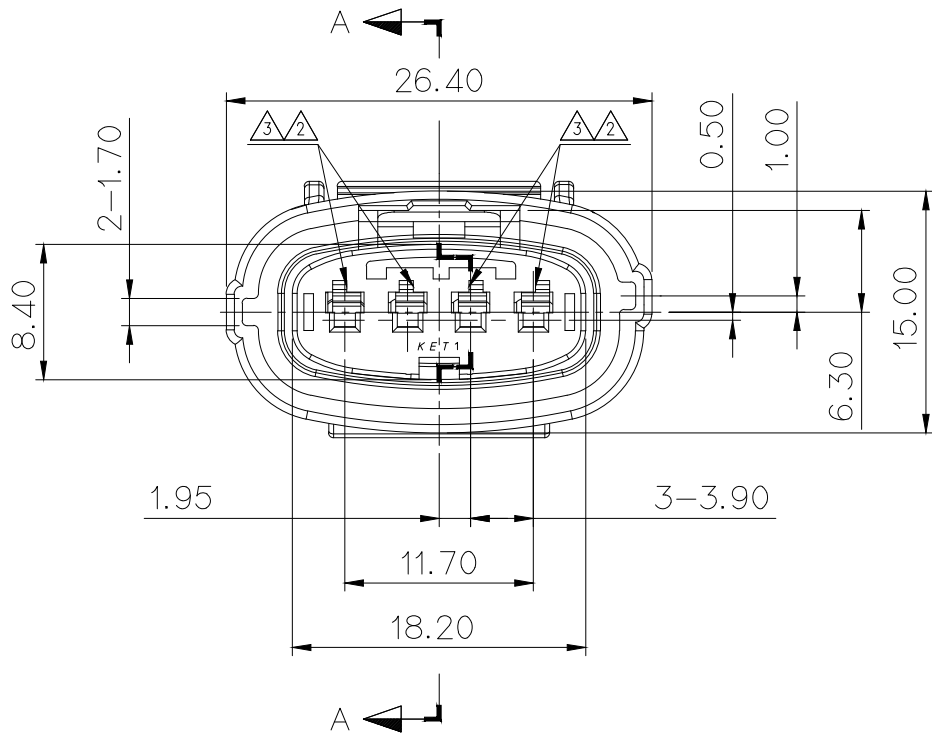
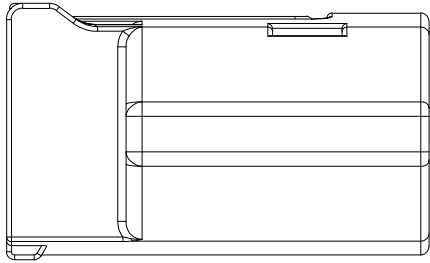
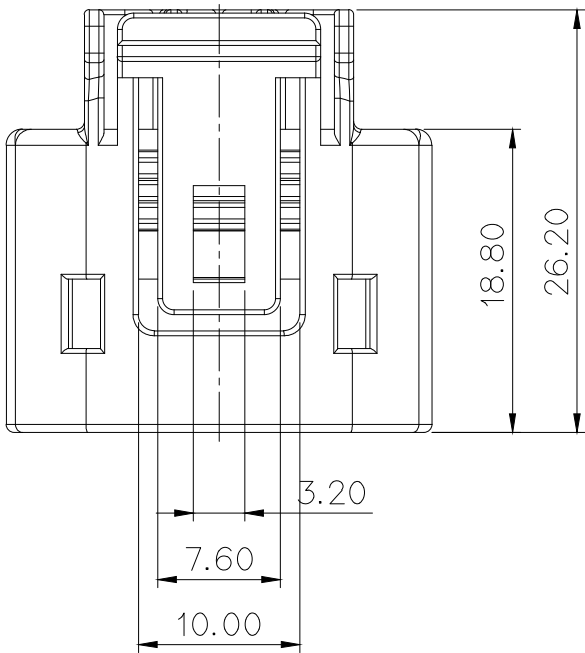
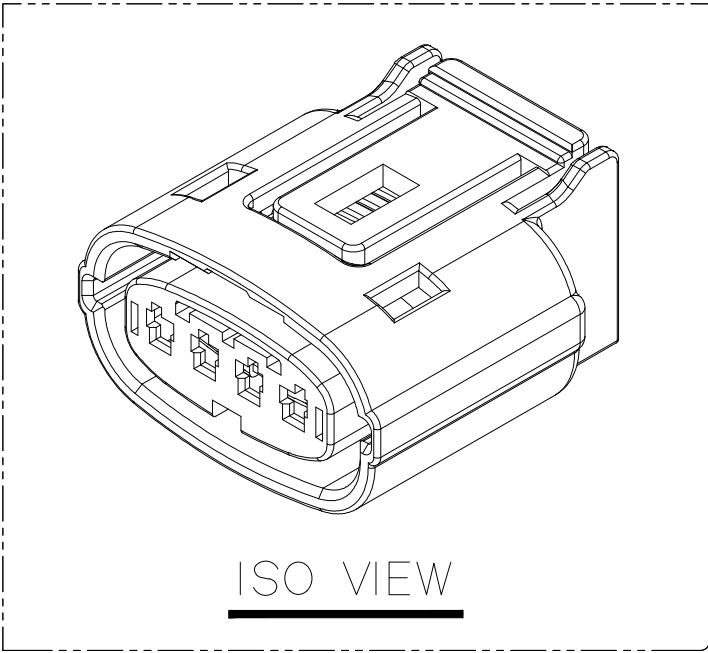


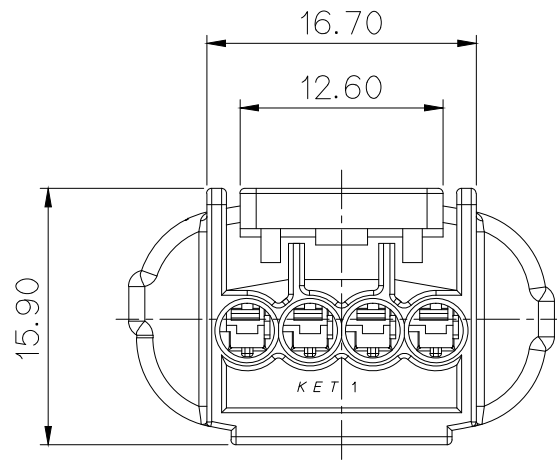

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730924,730925
APPLICABLE WIRE SEAL : MG682620,682621
APPLICABLE DUMMY SEAL : MG682622
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HAXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCEIBED UNDER EU ELV DIRECTIVE&RoHS REGULATION

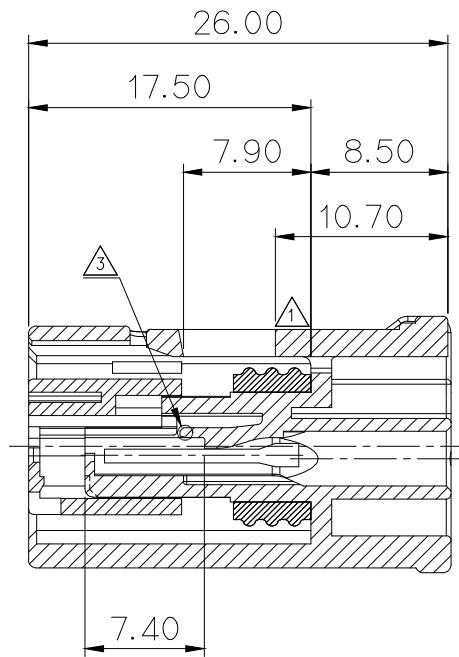

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730924,730925
적용 WIRE SEAL : MG682620,682621
적용 DUMMY SEAL : MG682622
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 농도를 초과해서는 안된다.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG674141	040 WP 4F HOUSING	PBT	BLACK
②	MG674142	040 WP 4F F/HOLDER	PBT	NATURAL
③	R602160	040 WP 4F I/SEAL	SILICONE	RED



ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	040
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG644145-5
								PART NAME	
								040 WP 4F ASSY	