

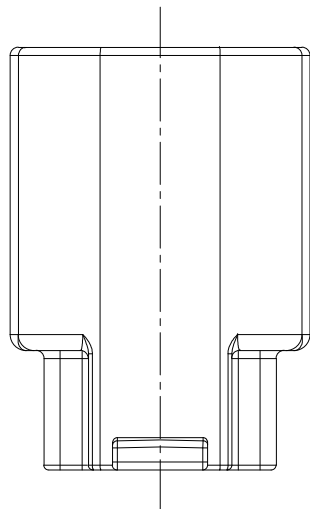

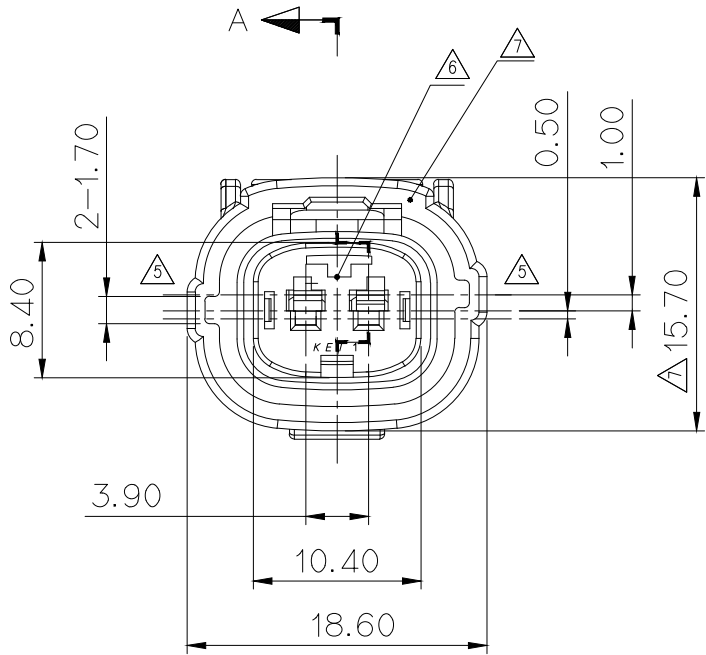
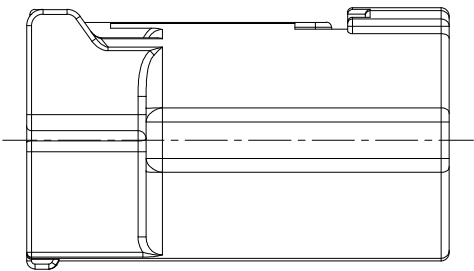
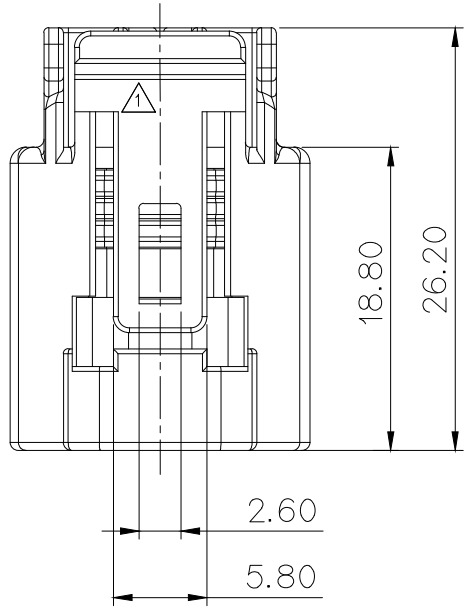


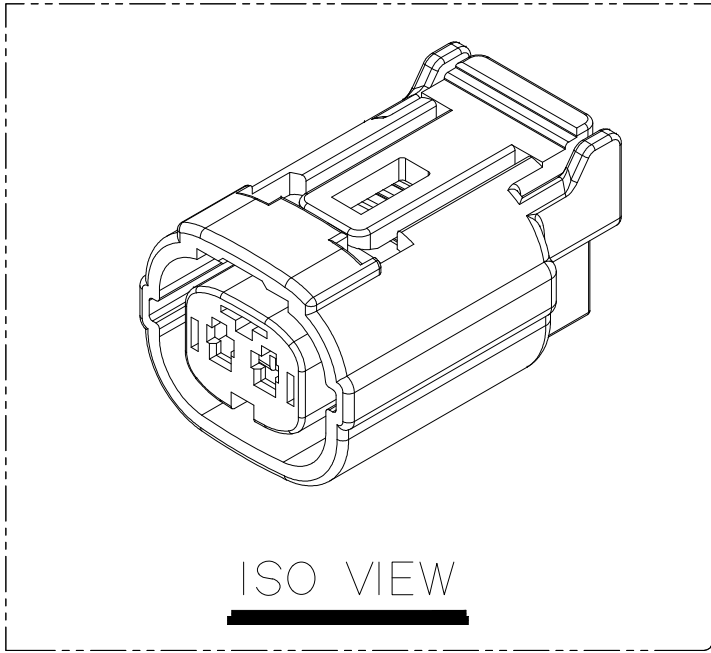


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730924,730925
APPLICABLE WIRE SEAL : MG682620,682621
APPLICABLE DUMMY SEAL : MG682622
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HAXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCEIBED UNDER EU ELV DIRECTIVE&RoHS REGULATION

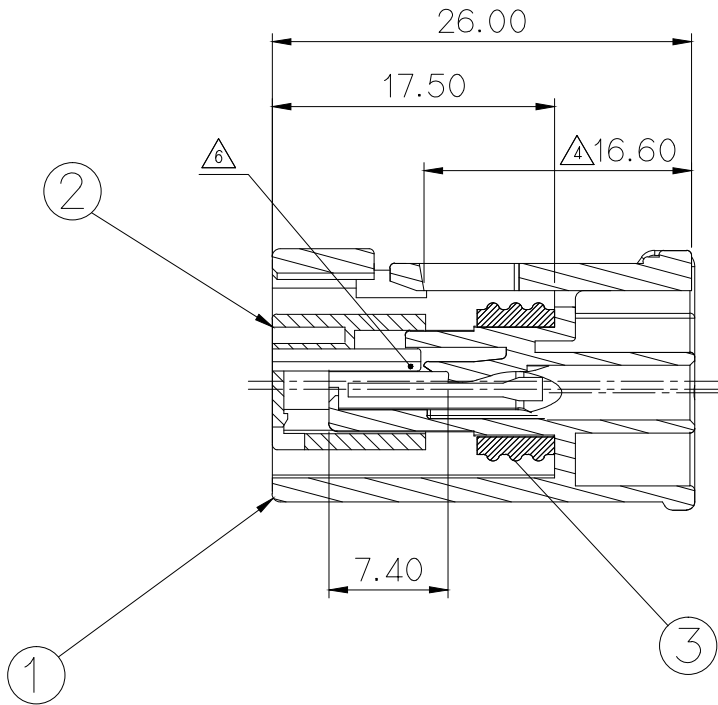

SECTION A-A

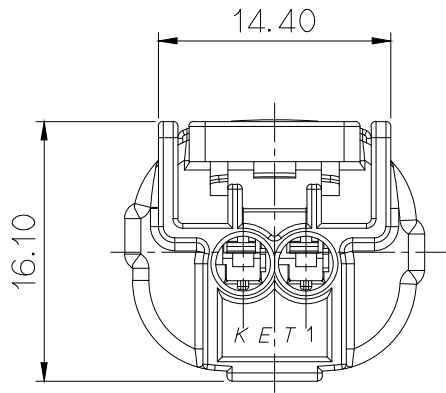

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG674143	040 WP 2F HOUSING	PBT	BLACK
②	MG674144	040 WP 2F F/HOLDER	PBT	NATURAL
③	R602161	040 WP 2F I/SEAL	SILICONE	RED

⑦	ECO-1612-189 근거 도면 재작성	YTK CJH		LSY	'16.12.14
⑥	ECO-1606-095 근거 도면 재작성	JY.K CSH		LSY	'16.06.09
⑤	ECO-1507-090 근거 도면 재작성	KCS CKY		LSY	'15.07.15
④	ECO-1403-200 근거 도면 재작성	KJH CSH	CWK	HJB	'14.03.25
③	ECO-1306-090 근거 도면 재작성	KJH CSH		HSH	'13.06.17
②	ECO-1306-048 근거 도면 재작성	KJH CSH		HSH	'13.06.11
①	ECO-1304-152 근거 도면 재작성	YM.K CSH		HSH	'13.04.29
LTR	REVISION RECORD	DR. CHK.	CHK.	APP.	DATE
DR.	HKS 2010.01.07	CHK.			
CHK.	HSH 2010.01.07	APP. KJ 2010.01.07			

MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
FINISH		SEE TABLE		
WIRE RANGE		CLASS		040
INSULATION		TYPE		
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG644146
PART NAME				
040 WP 2F ASSY				

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730924,730925
적용 WIRE SEAL : MG682620,682621
적용 DUMMY SEAL : MG682622
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 농도를 초과해서는 안된다.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK