

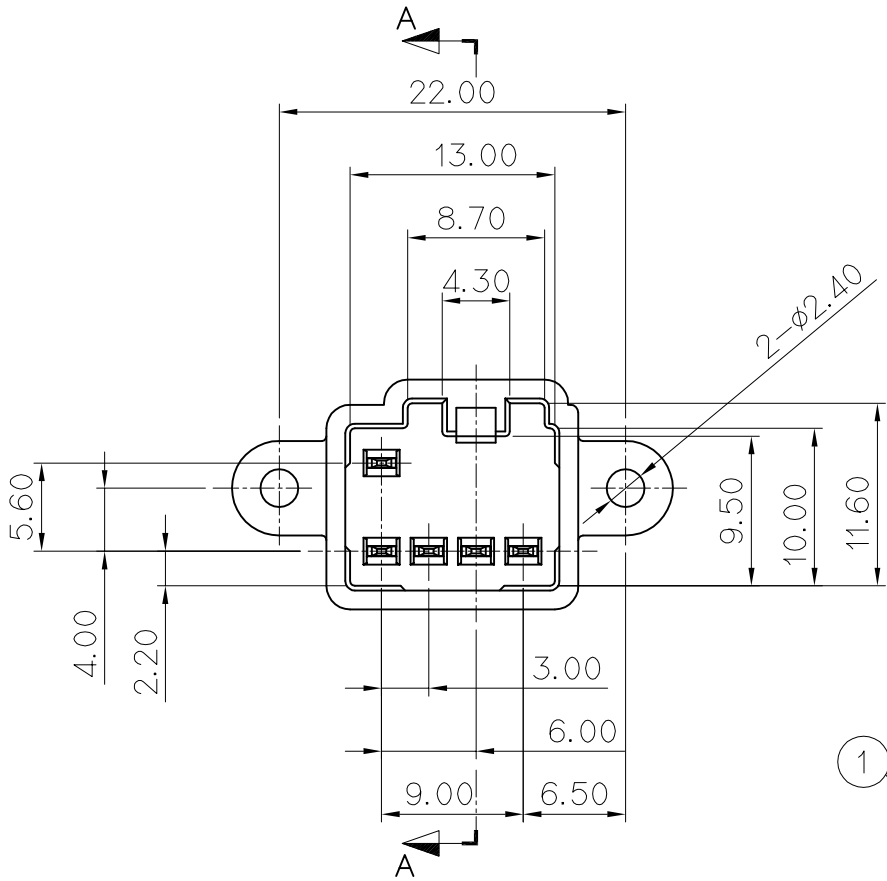
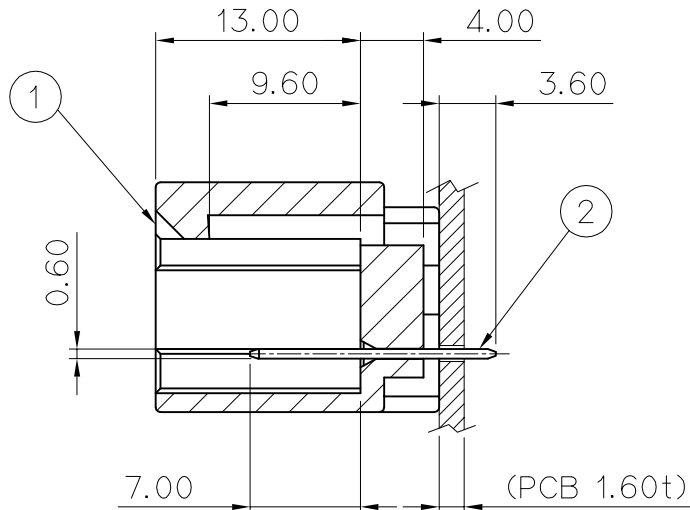


GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

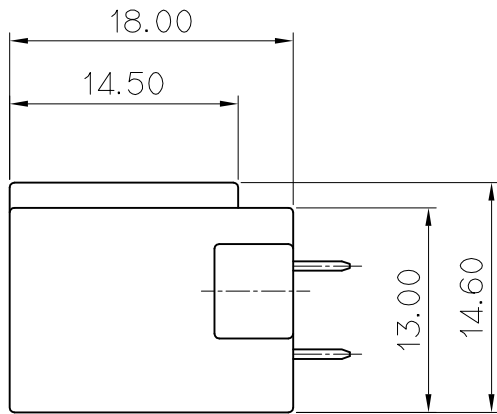


TERMINAL 위치

품 명	품 번	TM'L 위치(■ 표시)	P.C.B. LAYOUT
050 5M PCB ASSY (VRT)	MG644352		
050 5M PCB ASSY (VRT-2P)	MG644381		

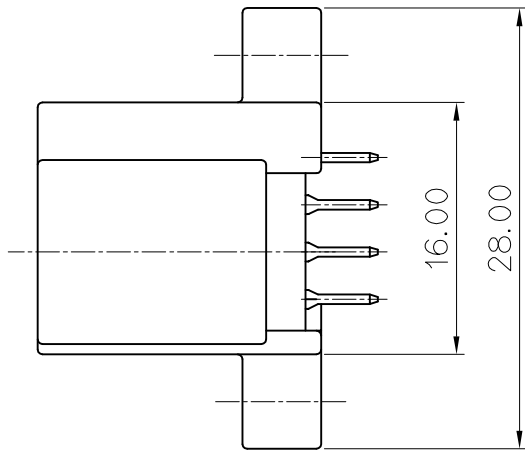

SECTION A-A

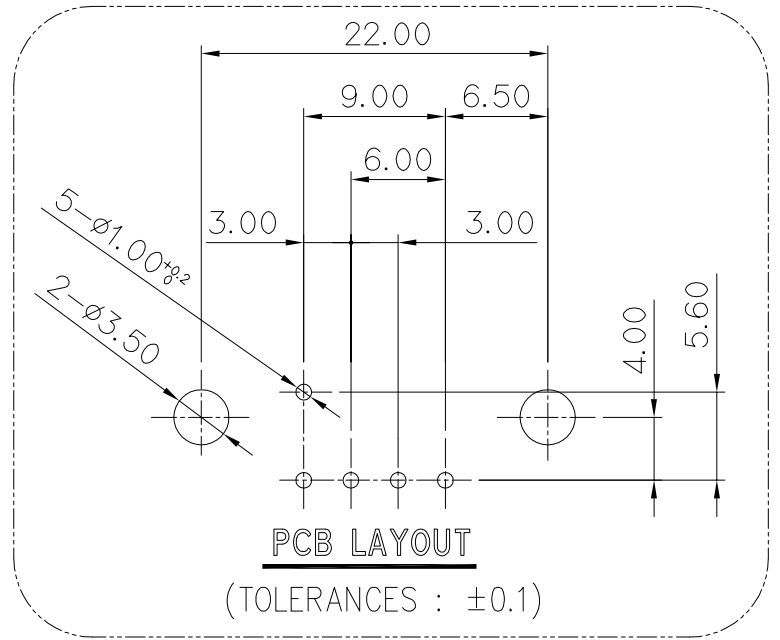

주 기

- 1.지시하지 않은 반경 R은 0.3로 한다
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 FEMALE HS'G: MG614354
- 5.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE FEMALE HS'G: MG614354
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

NO.	PART NAME	PART NO.	MATERIAL	MG644352		MG644381	
				FINISH	QTY.	FINISH	QTY.
①	050 5M PCB HOUSING(VRT)	MG674353	PBT+G/F10%	NATURAL	1	NATURAL	1
②	050 PCB MALE TERMINAL(S)	ST792224	BRASS	PRE-TIN	5	PRE-TIN	2

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE		CLASS		
					INSULATION		TYPE 050		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG644352 MG644381
DR. YSW '08.07.09			CHK.			PART NAME 050 5M PCB ASSY (VRT)			
CHK.			APP.			050 5M PCB ASSY (VRT-2P)			