

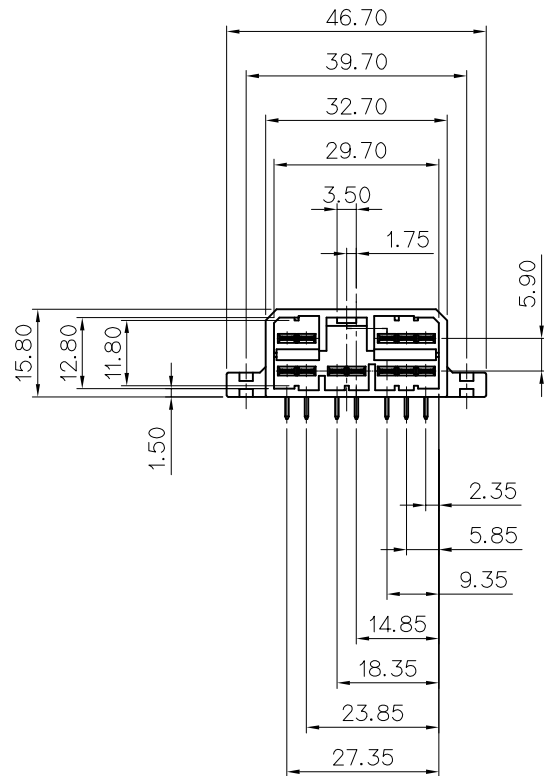
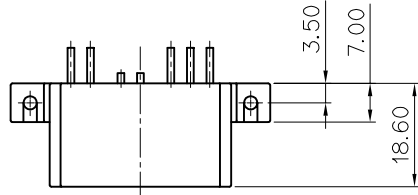


ISO VIEW



NOTE


1. UNLESS OTHERWISE SPECIFIED ALL R TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICATION FEMALE HOUSING: MG614475
- △4. APPLICABLE MOUNTING SCREW : M3.0 SCREW
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



주 기

1. 지시하지 않은 반경 R은 0.5로 한다
2. 기능상 유해한 BURR 및 변형이 없을 것.
3. 적용 FEMALE HOUSING: MG614475
- △4. 적용 BOLT : M3.0 일반나사
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		

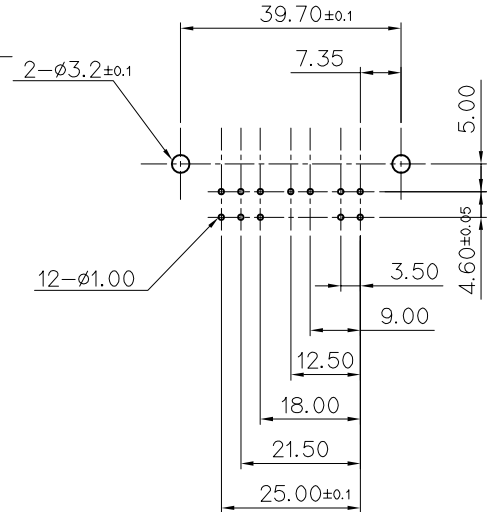PCB LAYOUT
(SCALE 1:1)

NOTE : PCB THICKNESS : 1.6 ±0.1



NO.	PART NO.	PART NAME	MATERIAL	FINISH	QT'Y
1	MG674474	070 PCB 12M HOUSING(HZT)	PBT	NATURAL	1 EA
2	ST792210-3	070 PCB M TERMINAL (L)	BRASS	PRE-TIN	5 EA
3	ST792211-3	070 PCB M TERMINAL (S)	BRASS	PRE-TIN	7 EA

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	SEE TABLE				
						WIRE RANGE			CLASS		
						INSULATION			TYPE		
	설계사양변경(S100163) 근거에 의거					10.06.29					
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO.	MG644473
DR.	KMH 09.04.22			CHK.				PART NAME			
CHK.	 09.04.22			APP.			09.04.22	070 12M PCB ASSY (HZT)			