

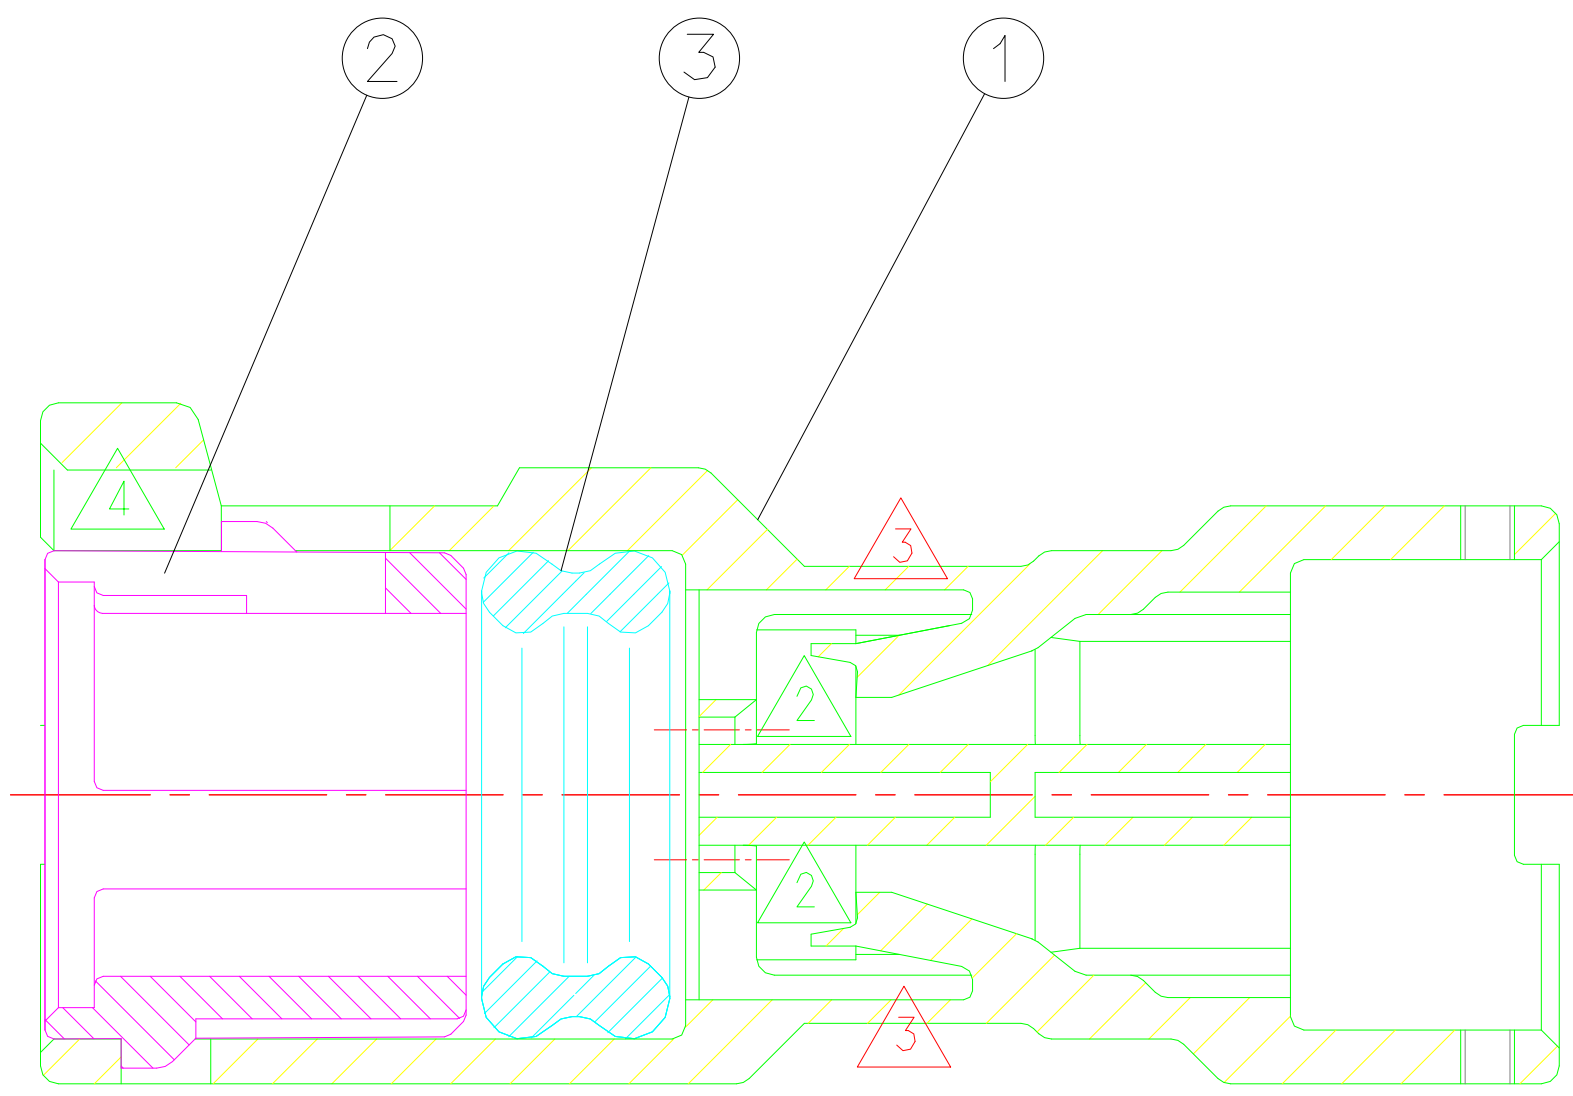





NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG674484	SP WP 6M HOUSING (58V)	PBT	GRAY
②	MG674485	SP WP 6M F/HOLDER (58V)	PBT	NATURAL
③	R602213	SP WP 6M I/SEAL (58V)	SILICONE	RED

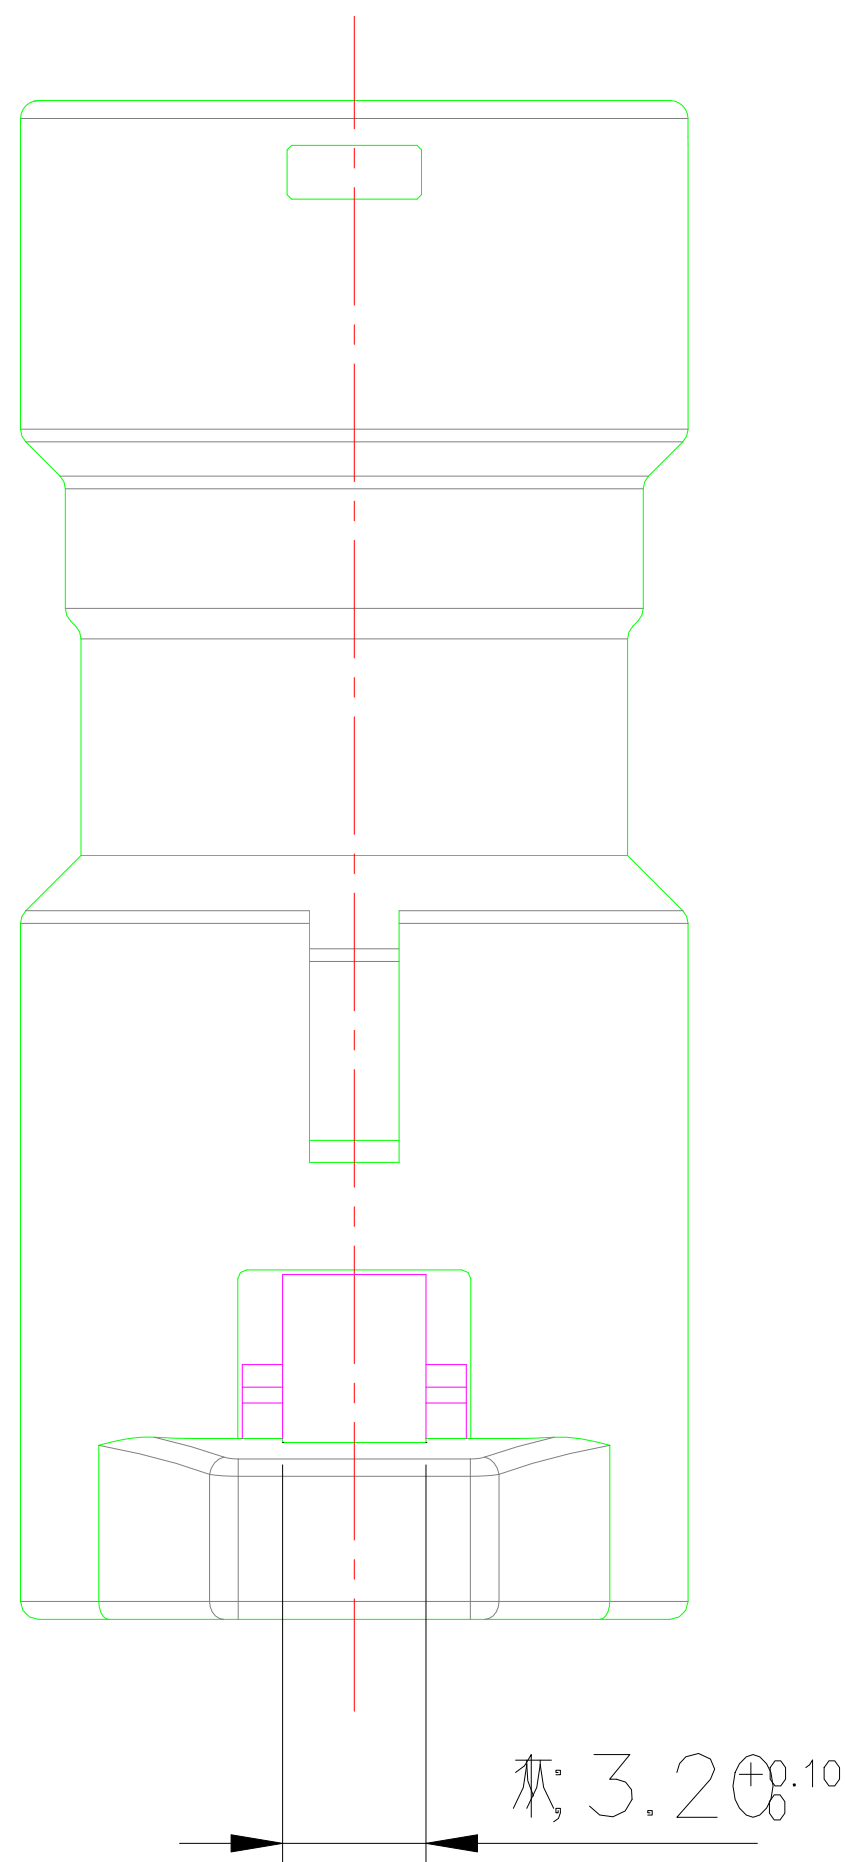

SECTION A-A

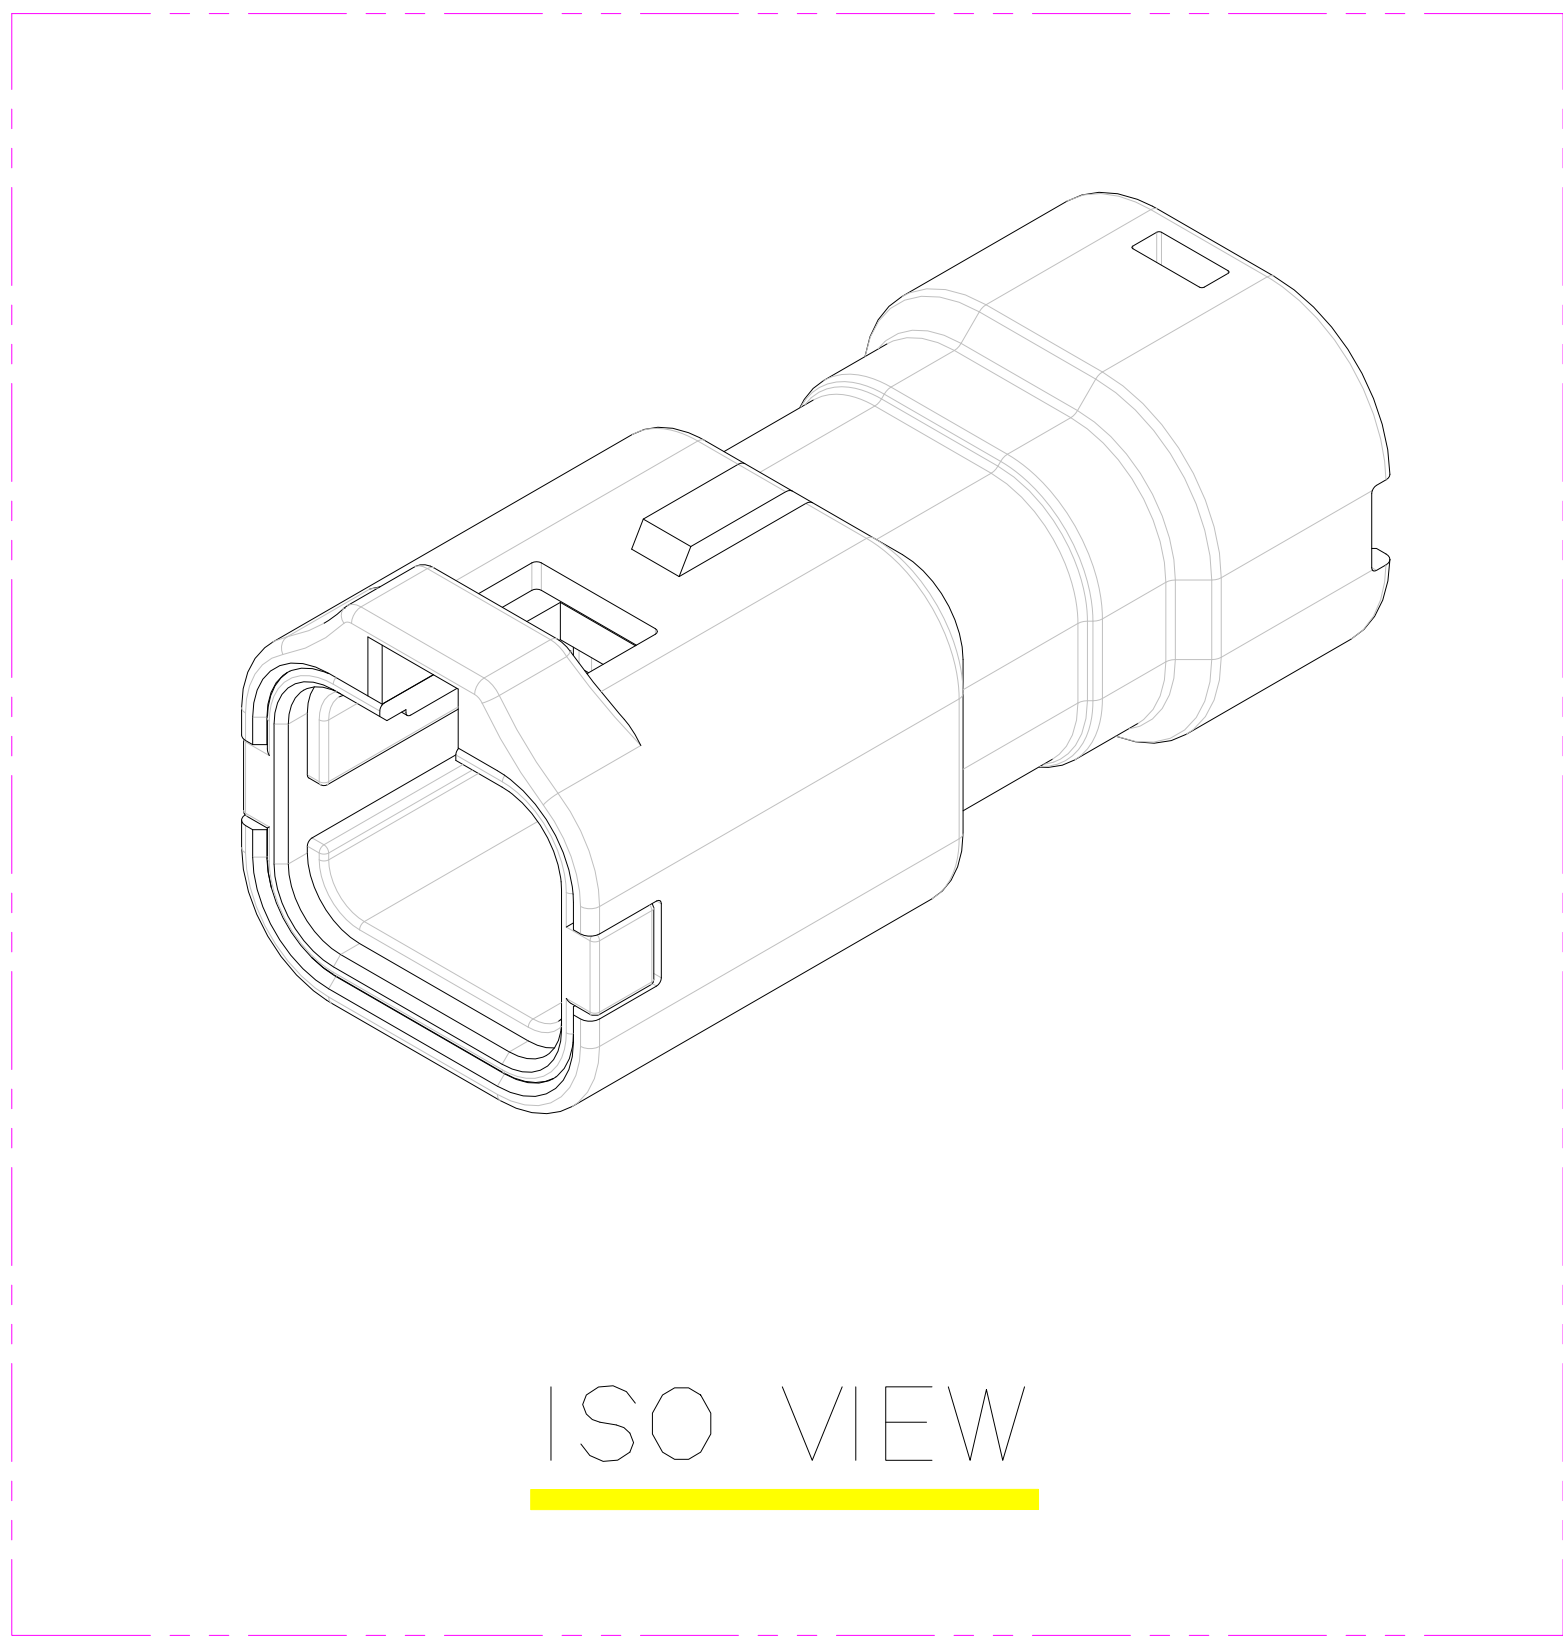

ISO VIEW

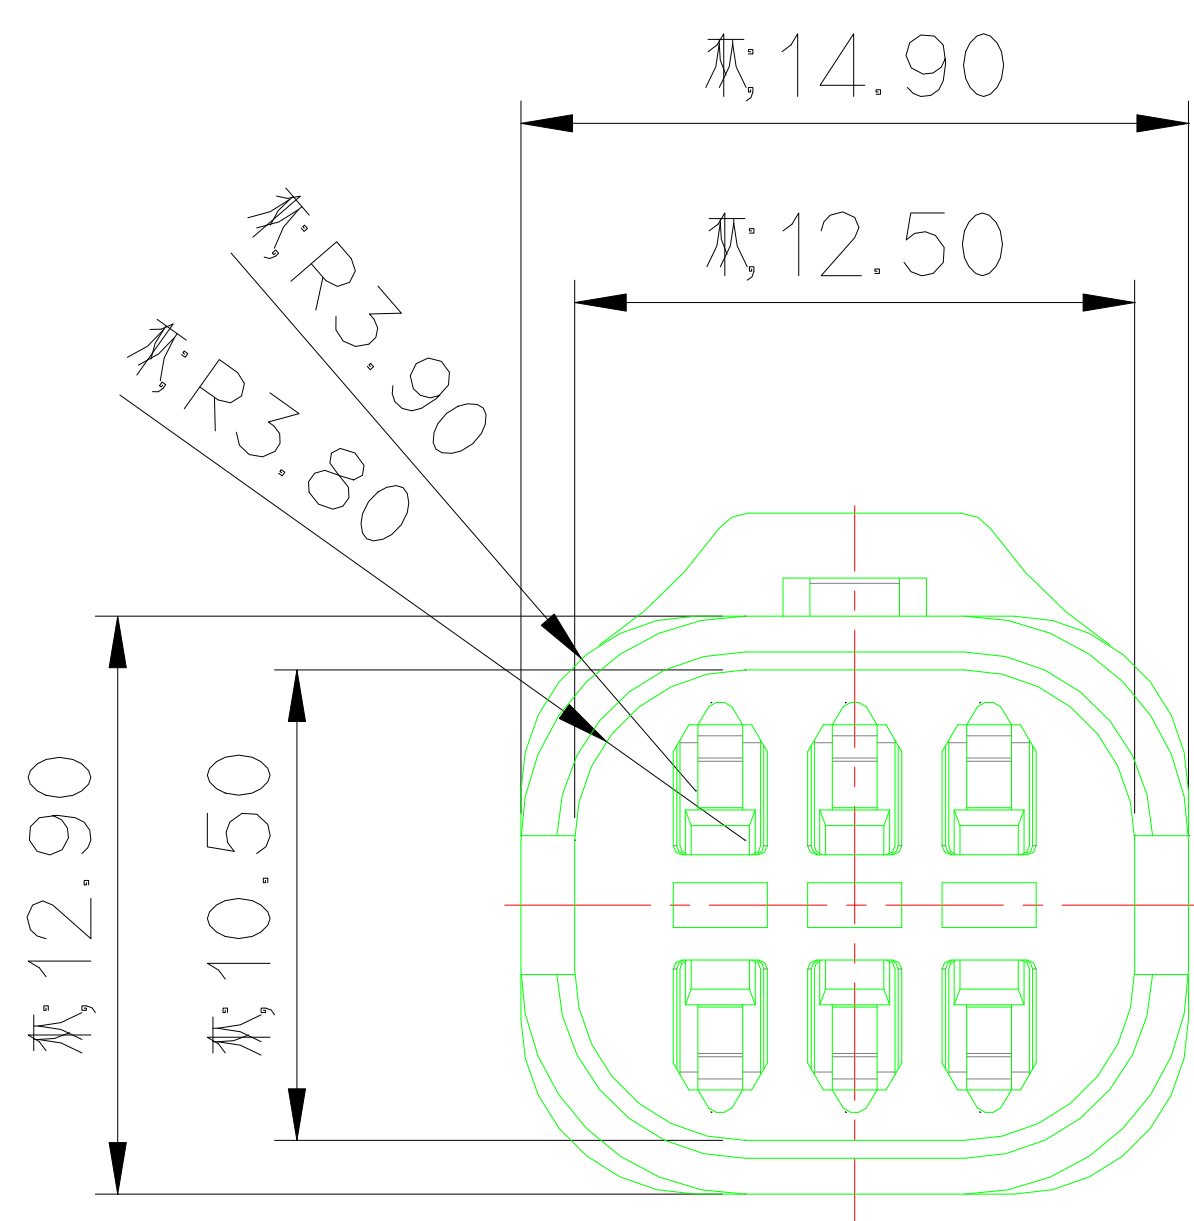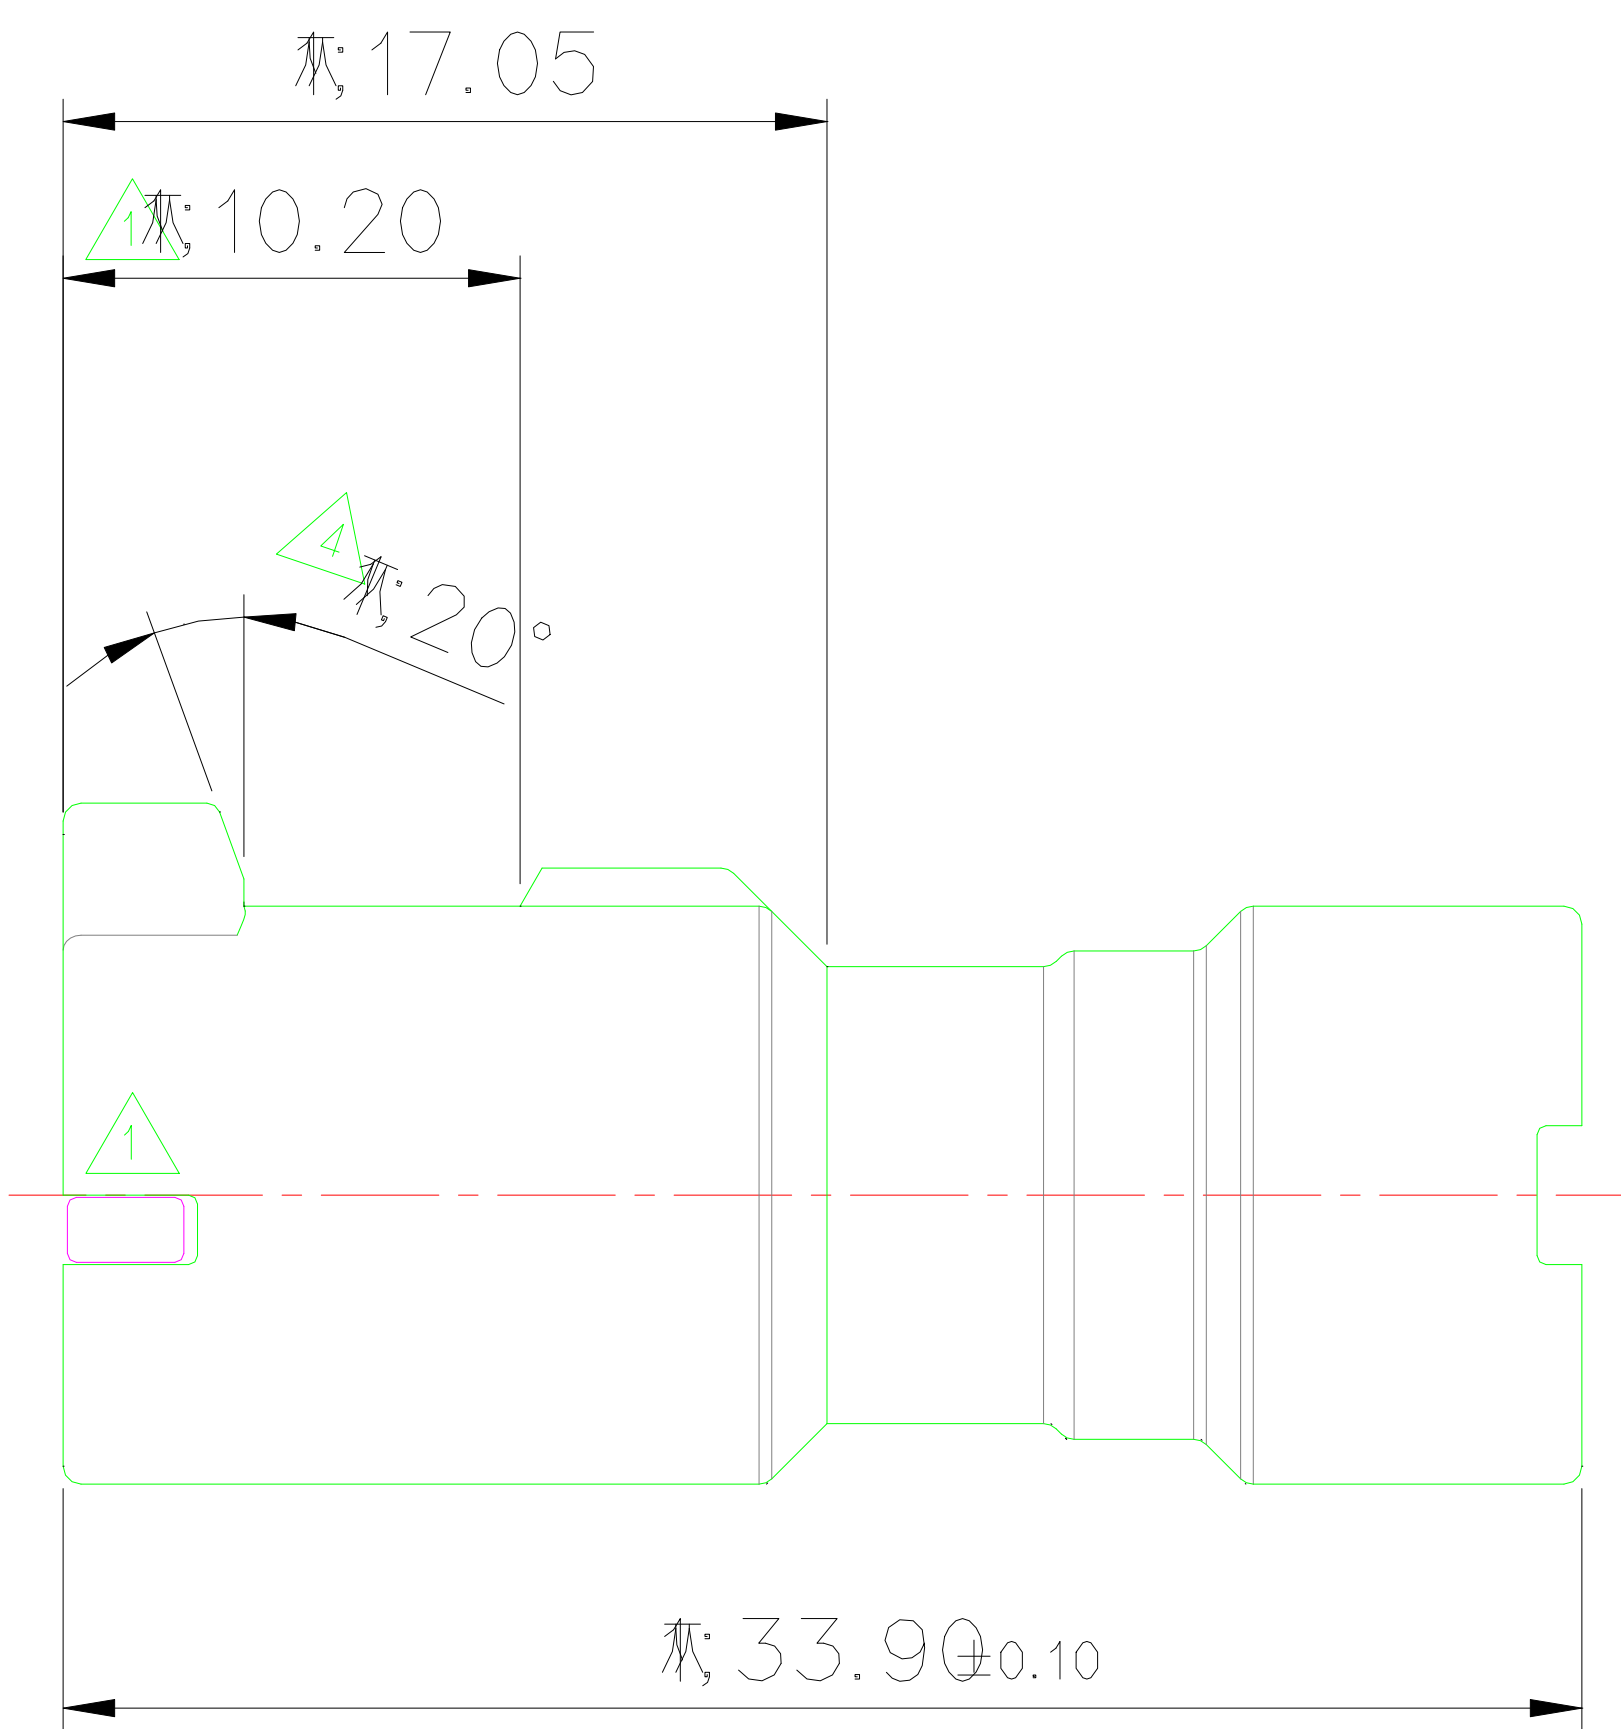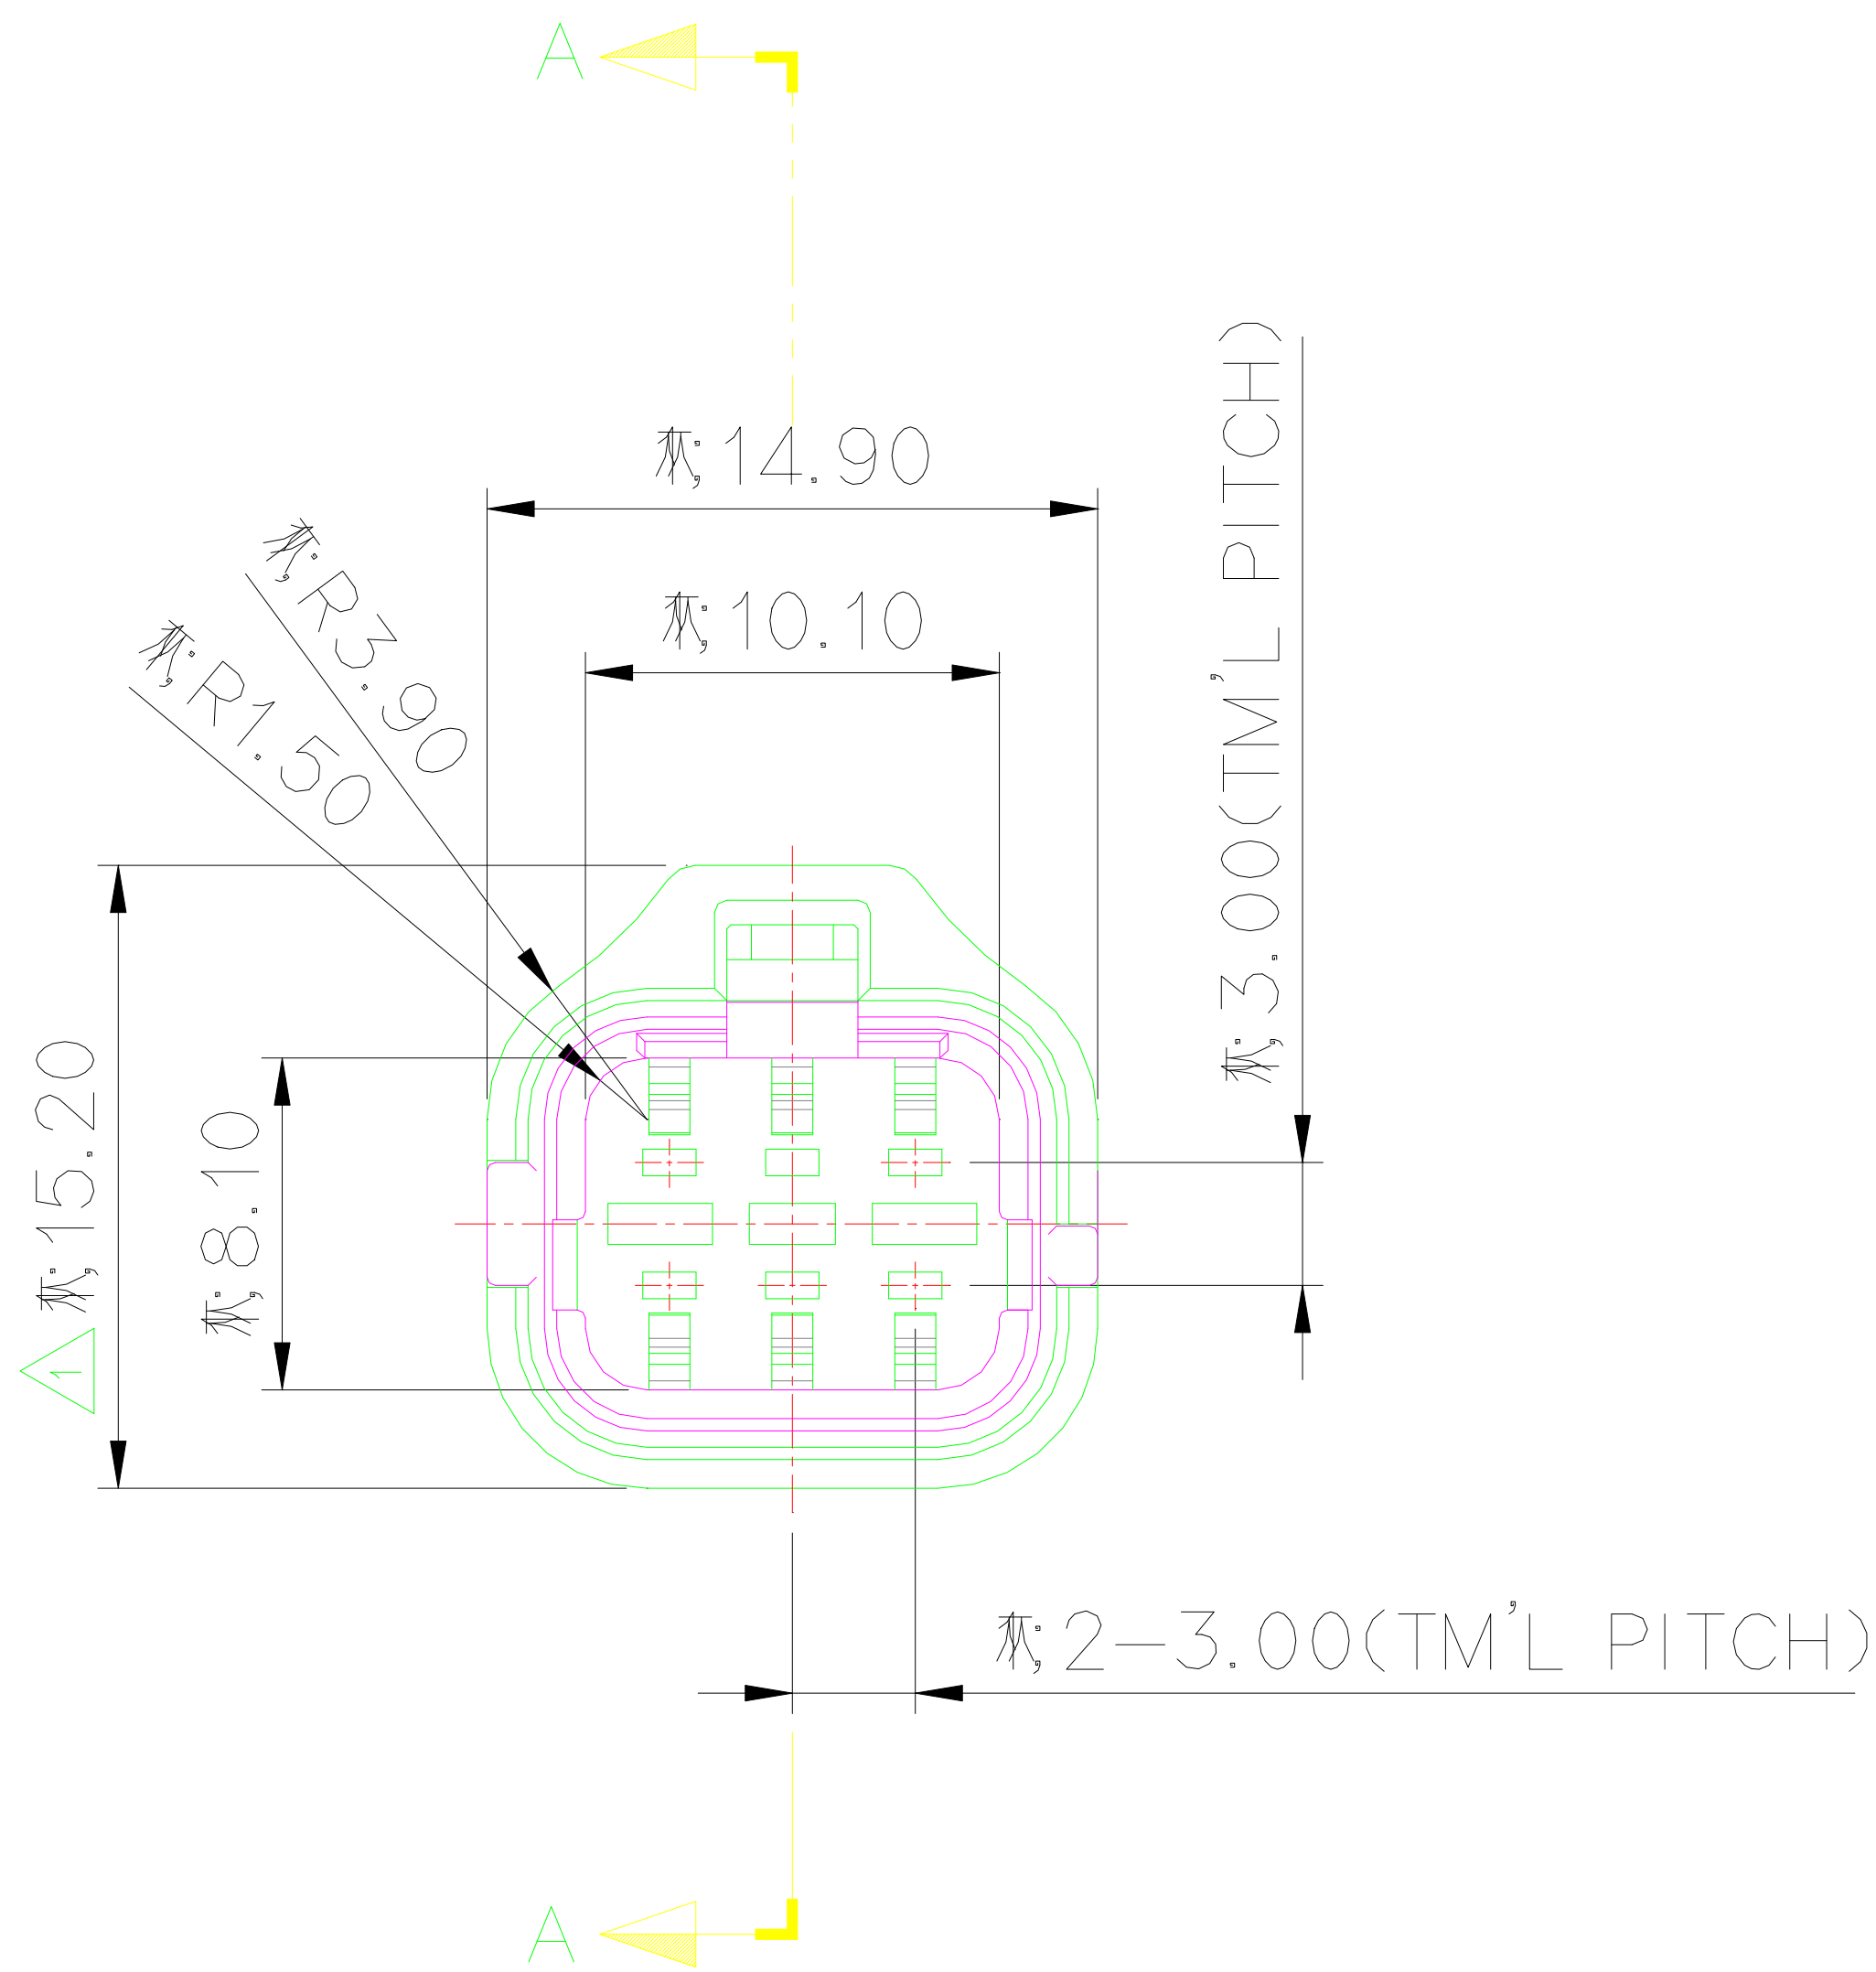

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : ST741138
적용 R/HOLDER : MG634131

2적용 REAR SEAL

: MG684132(4P)/684133(6P) (AEXF 0.3~0.5)

적용 REAR SEAL

: MG685230(4P)/685231(6P) (AVSS 0.3~0.5)

3. 적용 HOUSING : MG614130

- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST741138
APPLICABLE R/HOLDER : MG634131

2APPLICABLE REAR SEAL

: MG684132(4P)/684133(6P) (AEXF 0.3~0.5)

APPLICABLE REAR SEAL

: MG685230(4P)/685231(6P) (AVSS 0.3~0.5)

3. APPLICABLE HOUSING : MG614130

- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM,HEXAVALENT CHROMIUM, PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

ISSUE MARK

4	ECO-1208-024 근거 도면 재작성 (HS'G LOCK 강도 개선)	HSR		12.08.06	MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
	ECO-1107-161 근거 도면 재작성 (TM'L 삽입성 개선)	SSH	JYS	11.07.11	FINISH	SEE TABLE	
2	설계사양변경(S110120)근거 형상 변경	SHS		11.04.26	WIRE RANGE		CLASS SP
1	설계사양변경(S090248)근거 재작성 (HS'G LOCK 강도 및 HOLDER 역삽입 개선)	KHS		09.08.31	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1
DR.	H.S.KIM	09.03.25	CHK.		09.03.25	PART NAME	PART NO. MG644483
CHK.		09.03.25	APP.		09.03.25	SP WP 6M ASSY (58V)	