
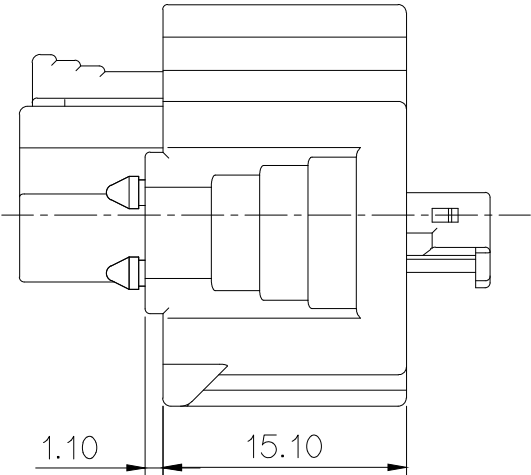
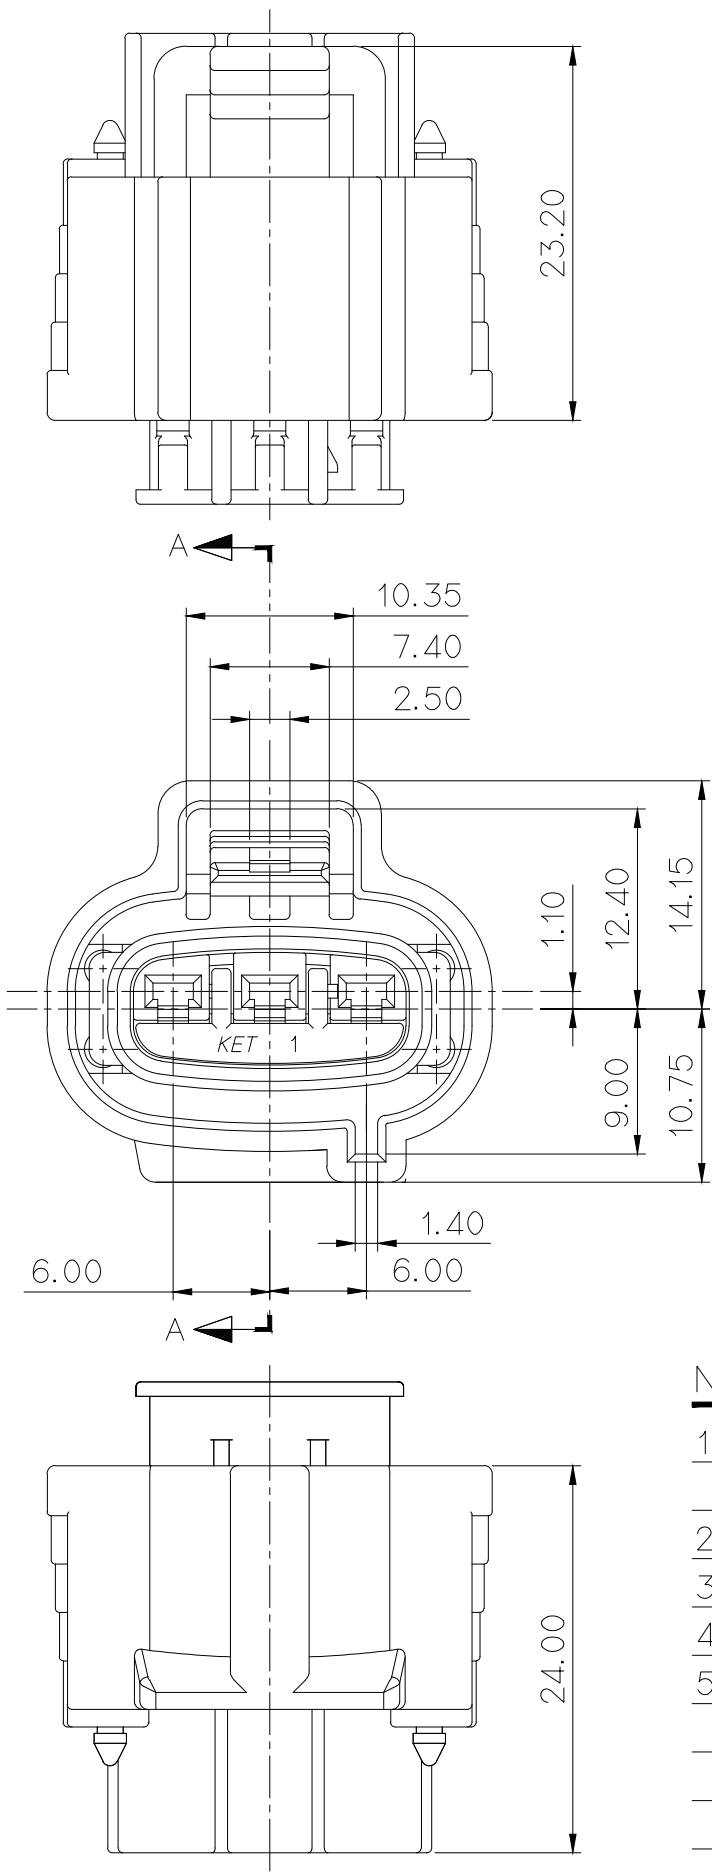



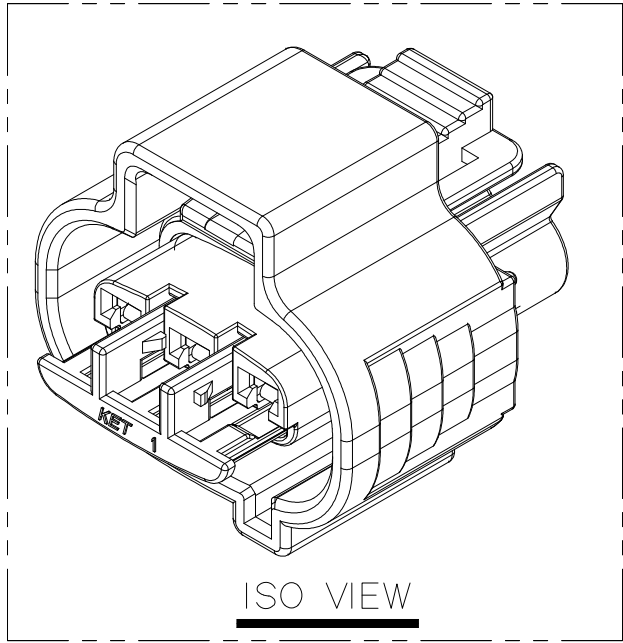


NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
△ * 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- F/HOLDER는 1차 LOCK 상태로 유지, 공급할 것.
- 적용 TERMINAL : ST730623-3, 624-3, 625-3
- 적용 WIRE SEAL : MG681114, 1115, 1116
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

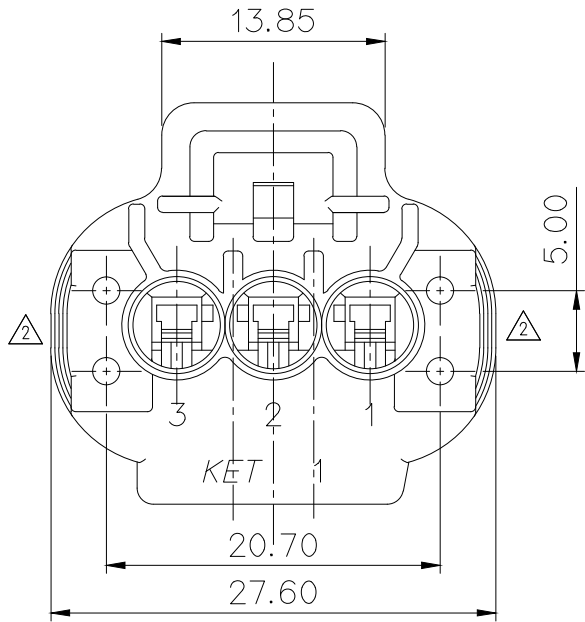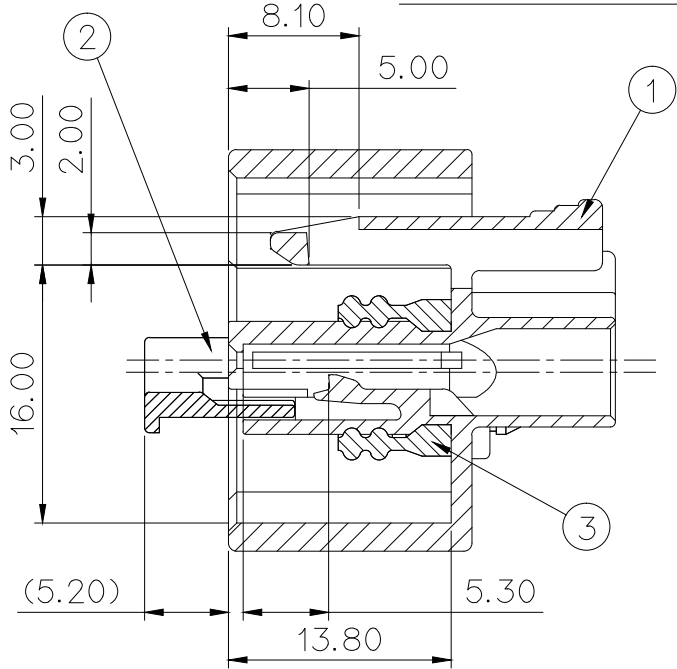

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- FRONT HORDER IS SUPPORT WITH THE 1st LOCK CONDITOIN.
- APPLICABLE TERMINAL : ST730623-3, 624-3, 625-3
- APPLICABLE WIRE SEAL : MG681114, 1115, 1116
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

NO.	PART NO.	PART NAME	MATERIAL	FINISH
①	MG674553	090 II WP 3F HOUSING(CAM POSITION SENSOR)	PBT	SEE TABLE
②	MG674452	090 II WP 3F F/HOLDER	PBT	NATURAL
③	R600082	090 II WP 3F INNER SEAL(ISCA)	SILICONE	RED

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	090 II WP
						INSULATION		TYPE	
2	ECO-1508-218 근거 도면 재작성 (INNER SEAL 이탈현상개선)	KCS	CKY	LSY	'15.08.21	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG644554
1	ECO-1412-104 근거 도면 재작성 (JF차중 엔진룸 미관개선을 위한 색상추가)	KSJ	HYJ	LSY	'14.12.09				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE				
DR.	KMH 2009.06.04	CHK.	HEM		2009.06.04	PART NAME			
CHK.	CWK 2009.06.04	APP.	KKJ		2009.06.04	090II WP 3F ASSY (CAM POSITION SENSOR)			