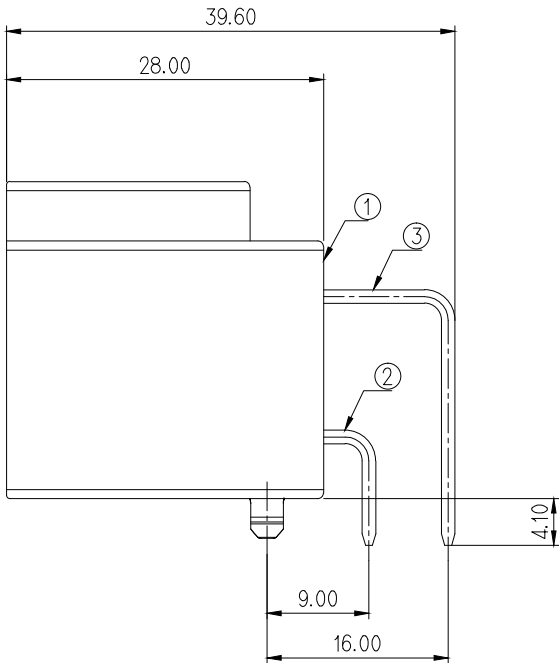
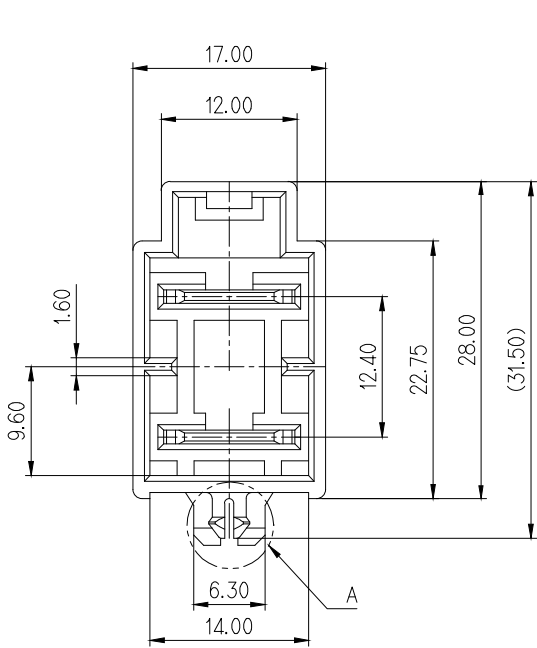




GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기



1. 지시하지 않은 반경 R은 0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
3. 단자 압입후 전후 방향의 미삽입이 없을것.
4. 적용 PLUG HOUSING : MG610557
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIOUS
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. AFTER THE TERMINAL IS INSERTED UNDER PRESSURE, IT MUST BE FREE FROM LOOSENESS IN HORIZONTAL DIRECTION.
4. MATING PLUG HOUSING : MG610557
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

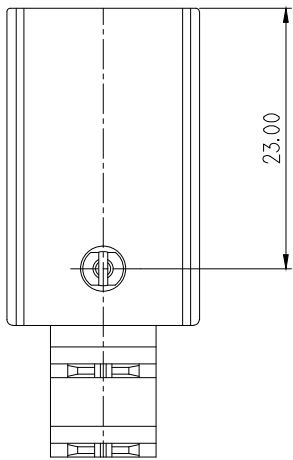

DETAIL A
(S= 5/1)

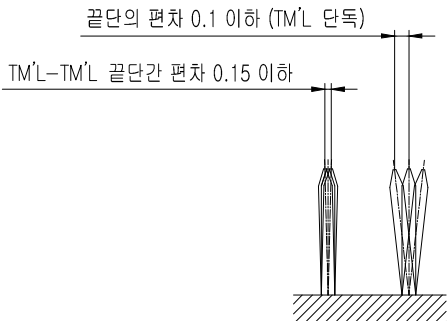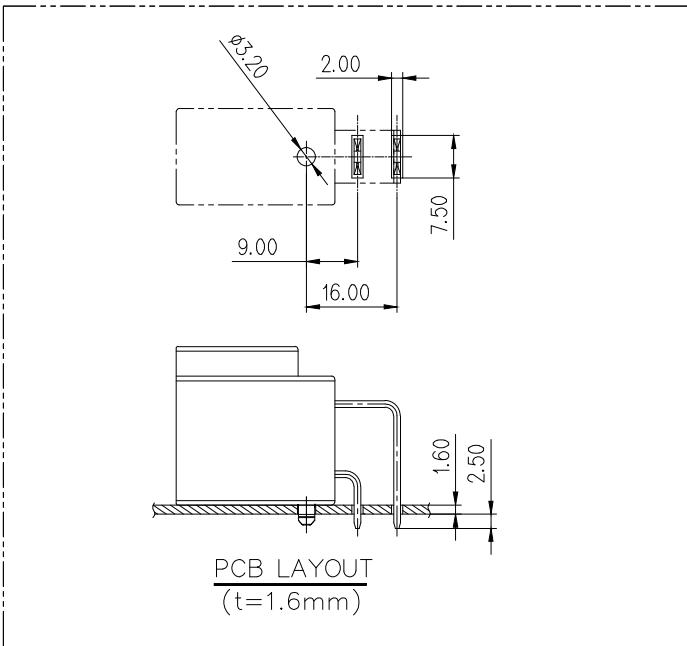

TERMINAL ARRANGEMENT ALLOWABLE LIMITS
단자 정렬 허용범위

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 3

ISSUE MARK

						MATERIAL SEE TABLE		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION			
						TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	
						PART NAME		MG644710	