


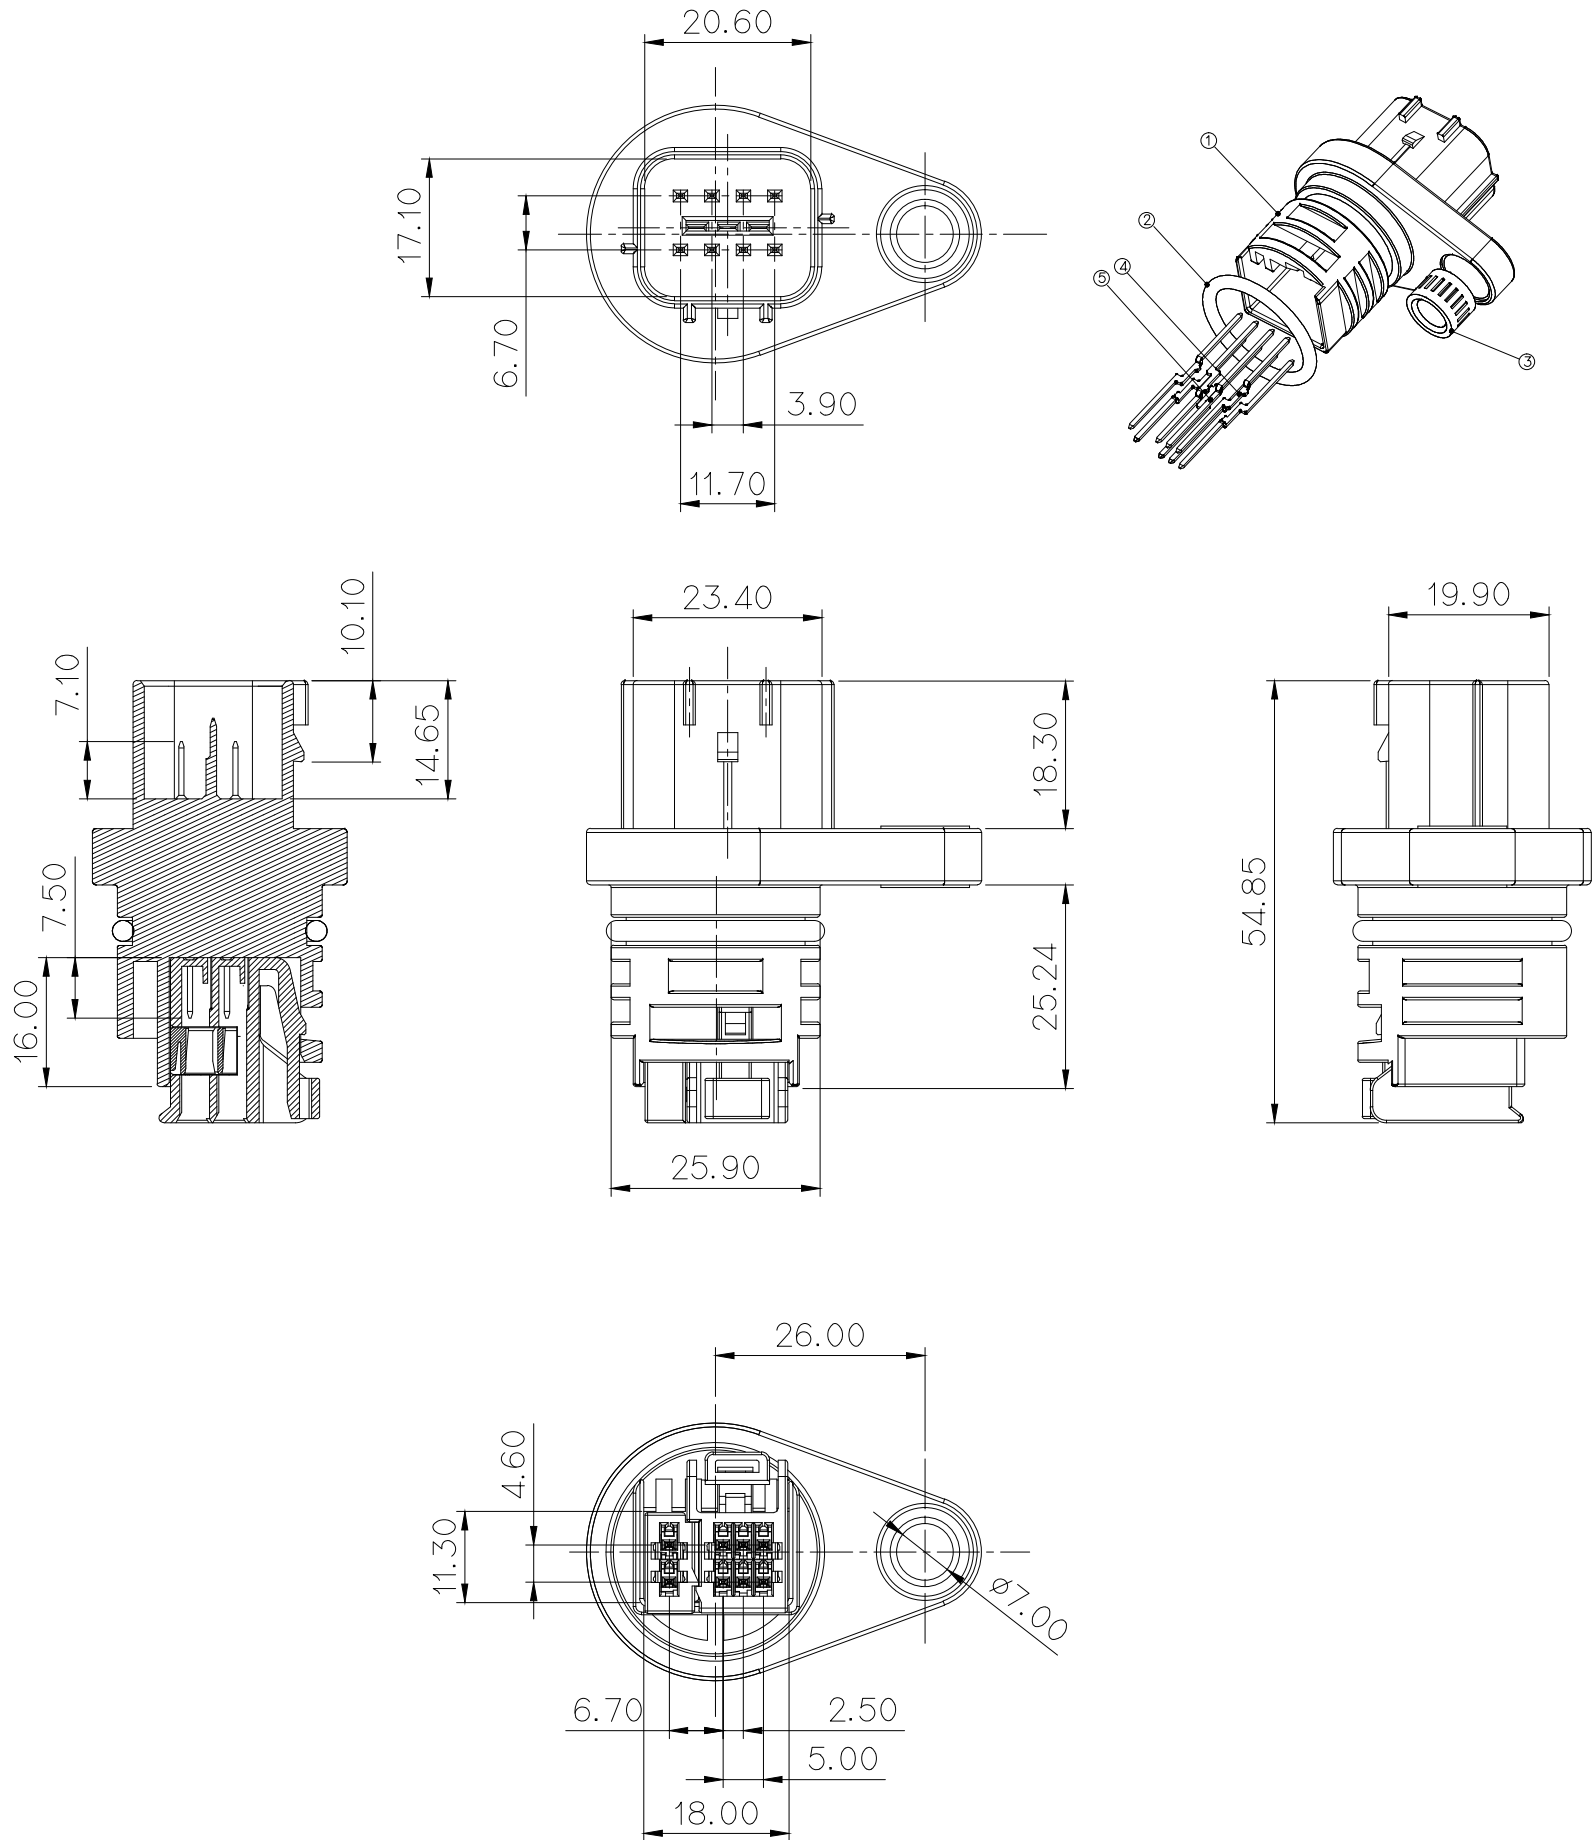

5	MOTOR SENSOR CONN'T ASS'Y	MG644801	040 TAB TERMINAL B	COPPER ALLOY	2	PRE-TIN
4			040 TAB TERMINAL A	COPPER ALLOY	6	PRE-TIN
3			BUSH	STEEL	1	Chromate
2			O-RING	H-NBR	1	BLACK
1			MOTOR SENSOR CONN'T	PA66+GF30%	1	BLACK
NO.	ASSY NAME	ASSY NO	PART NAME	MATERIAL	QTY	FINISH

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS / 0.3 CHAMFER
- UNDER SERVICE CONDITION OF THIS PART MUST BE AS FOLLOWS.
- WHERE TO BE INSTALLED : MOTOR SESOR
- CONNECTOR SPEC BASE ON ES91500-00
- APPLICABLE HS'G : 040 WP 8F ASS'Y-MG644803
040 2P-MG654806/040 6P-MG654809
- APPLICABLE TM'L : 040 WP-ST730924-3,0925-3
040III : ST731007-3,0770-3,0960-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 제품 기능상 유해한 BURR, 변형 및 WELDLINE등이 없을 것.
- 지시 없는 C=0.3 ,R=0.3
- 본부품의 사용 조건은 하기에 따름.
설치 장소 : MOTOR SENSOR부
- CONNECTOR SPEC ES91500-00에 따른다
- 적용 HOUSING : 040 WP 8F ASS'Y- MG644803
040 2P- MG654806/040 6P-MG654809
- 적용 FEMALE TERMINAL : 040 WP : ST730924-3,0925-3
040III : ST731007-3,0770-3,0960-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE		CLASS		
					INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/2	PART NO. MG644801
DR. JYS '10.07.28			CHK.			PART NAME			
CHK.			APP. KKJ '10.07.28			MOTOR SENSOR CONN'T 8P			