







GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL NO. : ST730924-3, ST730925-3
4. THIS PART ASSEMBLES MG644801
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

주 기

1. 지시하지 않은 반경 R은 0.3로 한다
2. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
3. 적용 TERMINAL : ST730924-3, ST730925-3
4. 본 부품은 MG644801과 조립된다.
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

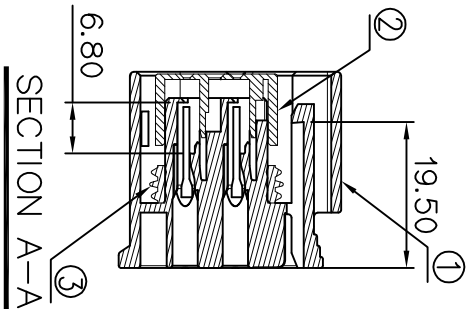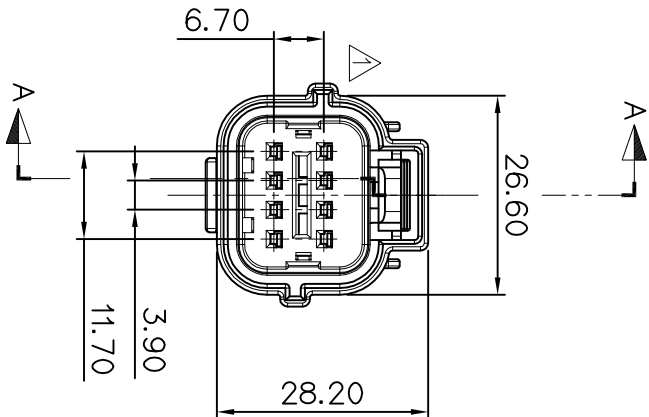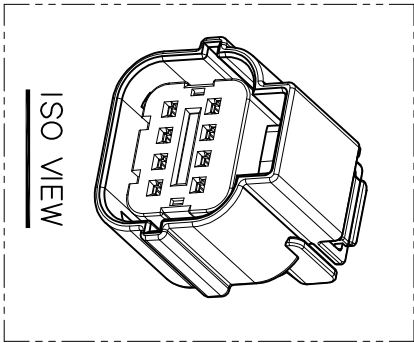

NO	PART NO	PART NAME	MATERIAL	FINISH
①	MG674804	040 WP 8F HOUSING	PBT	BLACK
②	MG674805	040 WP 8F F/HOLDER	PBT	NATURAL
③	R602252	040 WP 8F INNER SEAL	SILICONE	RED

						MATERIAL	SEE TABLE	 KEI KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE	CLASS 040 (RK)	
						INSULATION	TYPE 040 WP (RK)	
△	유동개선을 위한 영상변경	KRY			10.09.29			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG644803
DR.	JYS '09.06.11	CHK.				PART NAME	040 WP 8F ASSY	
CHK.	 '09.06.11	APP.			'09.06.11			