

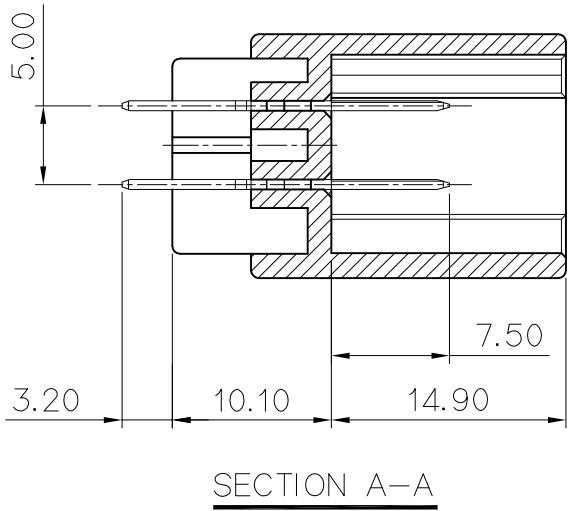
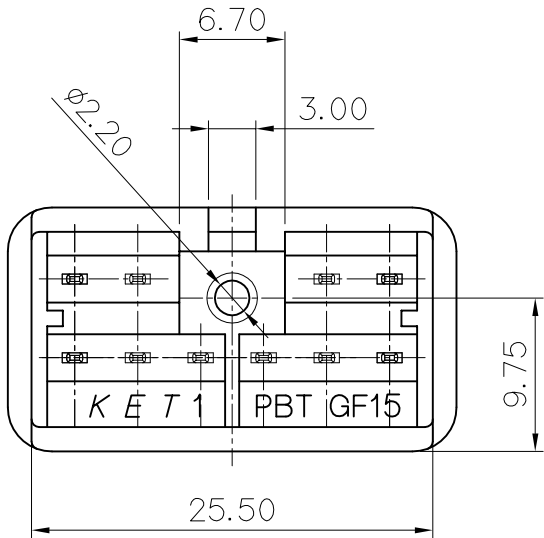
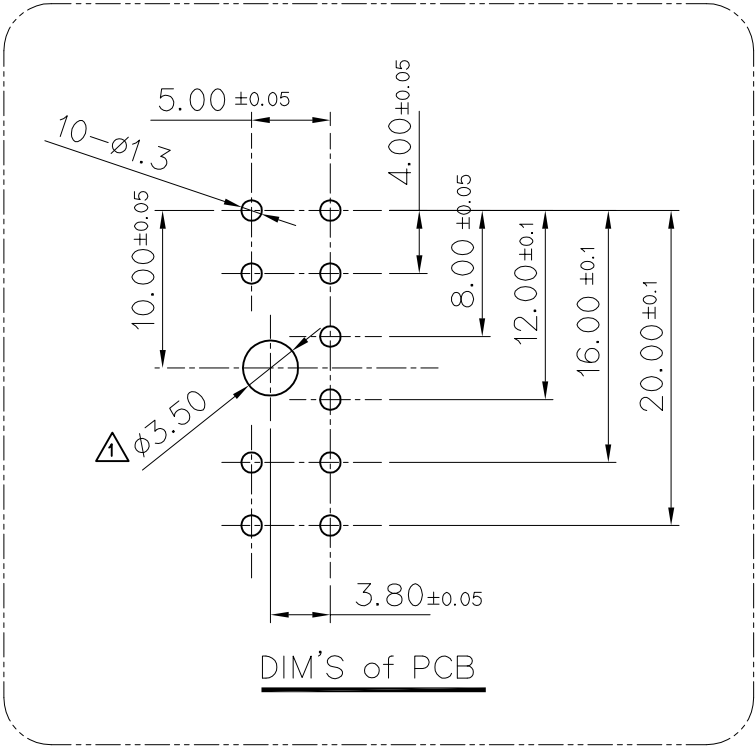


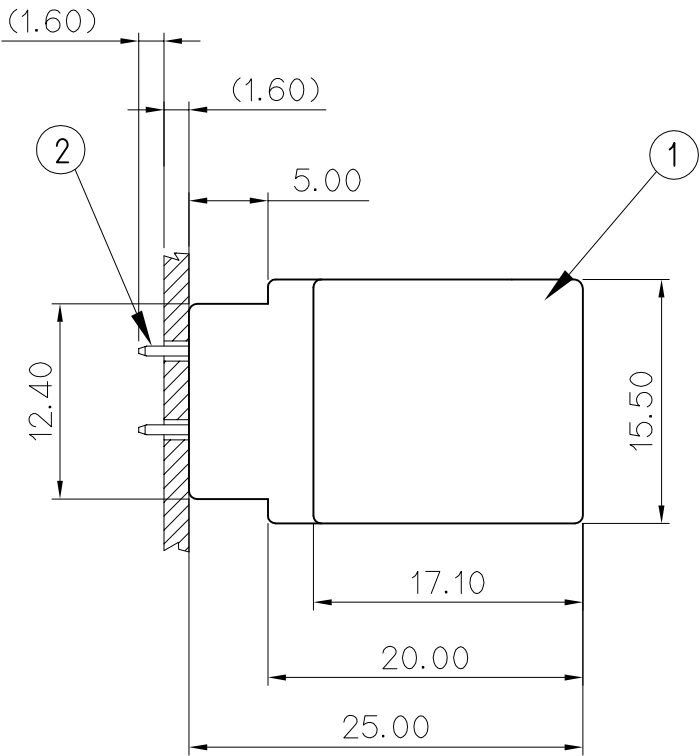

GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	20 MAX	45 MAX	ANGLE	ECCENT	10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

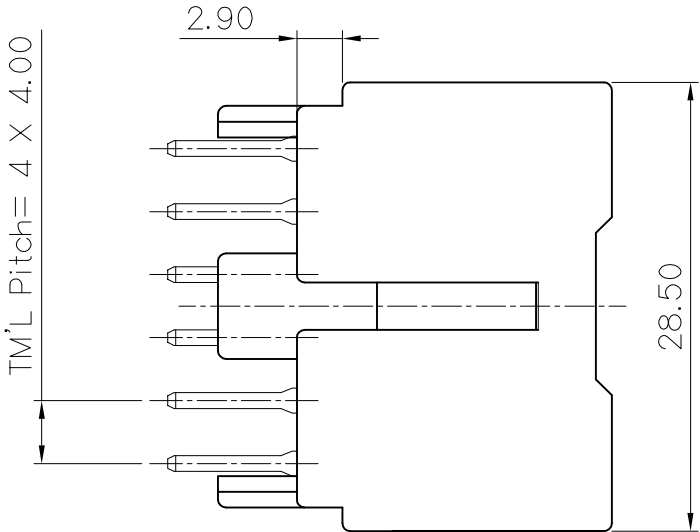


NOTE

- 지시하지 않는 R은 전부 0.5로 할것.
- 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
- 적용 HOUSING: MG651056
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS ARE TO BE 0.5 RADIUS.
- MUST BE FREE OF FLASH, BURR AND IMPERFECTION THAT AFFECT FUNCTION.
- MATING HOUSING: MG651056
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PBBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

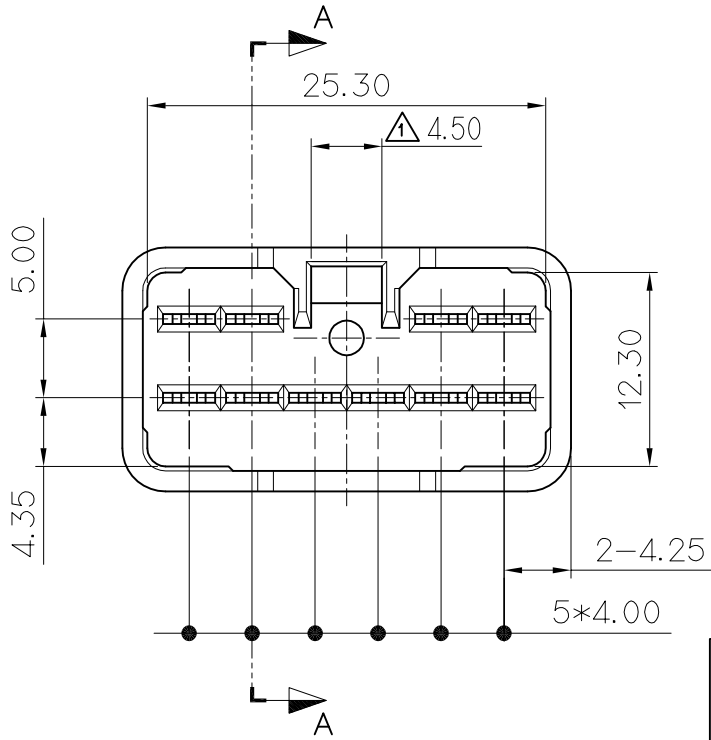

NO.	PART NAME	PART NO.	MATERIAL	Q'TY	FINISH
①	090 II 10M PCB HOUSING (VRT)	MG674836	PBT GF15	1	NATURAL
②	PCB MALE TERMINAL(VRT)	ST790215	BRASS	10	PRE-TIN

ISSUE MARK

					MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS .090 II
					INSULATION		TYPE
①	설/변(ECO-1105-313)도면 오기 수정	LSY		'11.05.26	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG644835
LTR	REVISION RECORD	DR.	CHK.	APP.			
DR.	CYJ 10.04.09	CHK.		10.04.09	PART NAME		090 II 10M PCB ASSY (VRT)
CHK.		APP.					