

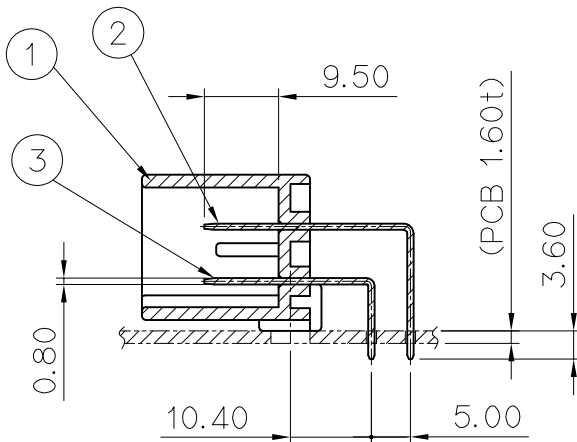
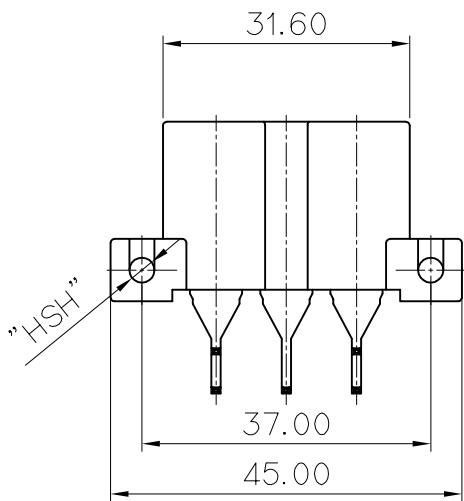
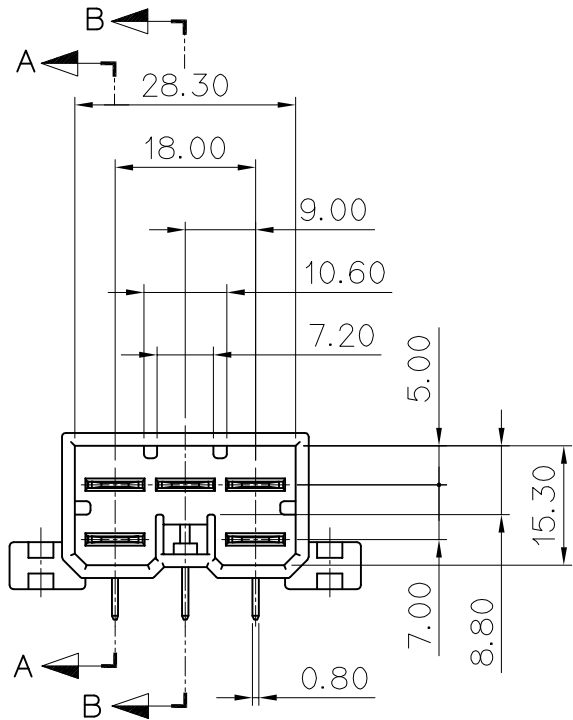



GENERAL TOLERANCE (TERMINAL)					GENERAL TOLERANCE (HOUSING)								USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT		
±0.2	±0.25	±0.3	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		



SECTION A-A

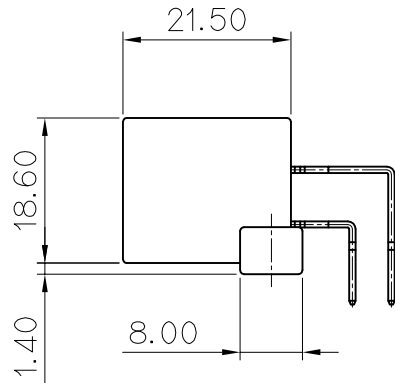

SECTION B-B

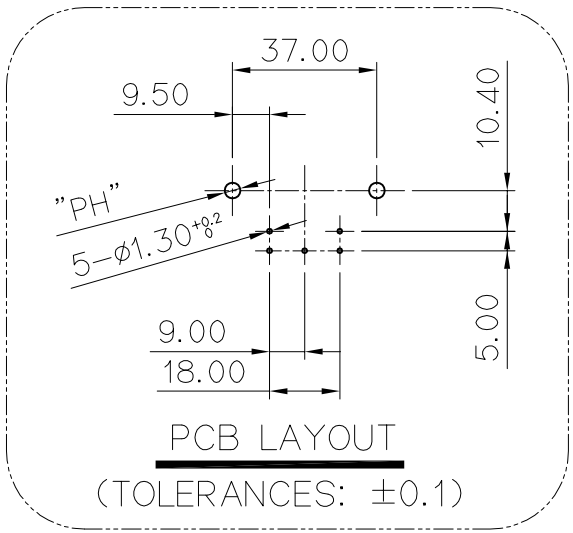

주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.지시하지 않은 모따기 C는 0.5으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 FEMALE HS'G: MG614463
- △5. 적용 BOLT(MG644462) : M3.5 일반나사
적용 BOLT(MG644881) : M3.0 일반나사
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
- 3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- 4. APPLICABLE FEMALE HS'G: MG614463
- △5. APPLICABLE MOUNTING SCREW(MG644462) : M3.5 SCREW
APPLICABLE MOUNTING SCREW(MG644881) : M3.0 SCREW
- 6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

ASSY	NO	PART NAME	PART NO	MATERIAL	FINISH	QTY	∅ SIZE	
							HSH HS'G Hole Size	PH PCB Hole Size
MG644462	①	250 5M PCB HS'G (HZT)	MG674461	NYLON66	BLACK	1	3.2	4
	②	250 PCB MALE TM'L (L)	ST792225-3	BRASS	PRE-TIN	3	-	-
	③	250 PCB MALE TM'L (S)	ST792226-3	BRASS	PRE-TIN	2	-	-
△ MG644881	①	250 5M PCB HS'G (HZT)	MG674874	NYLON66	NATURE	1	2.4	3.2
	②	250 PCB MALE TM'L (L)	ST792225-3	BRASS	PRE-TIN	3	-	-
	③	250 PCB MALE TM'L (S)	ST792226-3	BRASS	PRE-TIN	2	-	-

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE		CLASS	
						INSULATION		TYPE 250	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG644462 ⚠ MG644881
DR.	YSW 08.10.14		CHK.				PART NAME		
CHK.	⚡ 10/14		APP.			10/14	250 5M PCB ASSY (HZT)		