


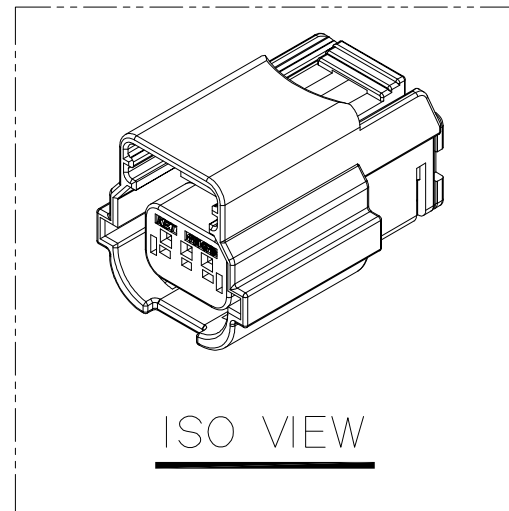
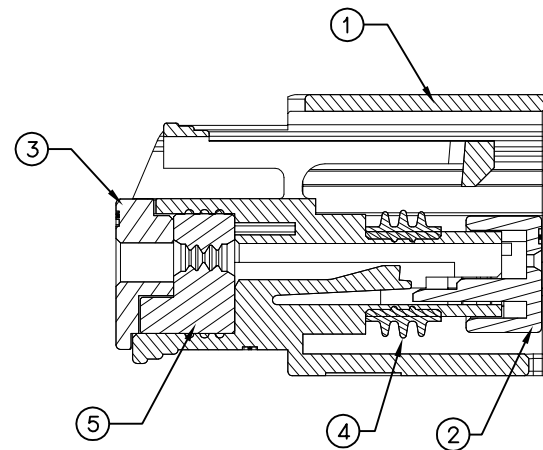


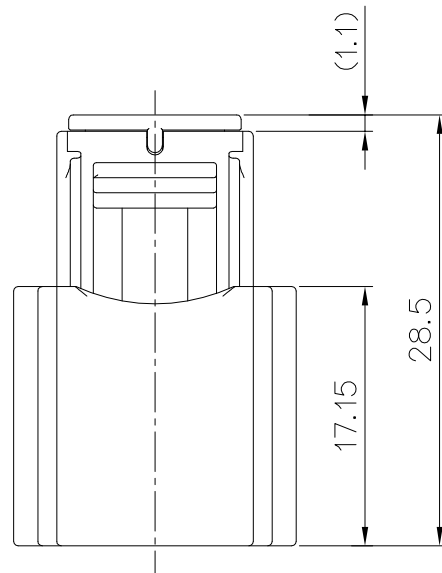

ISO VIEW

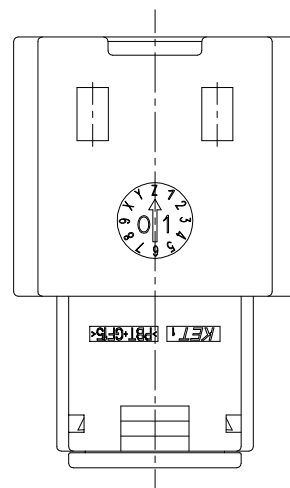



SECTION A-A

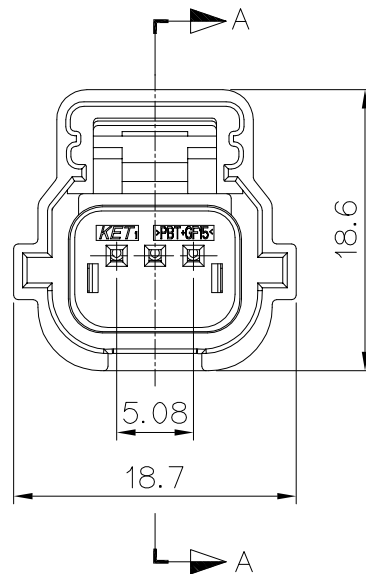

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : YAZAKI 7116-4618-02
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HAXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCEIBED UNDER EU ELV DIRECTIVE&RoHS REGULATION



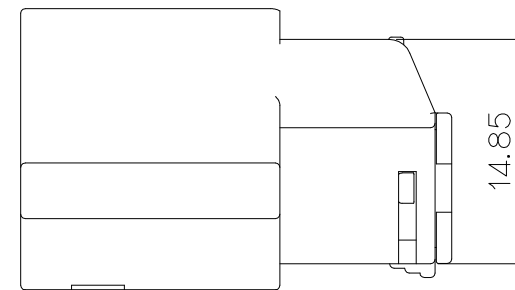


주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: YAZAKI 7116-4618-02
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 농도를 초과해서는 안된다.

NO.	PART NO.	PART NAME	MATERIAL	COLOR
①	MG675081-5	064 WP 3F HOUSING	PBT+GF15	BLACK
②	MG675082	064 WP 3F TPA	PBT+GF15	NATURAL
③	MG675083-5	064 WP 3F R/H	PBT+GF15	BLACK
④	R602281	064 WP 3F Inner Seal	SILICONE	RED
⑤	R602282	064 WP 3F Block Seal	SILICONE	RED

SEE TABLE	
DIE NO	ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH	SEE TABLE			
					WIRE RANGE			CLASS 064	
					INSULATION			TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
	DR. JES. 11.07.12	CHK.				SEE TABLE	2/1	MG645080	
CHK.	_____	APP.			064 WP 3F ASSY				