

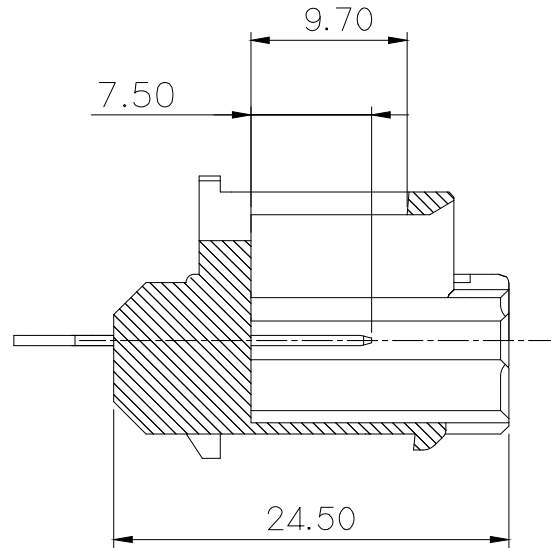
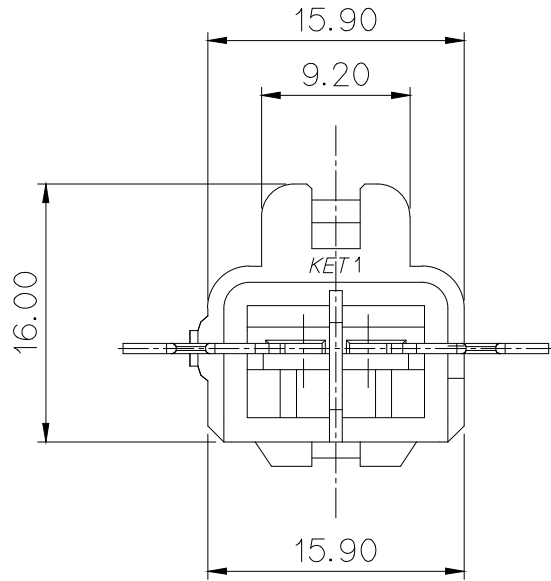
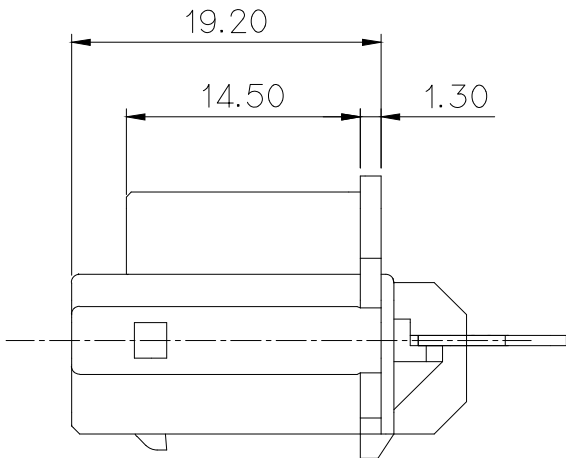
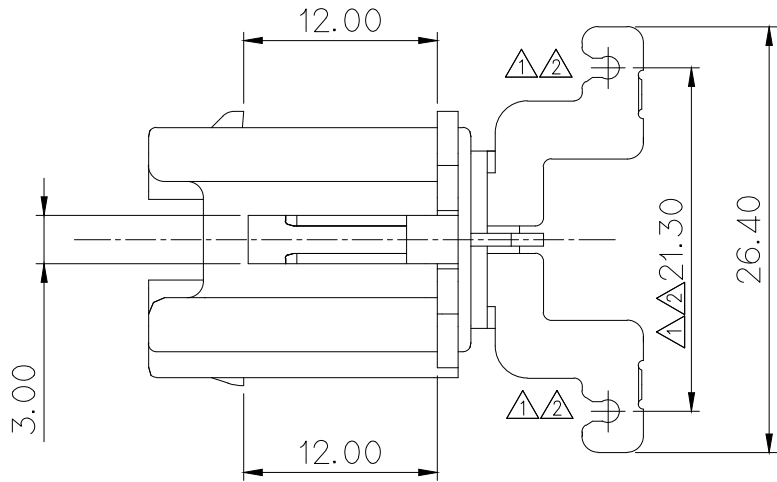


주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 PLUG HS'G : MG651026
- 3.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

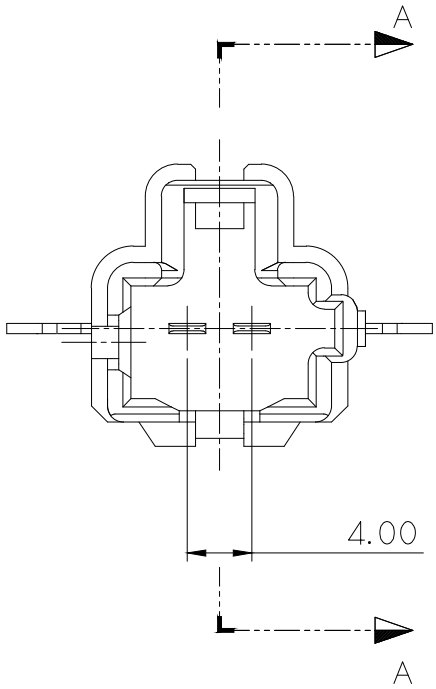

SECTION A-A

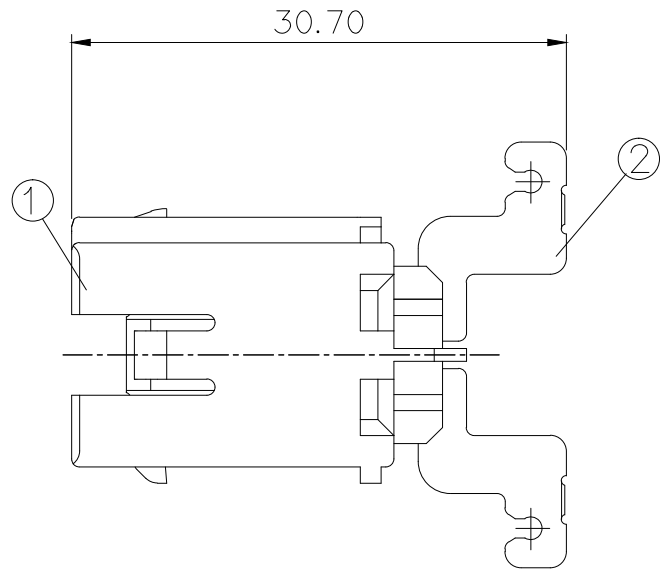

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE PLUG HS'G : MG651026
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

부품 구성표

NO	PART NO.	PART NAME	MATERIAL	FINISH	Q'TY
①	MG673521	090 II 2M HS'G(SPK)	PBT	BLACK	1
②	ST792295	090 II M TM'L(SPK)—"D"	BRASS	PRE-TIN	2

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		SEE TABLE		
					WIRE RANGE		CLASS	090 II	
	ECO-1207-137 근거 도면 재작성 (WIRE 걸림부 HOLE 중대)	AJH	UYH	HSB	12.07.20	INSULATION		TYPE	
	설계사양변경(S100189)근거 도면재작성	JSY			10.08.16				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG645098
DR. CDH 10.06.22			CHK. HKS 10.06.22			PART NAME			
CHK.  10.06.22			APP.  10.06.22			090 II 2M ASSY(SPK)-"D"			

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK