





GENERAL TOLERANCE (TERMINAL)								GENERAL TOLERANCE (HOUSING)							USED ON
1 MAX	5 MAX	10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.1	±0.15	±0.2	±0.25	±0.3	±0.5	±30'	0.1	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


1. 기능상 유해한 BURR, WELDLINE 및 미성형 등이 없을것.
2. 적용 FEMALE HOUSING :MG652037
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV지침 및 RoHS 법규에서 지정한 최대허용농도를 초과해서는 안된다.

1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICATION FEMALE HOUSING : MG652037
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,PBBs,PBDEs,HEXAVALENT CHROMIUM) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.


NO.	PART NAME	MATERIAL	FINISH	Q'TY
(A)	3109 6M PCB Housing(VRT)	PBT+GF10%	NATURAL	1 EA
(B)	312II PCB TAB TML (VRT)	BRASS	PRE-TIN	2 EA
(C)	090II PCB TAB TML (VRT)	BRASS	PRE-TIN	4 EA

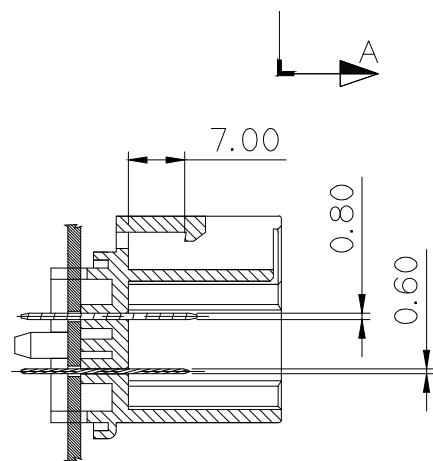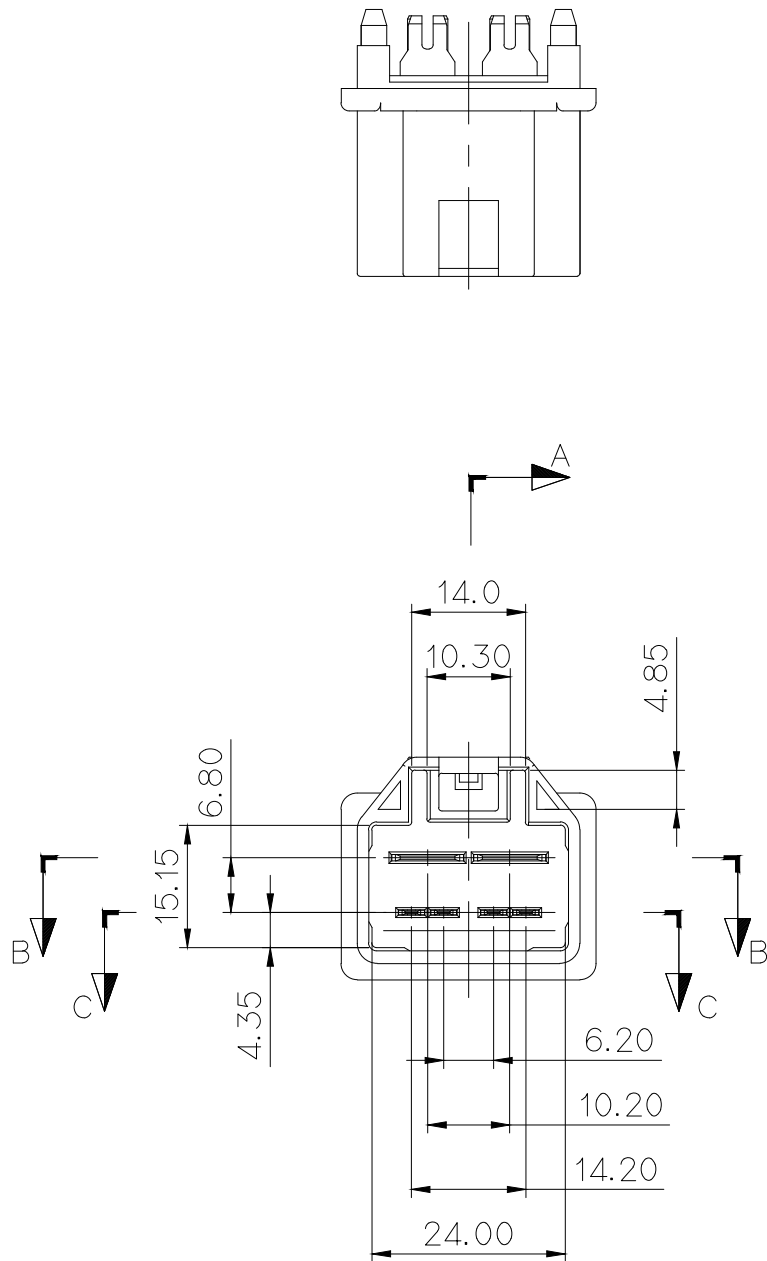




SECTION A-A

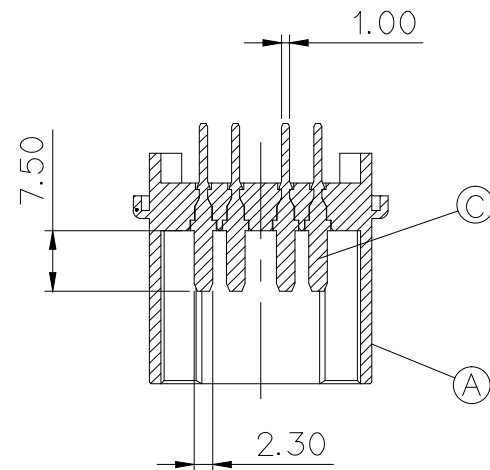

SECTION C-C

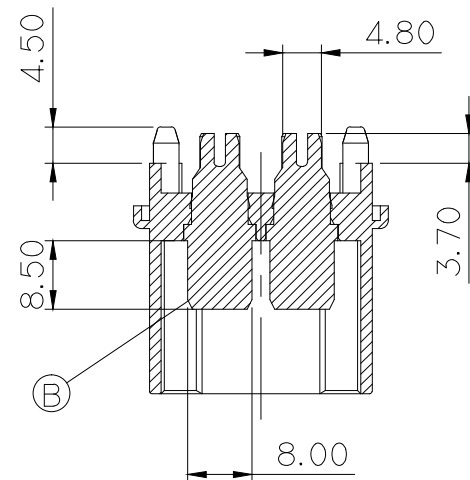

SECTION B-B

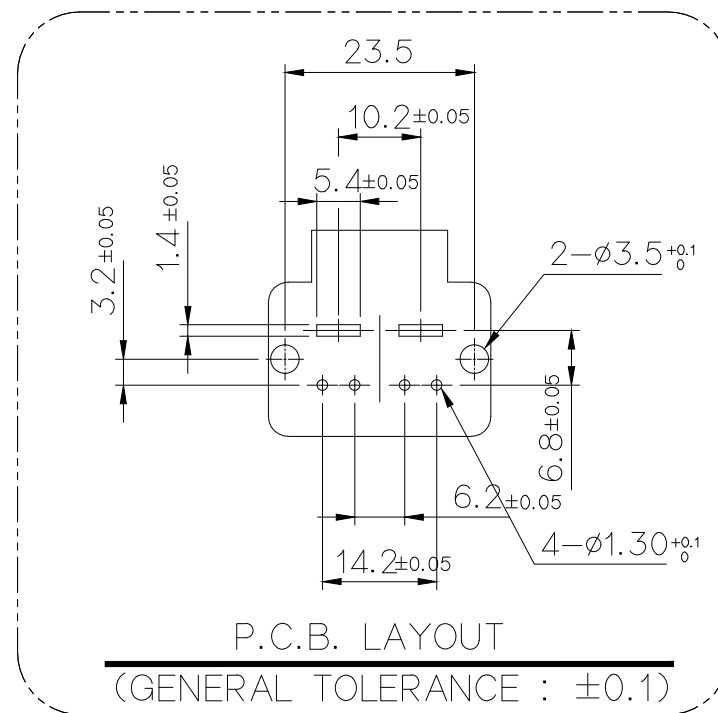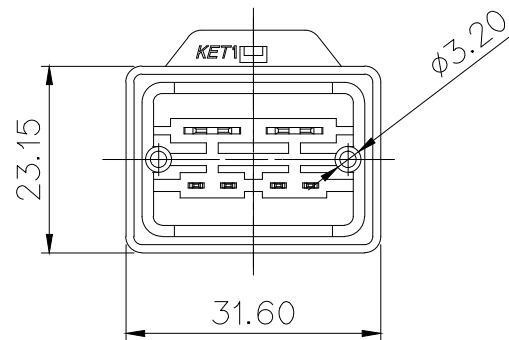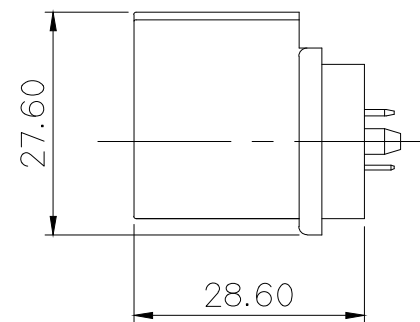

P.C.B. LAYOUT
(GENERAL TOLERANCE : ± 0.1)

					MATERIAL	SEE TABLE		KOREA ELECTRIC	
					FINISH	SEE TABLE		TERMINAL CO., LTD.	
					WIRE RANGE			CLASS	3109
					INSULATION			TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	CYJ	2011.07.25	CHK.				SEE TABLE	1/1	MG645221
CHK.	HEM	2011.07.25	APP.	HSH	2011.07.25	3109 6M PCB ASSY (VRT)			

APPROVED

2018-12-07

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

IKET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS 3109

TYPE

PART NO. MG645221

3109 6M PCB ASSY (VRT)